

Type: LF2628

◆ Product Description


- 27.0×19.5mm Max.(L×W), 29.0mm Max. Height .
- Inductance range: 2.2mH~100mH
- Rated current range: 0.5~3.0A
- In addition to the standard versions of parameters shown here, custom designs are available to meet your exact requirements.



◆ Feature

- Large inductance is possible with closed magnetic core.
- Inexpensive type.
- Excellent attenuation characteristics in low frequency range.
- Ideally used in TV,VCR,AV,OA equipment for noise prevention.
- RoHS Compliance


◆ Dimensions (mm)

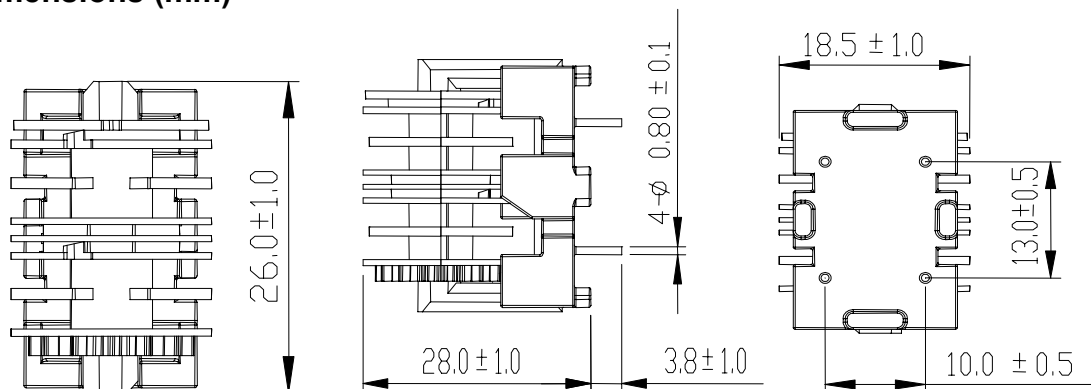

* Dimension does not include solder used on coil.

* Terminal pitch is measured at the base(not from tip of the pin)

◆ Schematics (Bottom)



* Winding start is #1,#4 or #2,#3.

* #1, #2 : should be same polarity.

Type: LF2628
◆ Specification

Part No.	Stamp	Inductance [MIN.](mH) (1-2)(4-3) 1kHz/1V	D.C.R. (Ω) [MAX.] (1-2)(4-3) (at 20℃)	Rated Current (50/60Hz) (Arms)※1
LF2628NP-222	222	2.2	0.10	3.0
LF2628NP-332	332	3.3	0.15	2.5
LF2628NP-752	752	7.5	0.25	2.0
LF2628NP-912	912	9.1	0.30	1.8
LF2628NP-103	103	10.0	0.40	1.5
LF2628NP-153	153	15.0	0.55	1.2
LF2628NP-223	223	22.0	0.7	1.0
LF2628NP-333	333	33.0	1.0	0.8
LF2628NP-473	473	47.0	1.4	0.7
LF2628NP-623	623	62.0	1.8	0.6
LF2628NP-823	823	82.0	2.4	0.5
LF2628NP-R332	R332	3.3	0.10	3.0
LF2628NP-R472	R472	4.7	0.15	2.5
LF2628NP-R822	R822	8.2	0.25	2.0
LF2628NP-R113	R113	11.0	0.30	1.8
LF2628NP-R153	R153	15.0	0.40	1.5
LF2628NP-R183	R183	18.0	0.55	1.2
LF2628NP-R273	R273	27.0	0.7	1.0
LF2628NP-R393	R393	39.0	1.0	0.8
LF2628NP-R513	R513	51.0	1.4	0.7
LF2628NP-R753	R753	75.0	1.8	0.6
LF2628NP-R104	R104	100.0	2.4	0.5

* Rated voltage:250V AC.

※1. Rated current: The AC current at which the temperature rise is $\Delta t=50^{\circ}\text{C}$.($T_a=20^{\circ}\text{C}$).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) ***category:***

Click to view products by [Sumida](#) ***manufacturer:***

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)