



TAOGLAS®



Datasheet

7-in-1 Raptor III

Part No:
MA1290.K.LBICGRT.001

Description:

7-in-1 Shark Fin Style Combination Antenna including 2 Whip Antennas
GNSS, 2*5G/4G MIMO, 2*Wi-Fi MIMO, VHF/UHF(TETRA)/LMR and AM/FM

Features:

1* Active GPS/GLONASS/BeiDou/Galileo L1/B1/E1

2* Worldwide 5G/4G MIMO

2* 2.4 GHz/5.8 GHz Dual-Band Wi-Fi MIMO

1* Active AM/FM

1* VHF/UHF/LMR/700-900MHz Depending on Whip Used:

- FW.19.M6.F (431mm) covering VHF/UHF(TETRA)/LMR bands 130-150MHz and 350-470MHz
- FW.79.M6.F (65mm) covering LMR bands 700 - 900MHz

Housing Dimensions: 190 x 95 x 92mm, Whip Dimensions: 65 x Ø13mm

Braided 3m cable assembly

GNSS, AM/FM, 5G/4G MIMO: SMA(M) Connector

Wi-Fi MIMO: RP-SMA(M) Connector

RoHS & REACH Compliant



1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	10
4.	Packaging	11
5.	Installation	12
6.	Active Antenna Characteristics	14
7.	Antenna Characteristics	17
8.	Radiation Patterns	26
9.	Application Note	44
	Changelog	56

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland & USA
ISO 9001:2015
Certified



Taiwan
ISO 9001:2015
Certified




046



IATF16949



1. Introduction

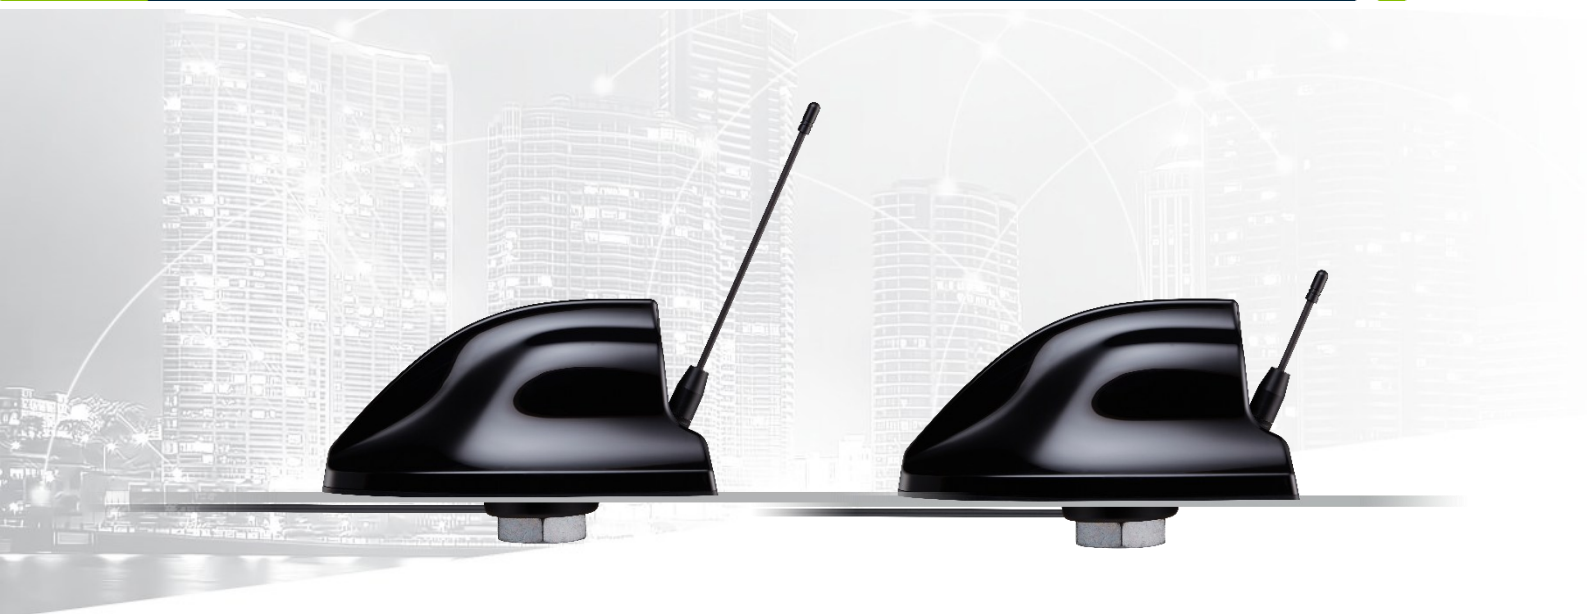

The Taoglas Raptor III MA1290 is a high performance 7-in-1 “Shark Fin” style combination antenna. It provides multiple antenna connections in a sleek, covert enclosure and is suitable for all automotive and commercial trucking applications. The Raptor III has been engineered to be mounted directly on the vehicle roof and is supplied with 3m cables and SMA connectors as standard. The Raptor III is designed to combine and active multiband GNSS (GPS/GLONASS/BeiDou/Galileo), 2*5G/4G Cellular MIMO, 2*Dual-Band Wi-Fi, Active AM/FM and is supplied with two whip antennas. The larger FW.19.M6.F whip covers VHF/UHF(TETRA)/LMR frequencies at 130-150 and 350-470, or the shorter FW.79.M6.F covers 700-900MHz depending on regional specific applications.

All high-performance antennas are packaged in a compact, robust, IP67 rated enclosure. The whip antennas attach to the rear of the enclosure covers all frequency bands used for specialist communication systems such as public safety and first responders.

The cellular antennas in the Raptor III cover all 4G, and the new Sub 6GHz 5G cellular bands offering efficiencies of up to 80%. Fallback to 3G and 2G bands are possible where 5G and 4G is not accessible. The high performing Wi-Fi antennas cover both the 2.4GHz and 5.8GHz Wi-Fi bands and are supplied with SMA(M) / RP-SMA(M) connectors as standard. The whip antennas cover LMR and Terrestrial Trunked Radio (TETRA) bands. They are connected via a threaded M6 Female connector to the M6 male connector on the enclosure. Low loss 1.5DS cables are used that can allow for longer cable installations if required.

The Raptor III has a robust, impact resistant, UV resistant, PC enclosure and is easy to install. It requires just one single M20 hole, unlike many other vehicle mount solutions currently on the market that require multiple mounting holes. This single hole mounting substantially reduces installation time & cost and reduces damage to the vehicle.


Typical Applications Include:

- Transportation and Fleet Management
- Autonomous Driving and Robotics
- FirstNet, First Responders and Emergency Services

The cables, connectors and whip are fully customizable, the antenna is supplied with two whip antennas in the package. For further information or installation instructions contact your regional Taoglas customer support team

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	□	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	□	□	□

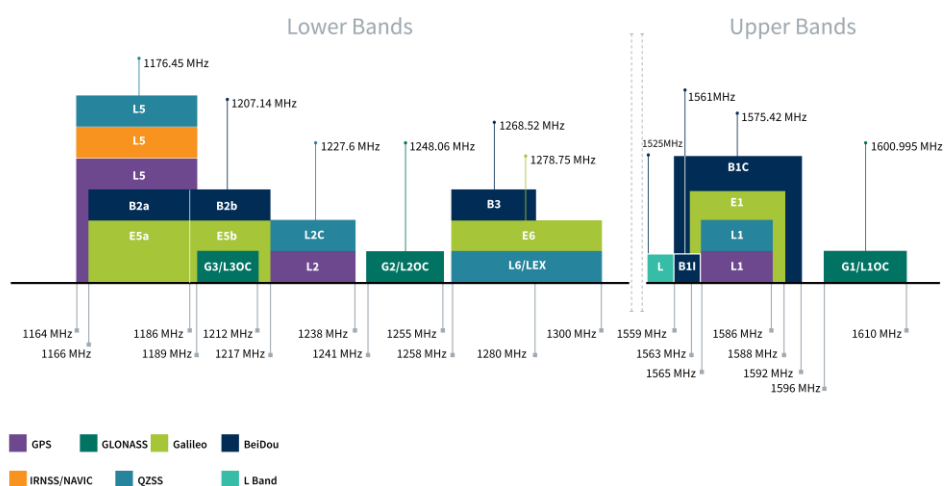

GNSS Bands and Constellations

GPS/GLONASS/BeiDou/Galileo Electrical			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.0:1	2.0:1	2.0:1
Efficiency (%)	53.3	55.8	60.6
Peak Gain (dBi)	2.8	3.3	3.7
Polarization	RHCP		
Impedance	50Ω		
Cable	3-meter standard, fully customizable		
Connector	SMA(M) standard, fully customizable		

LNA and Filter Electrical Properties			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.0:1	2.0:1	2.0:1
Gain@1.8V (Typ.)	23 dB	23 dB	23 dB
Gain@3.0V (Typ.)	29 dB	28 dB	29 dB
Gain@5.5V (Typ.)	32 dB	32 dB	31 dB
Noise@1.8V (Typ.)	2.9 dB	2.5 dB	2.8 dB
Noise@3.0V (Typ.)	2.9 dB	2.6 dB	2.7 dB
Noise@5.5V (Typ.)	3 dB	2.6 dB	2.9 dB
Power consumption@1.8V (Typ.)	4.5 mA		
Power consumption@3.0V (Typ.)	10 mA		
Power consumption@5.5V (Typ.)	22 mA		
Total Specification (Through Antenna, SAW Filter and LNA)			
Frequency (MHz)	1561	1575.42	1602
Gain@3.0V (Typ.)	35 dB	35 dB	35 dB
Impedance	50Ω		

5G/4G Electrical

Band	Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
5G NR/4G Band 71	617~698	MIMO 1	21.5	-6.7	-3.7	50Ω	10W	Linear	Omni
		MIMO 2	21.3	-6.7	-3.8				
4G/3G Band 12,13,14,17,28,29	698~806	MIMO 1	24.8	-6.1	-1.9				
		MIMO 2	27.7	-5.6	-2.3				
4G/3G Band 5,8,18,19,20,26,27	824~960	MIMO 1	32.1	-4.9	-0.3				
		MIMO 2	33.5	-4.8	-0.8				
5G NR/4G Band 21,32,74,75,76	1427~1518	MIMO 1	36.2	-4.4	1.6				
		MIMO 2	28.7	-5.4	0.8				
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710~2200	MIMO 1	35	-4.4	3.6				
		MIMO 2	35.2	-4.5	2				
4G/3G Band 7,38,41	2490~2690	MIMO 1	30.4	-5.2	1.6				
		MIMO 2	31.2	-5.1	1.8				
5G NR Band 22,42,48,77,78,79	3300~5000	MIMO 1	20.3	-6.9	-0.7				
		MIMO 2	19.6	-7.1	0.6				
LTE5200/ Wi-Fi 5800	5150~5925	MIMO 1	16.1	-7.9	0.1				
		MIMO 2	17.2	-7.6	0.4				

*Tested on 30x30cm ground Plane with 3m TGC-1.5DS Cable

Wi-Fi Electrical

Band	Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Max Power Input	Polarization	Radiation Pattern
2.4GHz Wi-Fi	2400~2500	MIMO 1	29	-5.4	0	50 Ω	10W	Linear	Omni
		MIMO 2	30.4	-5.2	-0.1				
5.8GHz Wi-Fi	5150~5850	MIMO 1	19.5	-7.1	0.1				
		MIMO 2	21.8	-6.6	0.9				

*Tested on 30x30cm ground Plane with 3m TGC-1.5DS Cable

VHF/UHF/LMR Electrical	
Frequency (MHz)	135-900MHz
VSWR (max.)	3.8:1
Efficiency (%) typ	30
Peak Gain (dBi) typ	1.6
Average Gain (dB) typ	-5
Return Loss (dB)	-11.5
Polarization	Linear - Vertical
Impedance	50Ω
Cable	TGC-200, 3-meter standard, fully customizable
Connector	Mini UHF(M) standard, fully customizable


Active AM/FM Electrical	
AM Radio Bands	FM Radio Bands
535-1605KHz	88-108MHz
FM LNA Gain @12V	15dB

Mechanical	
Dimensions (Not including Whip)	Length - 191mm / Width - 95.7mm / Height - 98.3mm
Whip Length	Long Whip(Wideband) – 430mm Short Whip(LMR Only) – 65mm
Whip Coil Diameter	Ø6mm
Whip Base Diameter	Ø14mm
Enclosure	UV Resistant PC
Cable	3m Braided TGC-200
Connector	GNSS, AM/FM, 5G/4G MIMO: SMA(M) Wi-Fi MIMO: RP-SMA(M) VHF/UHF(TETRA)/LMR (130-150,350-470,700-900MHz): Mini UHF (M)
Base and Thread	Nickel plated steel
Thread Diameter	M20 1.5P
Weight (including cables & whip)	972g
Environmental	
Protection	IP67
Temperature Range	-40°C to +85°C
Cable Pull Force	17.28 Kgf-cm


5G/4G Bands MIMO 1 & 2			
Band Number	5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✓
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: -	DL: 717 to 728	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 – 1496	✓
34	2010 to 2025		✓
35	1850 to 1910		✓
38	2570 to 2620		✓
39	1880 to 1920		✓
40	2300 to 2400		✓
41	2496 to 2690		✓
42	3400 to 3600		✓
43	3600 to 3800		✓
46	5150 to 5925		✓
48	3550 to 3700		✓
66	UL: 1710-1780	DL: 2110-2200	✓
71	617 to 698		✓
74/75/76	1427 to 1518		✓
77	3300 to 4200		✓
78	3300 to 3800		✓
79	4400 to 5000		✓
85	698 to 746		✓

*Bands References from: XGP Forum


3. Mechanical Drawing

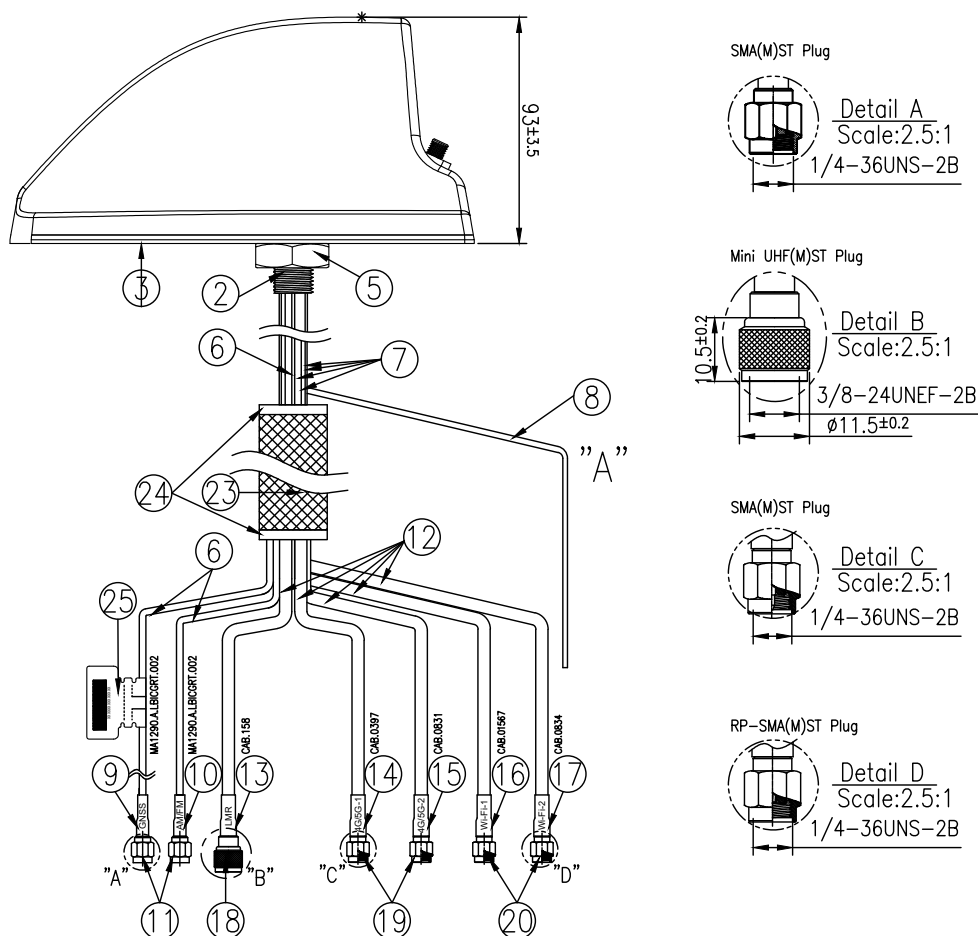

Whip Antenna-2(FW.79.M6.F):
700-900MHz Flexible Whip Antenna with M6 Female Connector

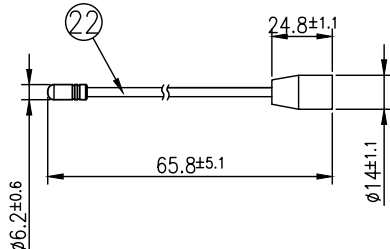


Whip Antenna-1(FW.19.M6.F):
150-174/430-520/700-900MHz Flexible Whip Antenna with M6 female connector

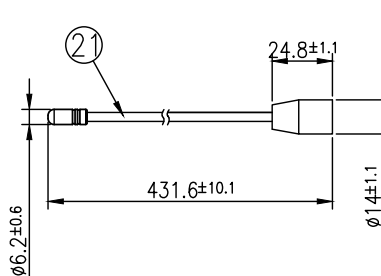


Name	Material	Finish	QTY
1 Top Housing	PC 945	Black	1
2 Housing Bottom	Zinc No.3	Ni Plated	1
3 Rubber-1	Silicone Rubber	Black	1
4 Cable Rubber	Silicone Rubber 50'	Black	1
5 Nut(M20x1.5Px9.5H Out)	Steel Carbon	NE-Zn plated	1
6 RG174 Coaxial Cable (MA1290.ALBGCR1.002)	PVC	Black	3
7 TGC-1.5S Coaxial Cable (MA1290.ALBGCR1.002)	XLPE	Black	4
8 Power Cable	PVC	Red	1
9 Heat Shrink Tube (RGSS)	PE	Blue Tube/White Text	1
10 Heat Shrink Tube (AM/TM)	PE	Green Tube/White Text	1
11 SMA(M)ST for RG174	Brass	Au Plated	2
12 TGC200 Coaxial Cable	PE	Black	5
13 Heat Shrink Tube(LMR)	PE	Green Tube/White Text	1

Name	Material	Finish	QTY
14 Heat Shrink Tube(4G/5G-1)	PE	Red Tube/White Text	1
15 Heat Shrink Tube(4G/5G-2)	PE	Red Tube/White Text	1
16 Heat Shrink Tube (W-F1-1)	PE	Yellow Tube/Black Text	1
17 Heat Shrink Tube (W-F1-2)	PE	Yellow Tube/Black Text	1
18 Mini UHF(M)ST	Brass	Ni Plated	1
19 SMA(M)ST	Brass	Au Plated	2
20 RP-SMA(M)ST	Brass	Au Plated	2
21 Whip Antenna-1	PE	Black	1
22 Whip Antenna-2	PE	Black	1
23 Centenary Braid	ESPET	Black	1
24 Heat Shrink Tube	PE With Glue	Black	2
25 Empty Label (48*30)	PEPA	White	1


4. Packaging

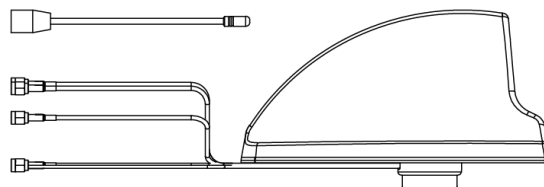


1pc MA1290.A.LBICGRT.005 per PE Bag
(Includes 2 Whips)
Weight: 972.5g



12pcs MA1290.A.LBICGRT.001 per Inner Trays

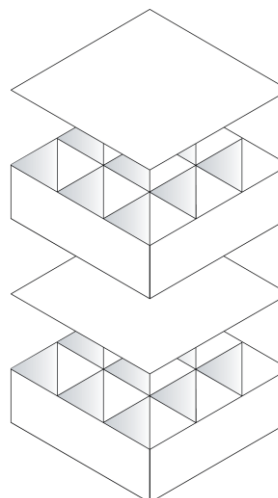

12pcs MA1290.A.LBICGRT.001 per Carton
Dimensions: 506*490*250mm
Weight: 11.67Kg

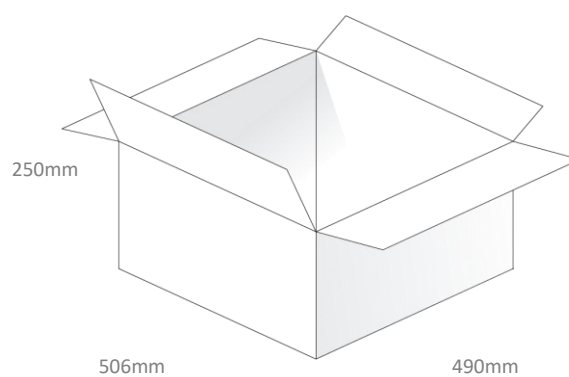

5. Installation

Installation Instructions

Raptor III Series

7-in-1 Permanent Mount Combination Antenna



A Introduction

The Taoglas Raptor III is an external combination antenna designed for mounting on the roof of a vehicle. The Raptor III can accommodate a combination of up to 7 antennas in one sleek housing. One 22mm(0.86") hole is required when installing this antenna. The cables are fed through this hole and secures the antenna to the surface with nut and washer.

The Raptor III is IP67 waterproof rated and includes a rubber base to provide a seal against water ingress.



Electrical Safety

The Raptor III MA1280 contains an active GPS/GNSS antenna.

Rated voltage: 3-5VDC Rated current: 24mA maximum

The supply to this device must be provided with over-current protection of 1A maximum.

Power consumption@1.8V (mA) 4.5 mA

Power consumption@3.0V (mA) 10 mA

Power consumption@5.5V (mA) 24 mA

B Mounting & Location

The Raptor III can be mounted on any surface, without the need for a ground plane. When mounting on a vehicle roof panel ensure to mount on a flat surface. When mounting the Raptor III, it should be placed as far as possible away from other roof-mounted features such as the aircon unit, light bar etc.



Sealing

In order to ensure that the installation is sealed against the mounting surface care must be taken regarding curvature of the mounting panel. It is highly recommended to install the antenna on a clean, flat and level surface. After installation the compression of the rubber boot against the mounting panel should be checked and a small bead of neutral cure silicone sealant can be applied around the periphery of the base of the antenna if required.

C Mounting Hole

When preparing to drill the hole, mask the area around the hole position to protect the surface. Drill a pilot hole through the panel and increase the hole size to 22mm(0.86") diameter. Ensure the drill bit does not contact the headliner. Deburr and clean the area around the hole carefully removing all waste. Remove paint and primer from under panel surface to ensure adequate earth contact by washer and nut. Apply petroleum jelly or paint around cut edge of the hole to prevent corrosion

Mount on a flat surface



D Installation of the Antenna

Feed the cables and thread through the hole. Position the antenna over the hole and press down onto the panel with pressure. A plastic washer with a slot for cable routing is added first followed by a split nut(M20). These provide options for vertical or horizontal cable routing. Secure the antenna in place by attaching the nut from the underside of the panel, only a final tighten by spanner is required.

Recommended Mounting Torque: 5N-m

E Routing and Connection of the Cables

The Cables supplied in a braided assembly for ease of installation. A power cable, colored red, is also supplied for powering the AM/FM. The heatshrink will denote which cable is which for ease of installation. Connect each individual connector to the correct port of the device, if any cable is unused please fit a 50Ω terminator to the individual connection.

G Notices



Caution

To comply with FCC RF Exposure requirements in section 1.1310 of the FCC Rules, antennas used with this device must be installed to provide a separation distance of at least 20 cm from all persons to satisfy RF exposure compliance.



Warning

Do not Operate the transmitter when someone is within 20 cm of the antenna.
Do not operate the equipment in an explosive atmosphere.



European Waste Electronic Equipment Directive 2002/96/EC

Please ensure that your old Waste Electricals and Electronics are recycled do not throw them away into standard waste.



Directive 2014/53/EU Radio Equipment Directive (RED)

Harmonised Standards and References:


EN 301 489-1 (V2.2.1): ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements. Referencing CENELEC EN 55032 Class B.

Waiver: This document represents information compiled by Taoglas to the best of our current knowledge. This is not intended to be used as a representation or warranty of fitness of the products described for any particular purpose. This document details guidelines for general information purposes only. When planning installations, always seek specialist advice and ensure that the products are always installed by a properly qualified installer in accordance with applicable regional laws and regulations.




6. Active Antenna Characteristics


6.1 Block Diagram (Active antenna)

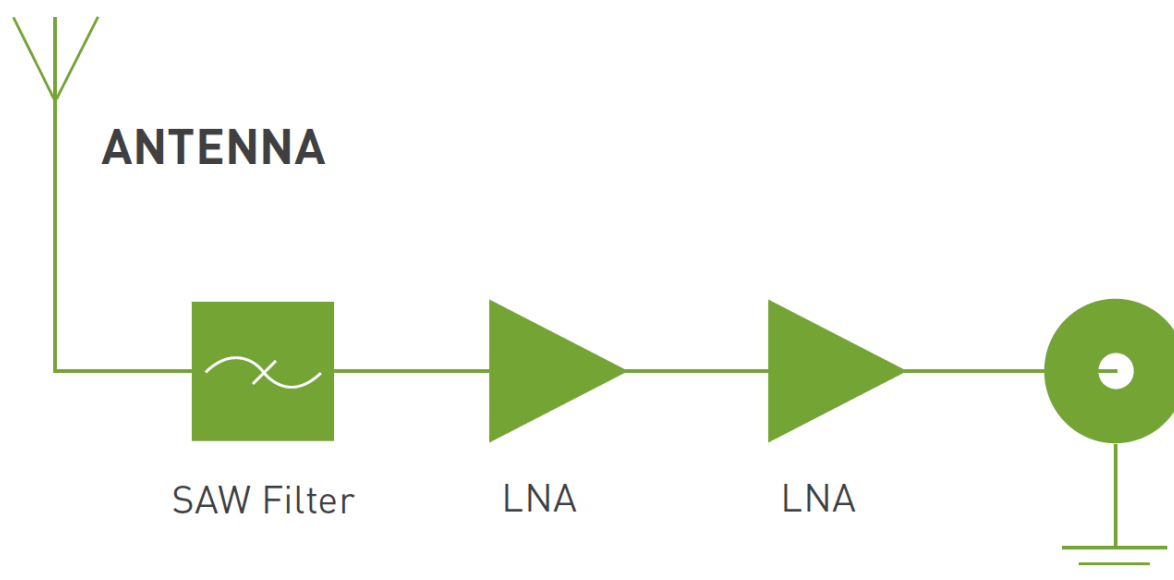


6.2 Active GNSS Measurements

GNSS LNA Gain

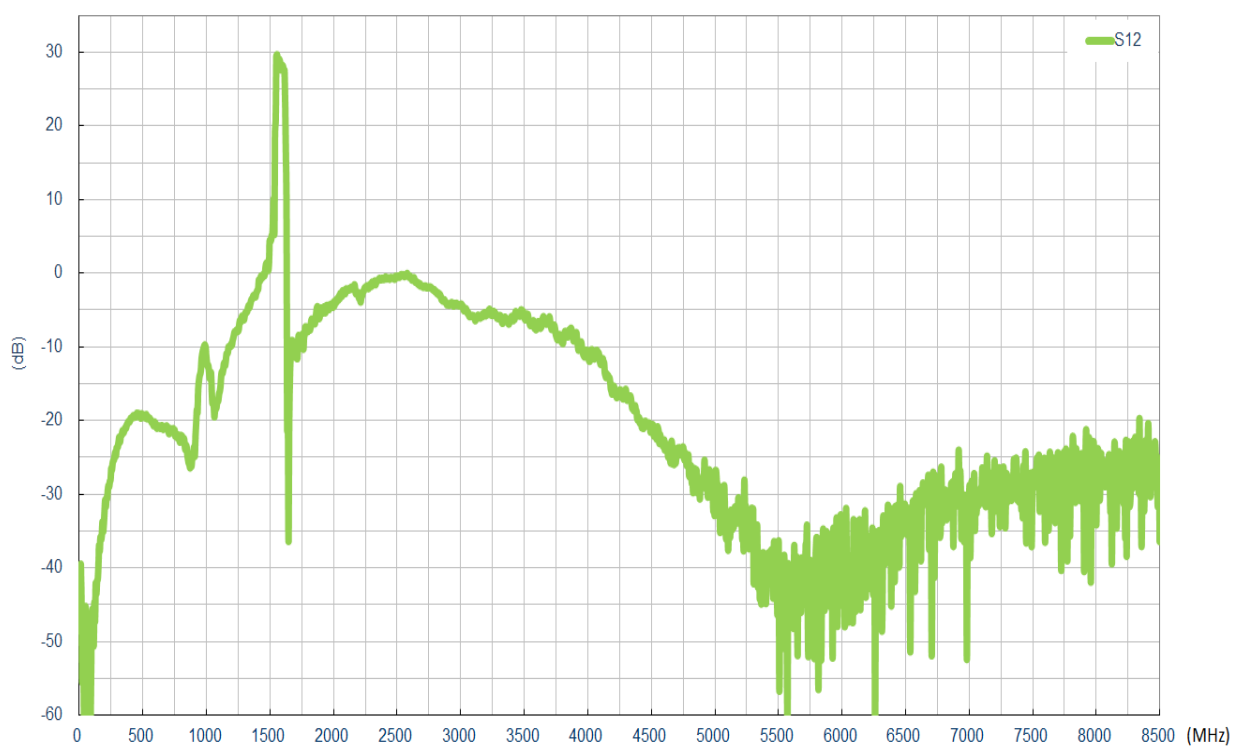

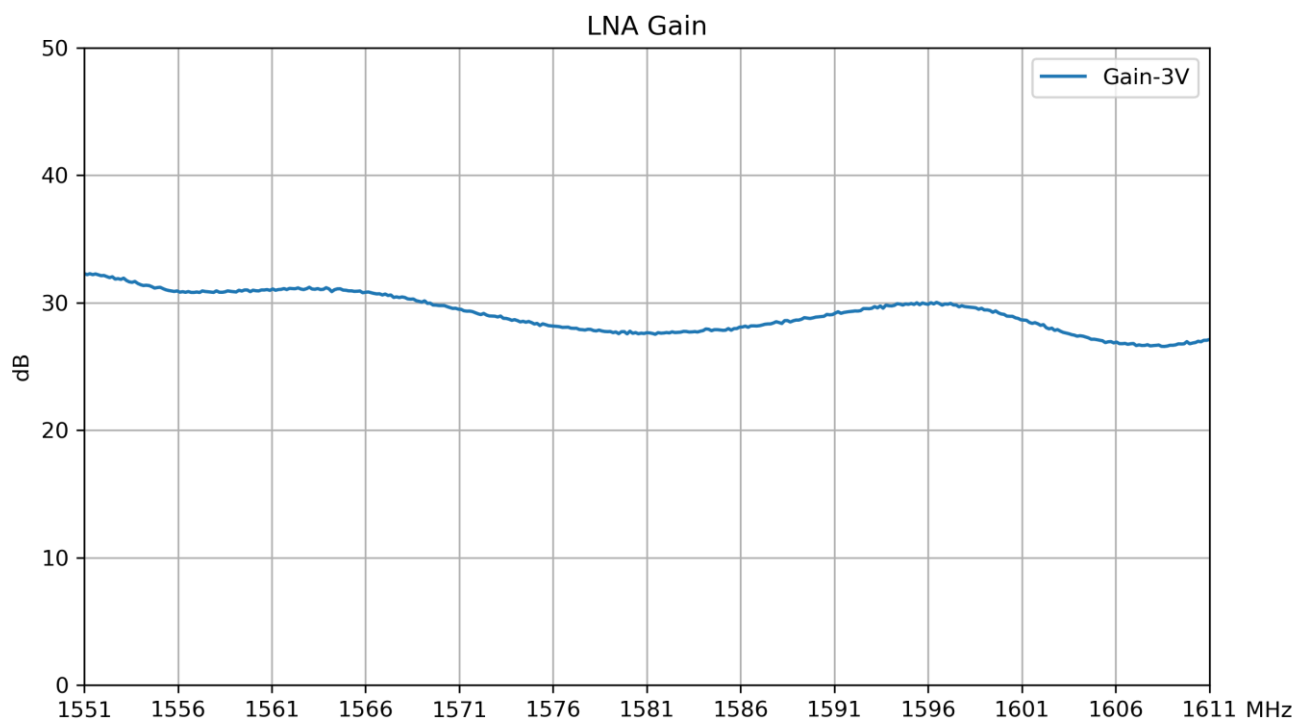


GNSS LNA Noise Figure @ 3.0V

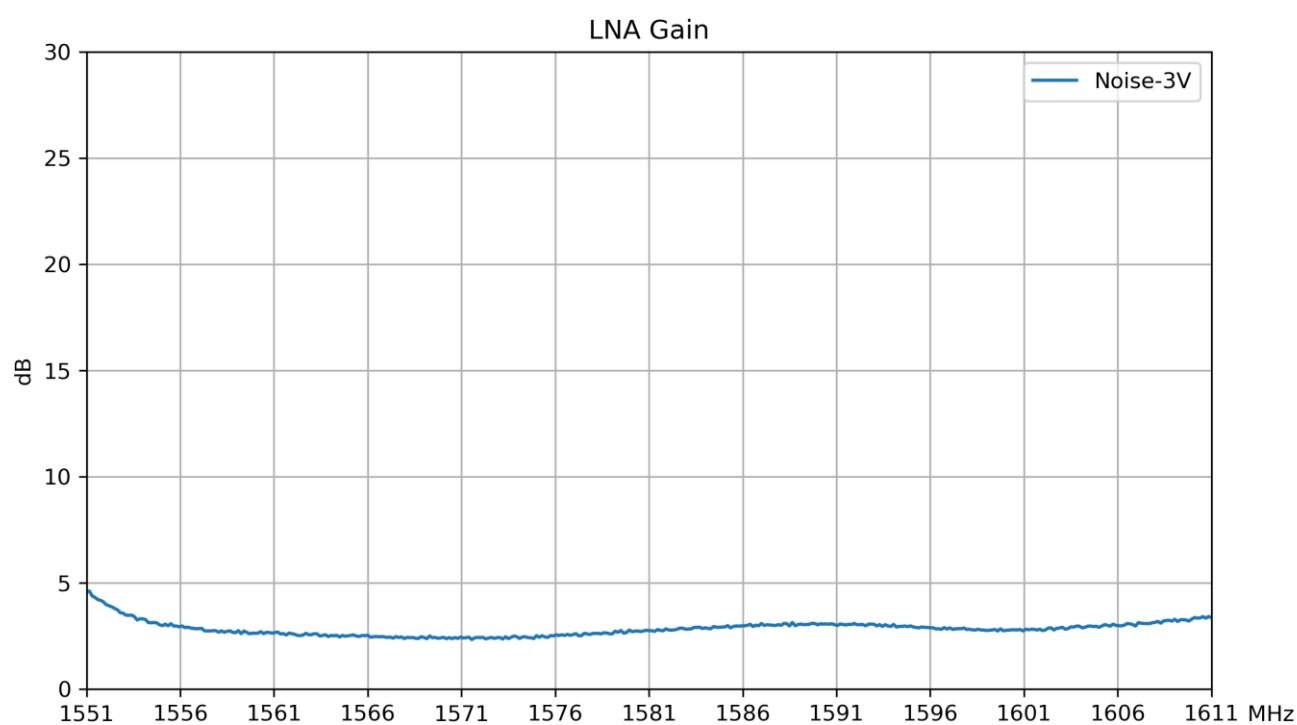


6.3 Active FM Measurements

FM LNA Gain

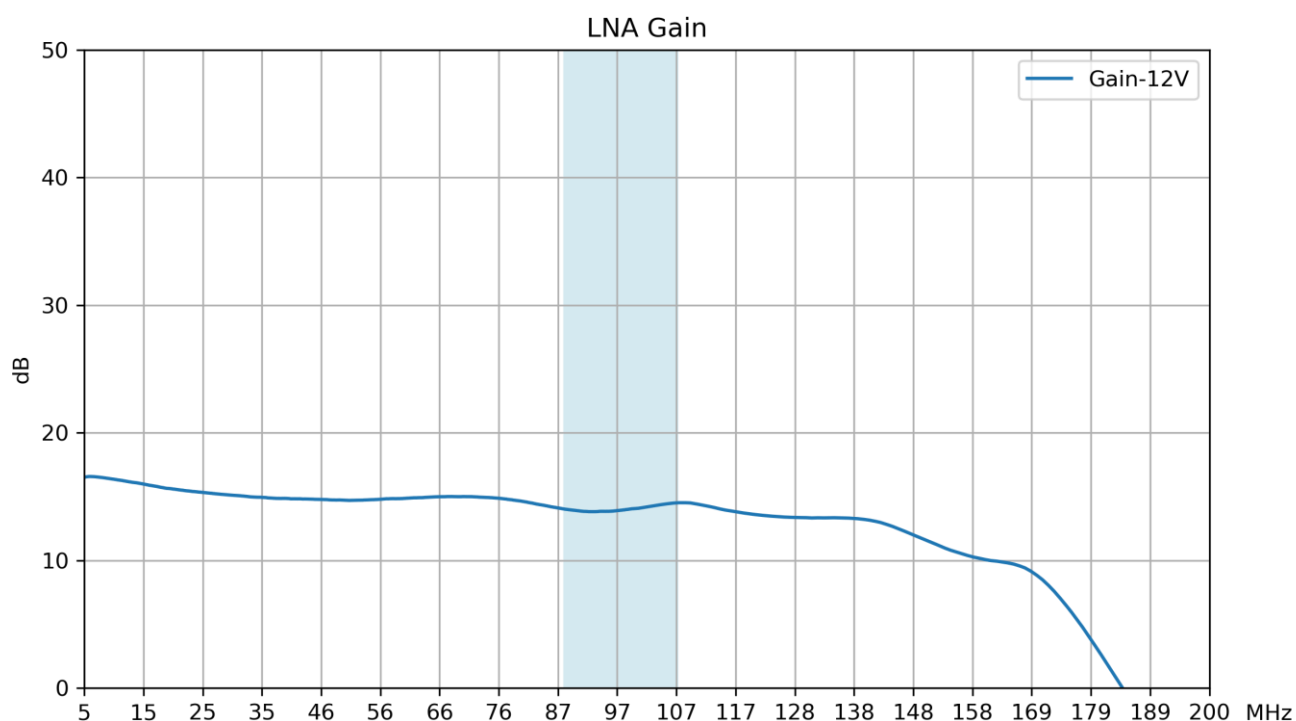


7. Antenna Characteristics


7.1 Test Setup – 30*30cm Ground Plane

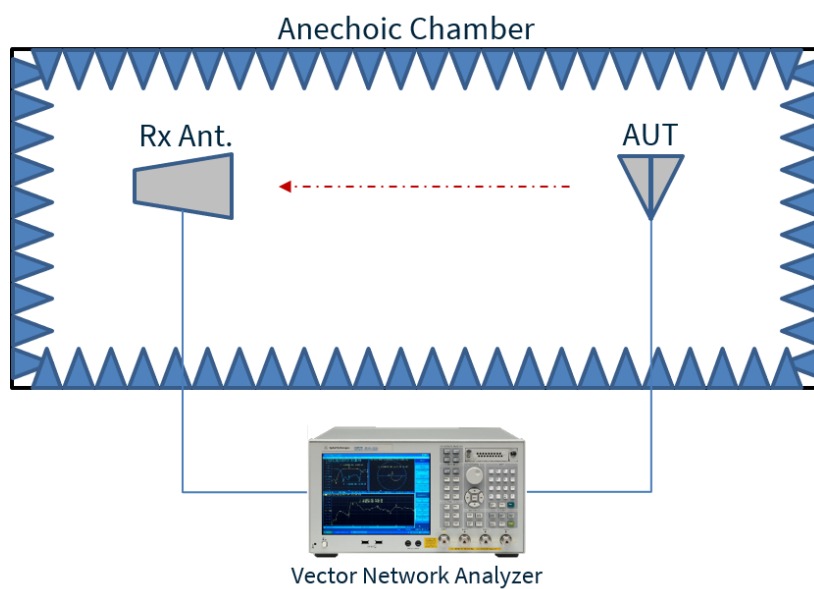


7.2 Return Loss - Cellular

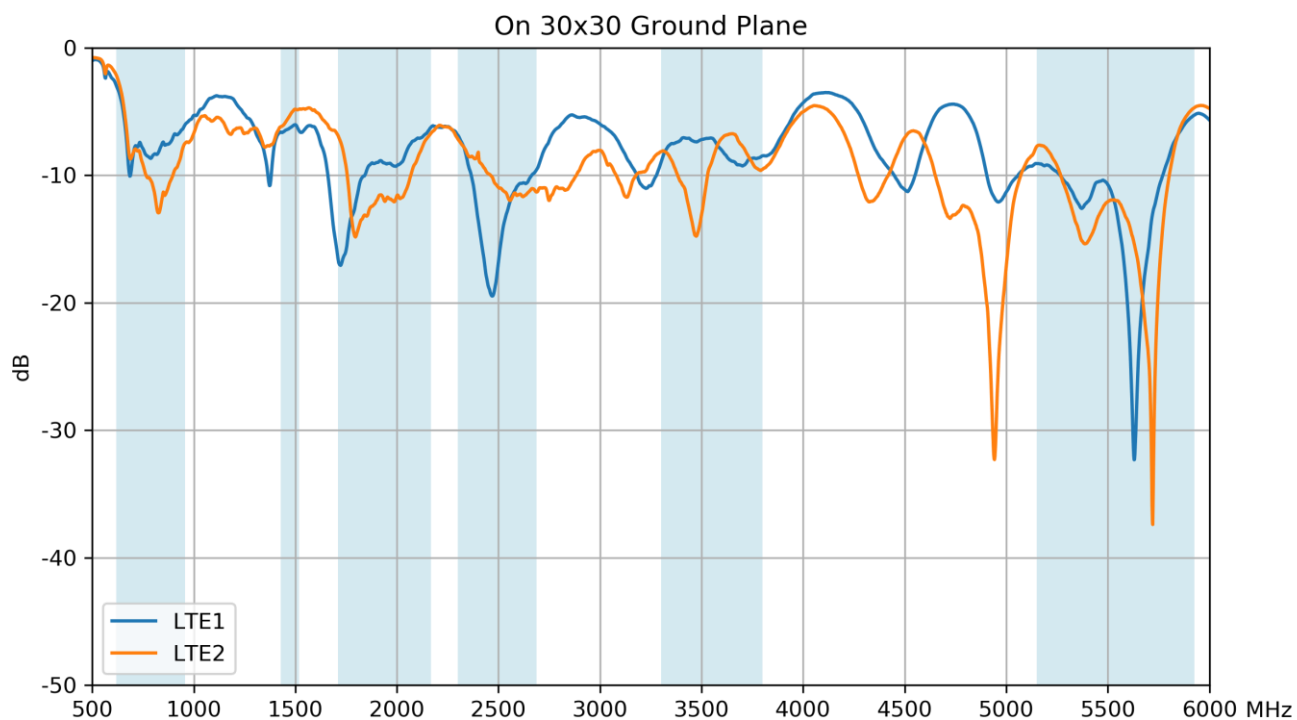


7.3 Return Loss - Wi-Fi

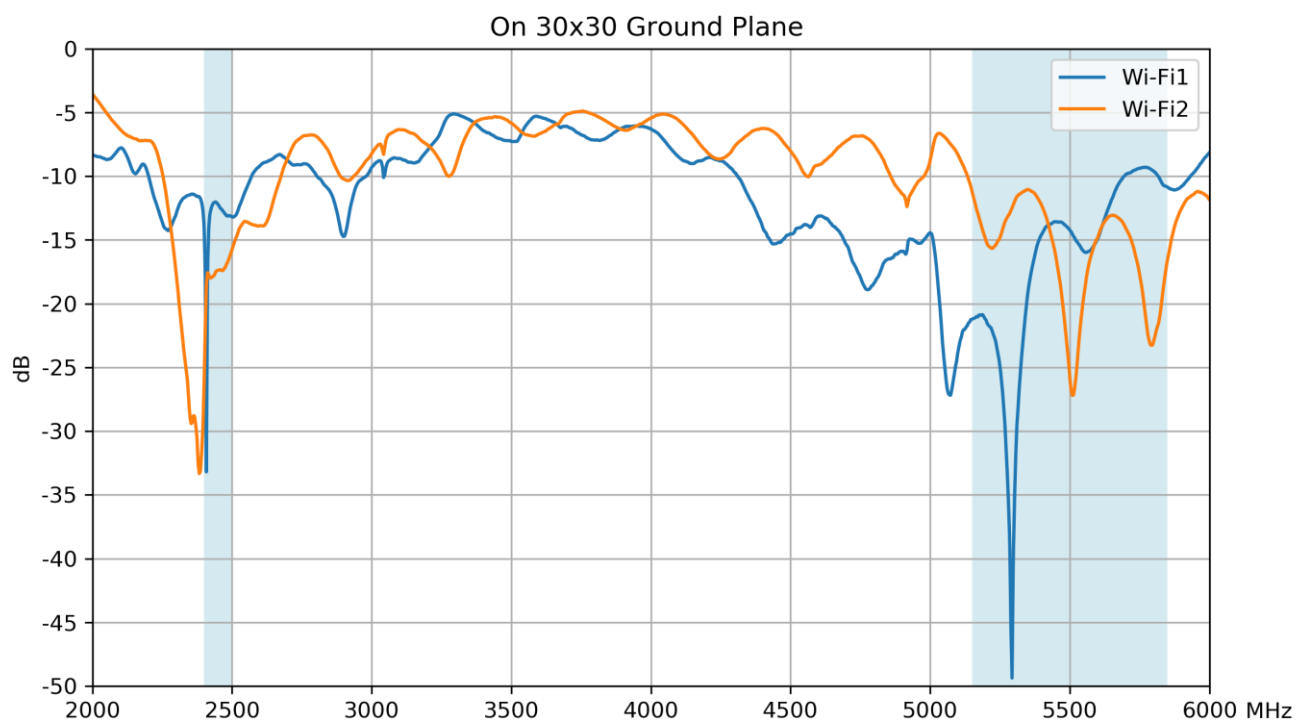


7.4 Return Loss - GNSS

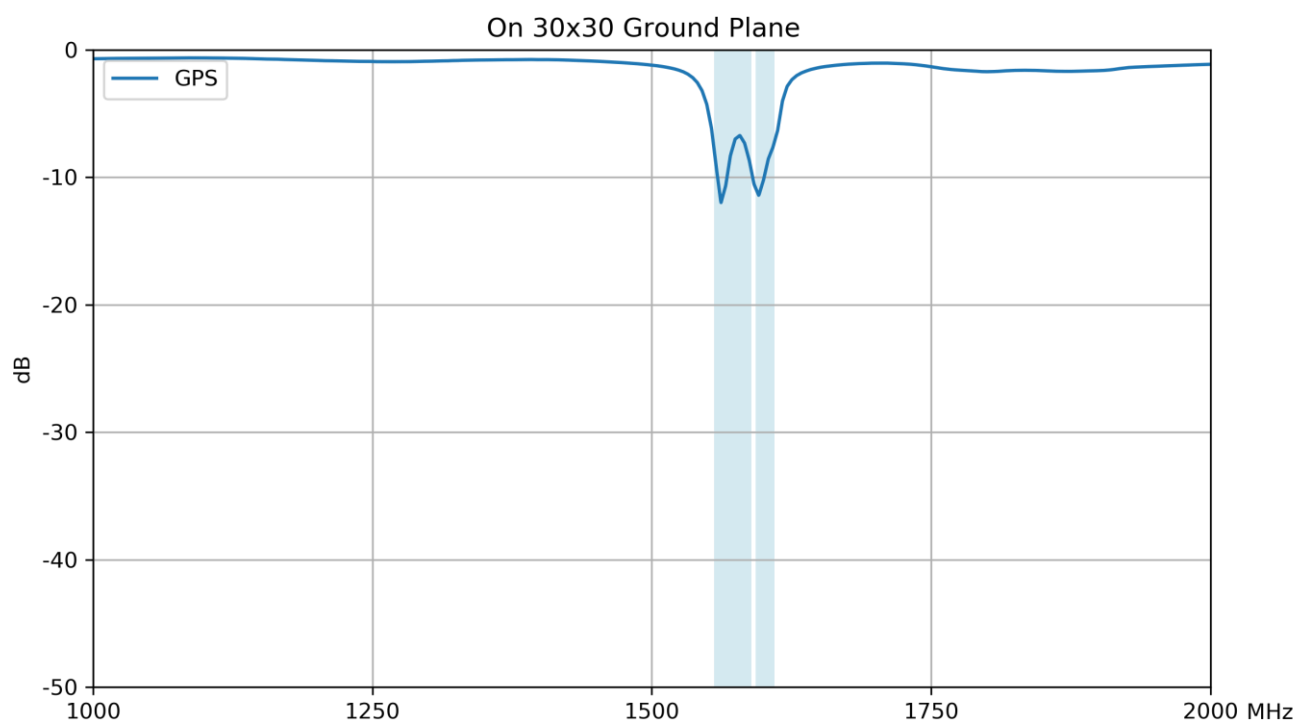


7.5 Return Loss - FM

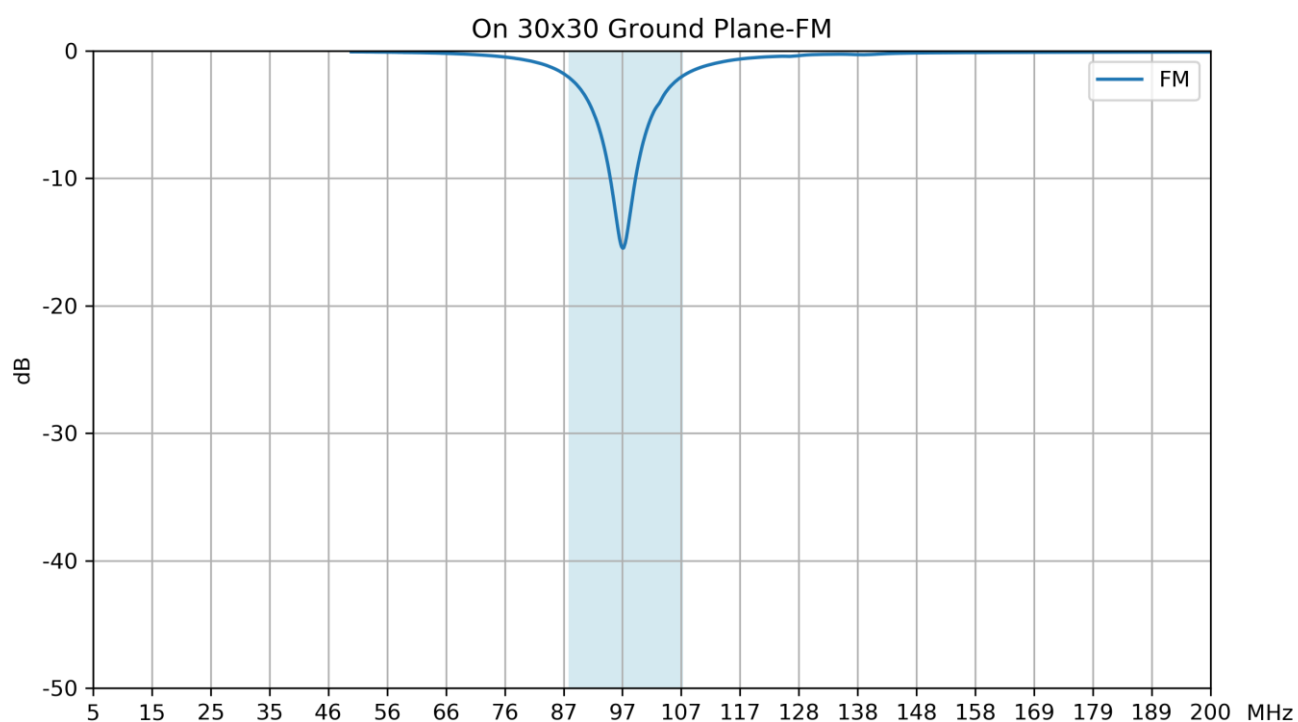


7.6 Return Loss - VHF/UHFLMR (150-900MHz)

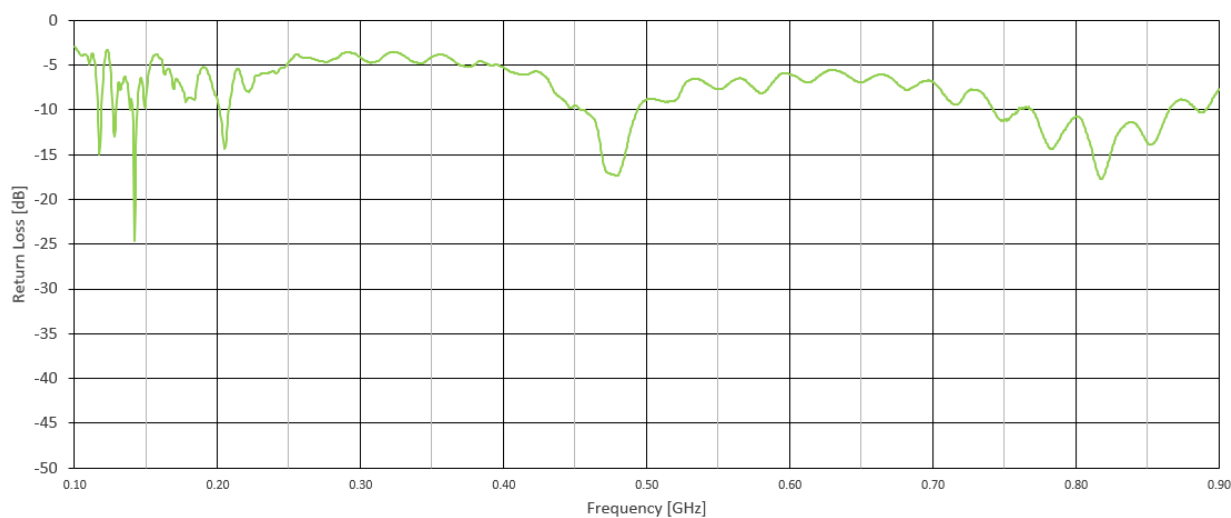


7.7 Return Loss - Isolation

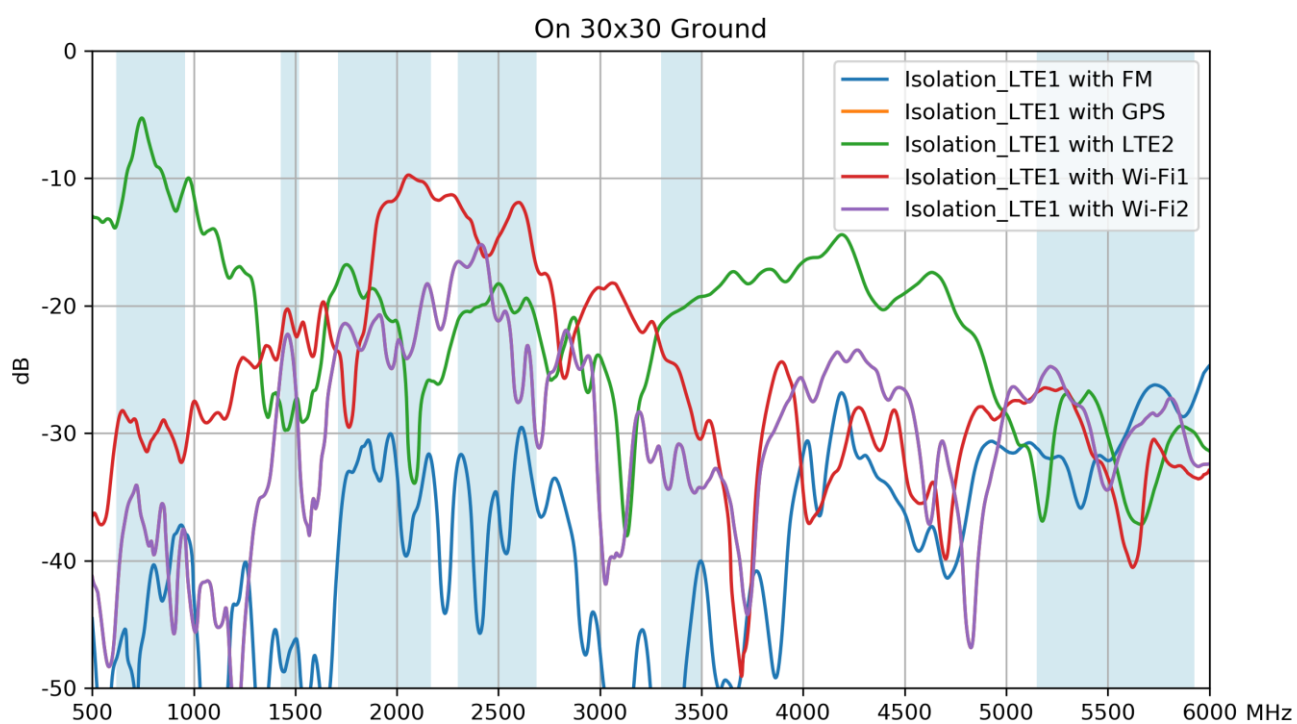


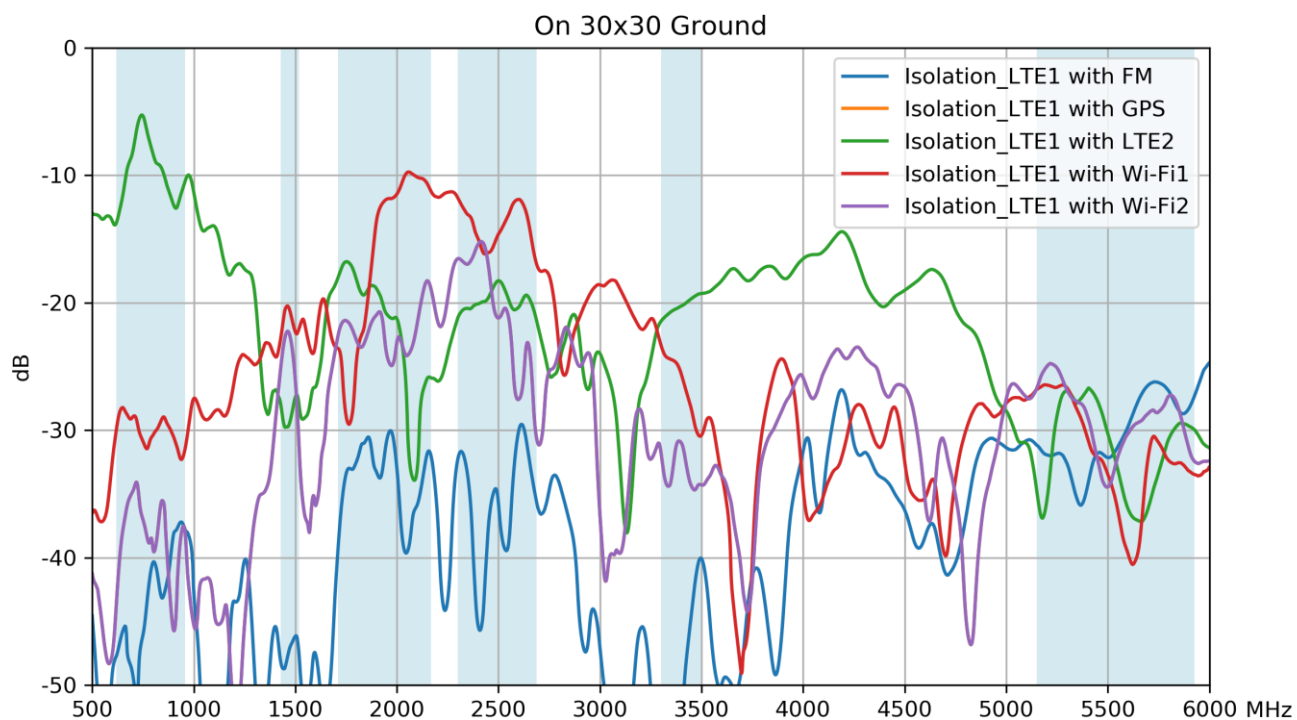


7.8 Efficiency - GNSS

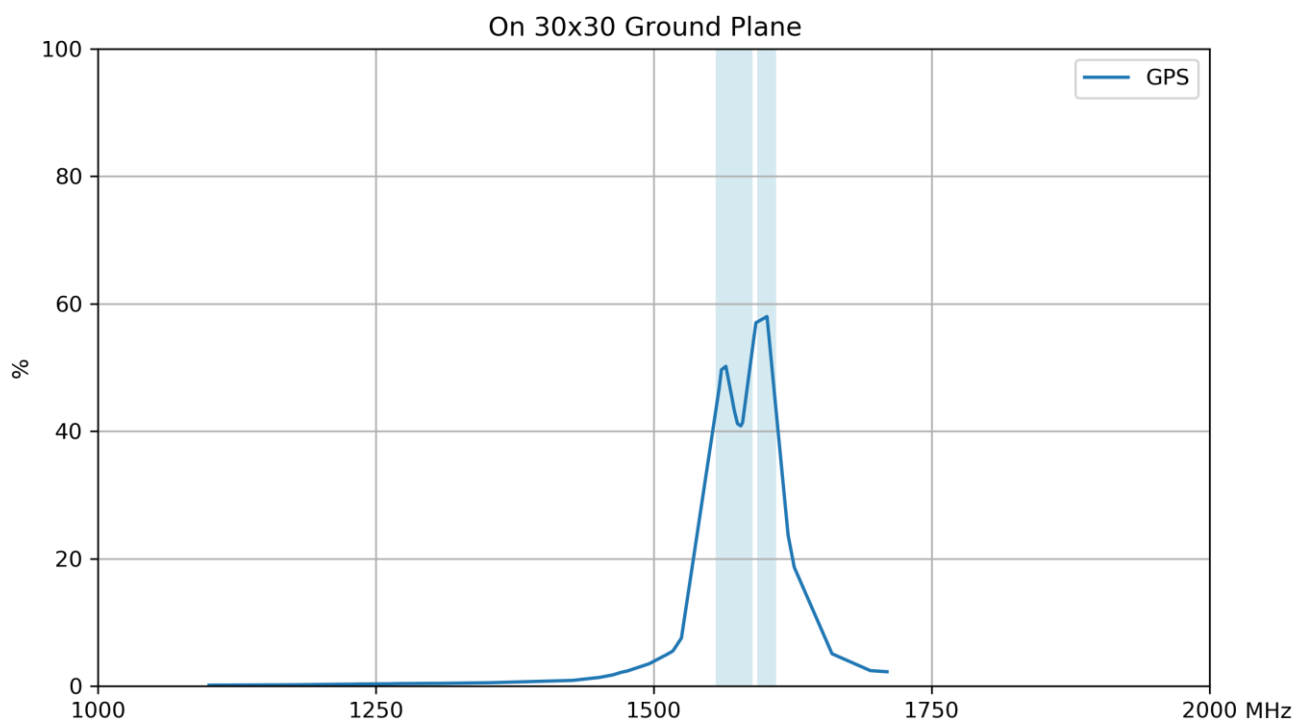


7.9 Efficiency - Cellular

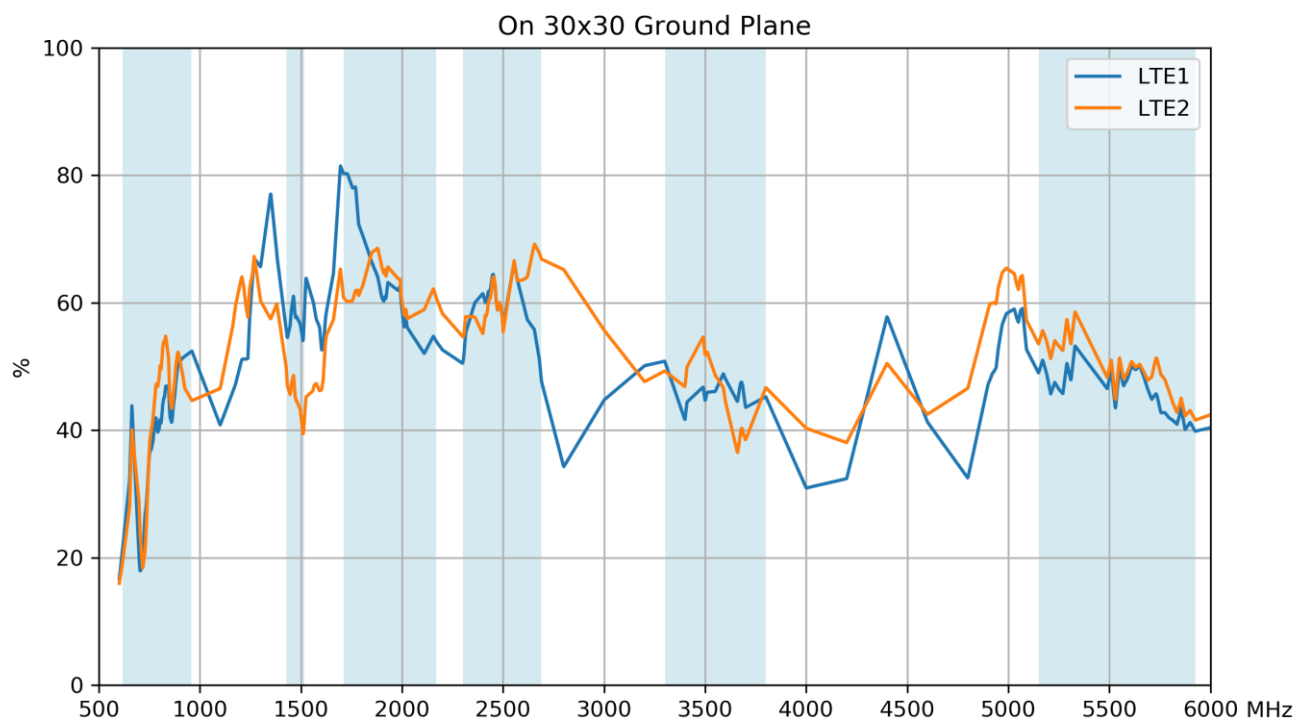


7.10 Efficiency - Wi-Fi

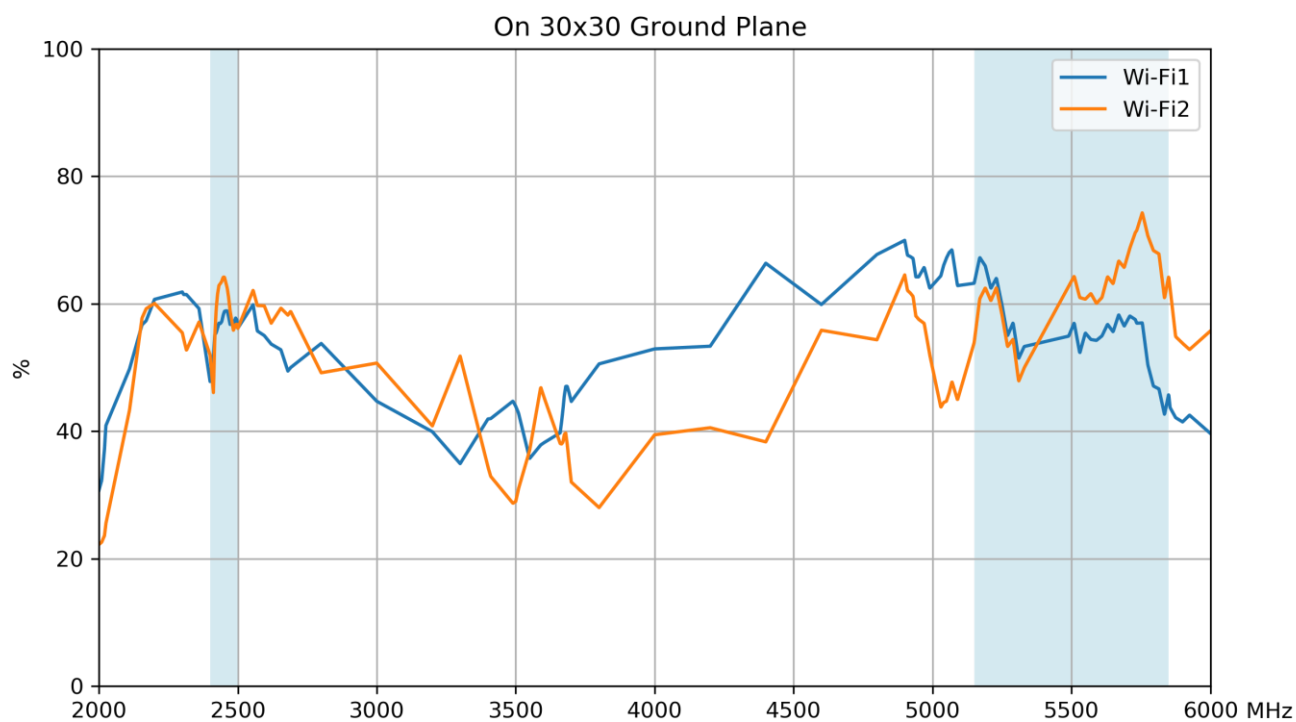


7.11 Average Gain - GNSS

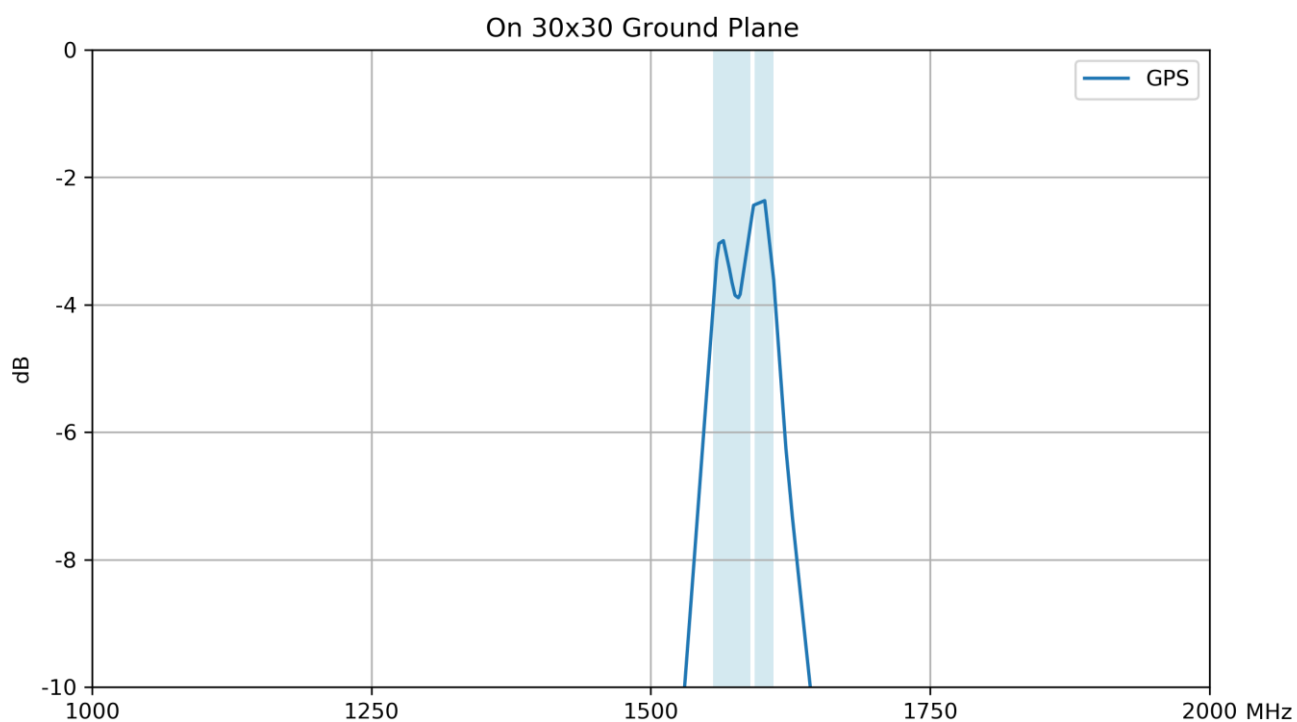


7.12 Average Gain - Cellular

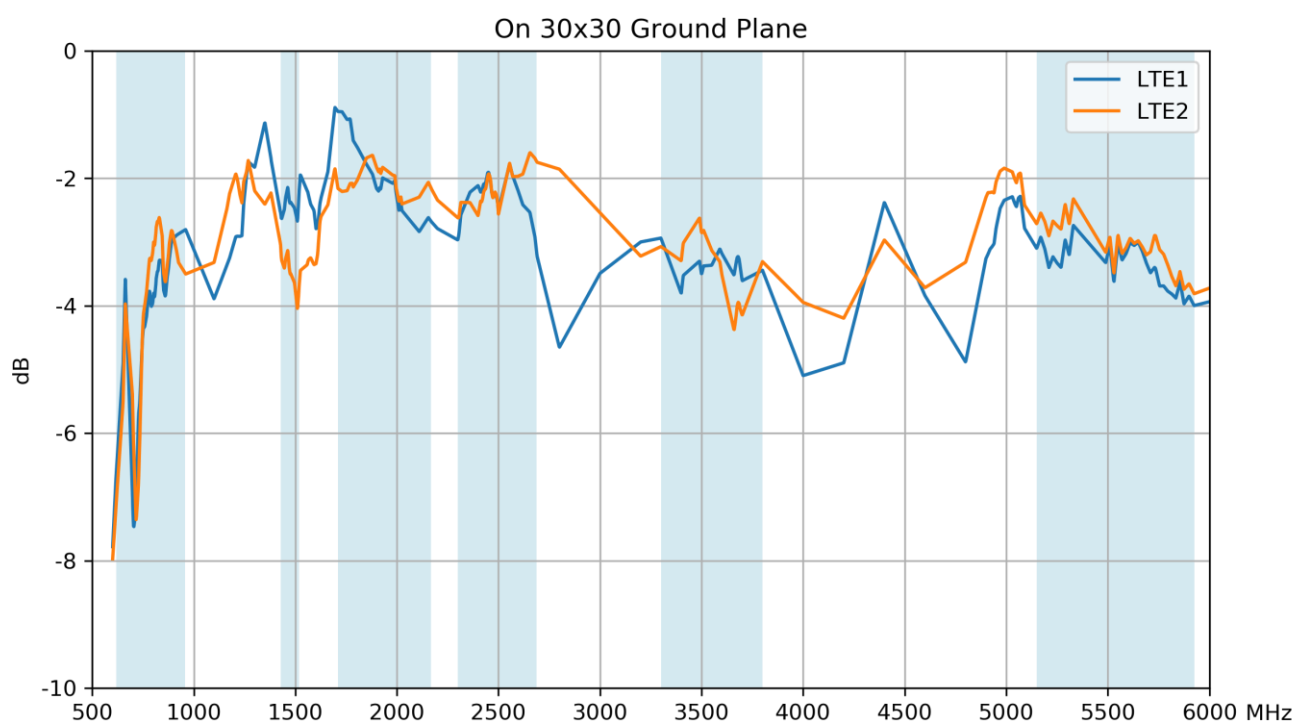


7.13 Average Gain – Wi-Fi

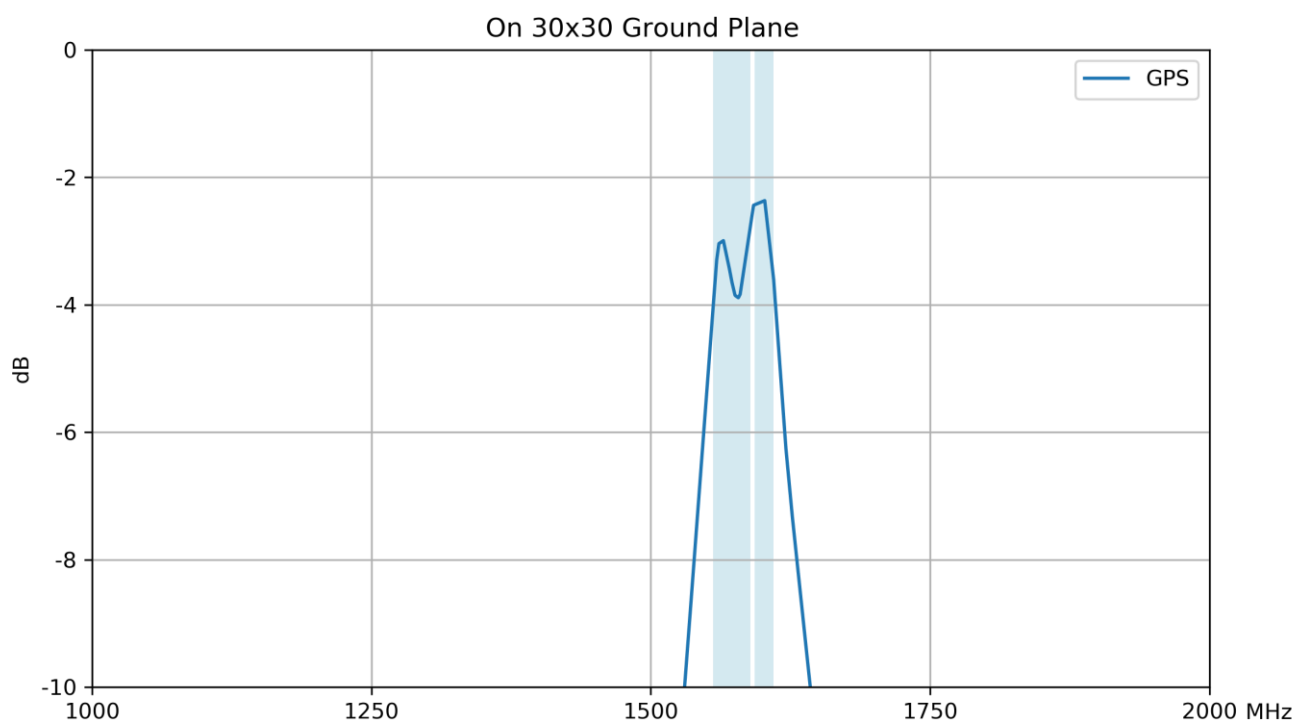


7.14 Peak Gain – GNSS

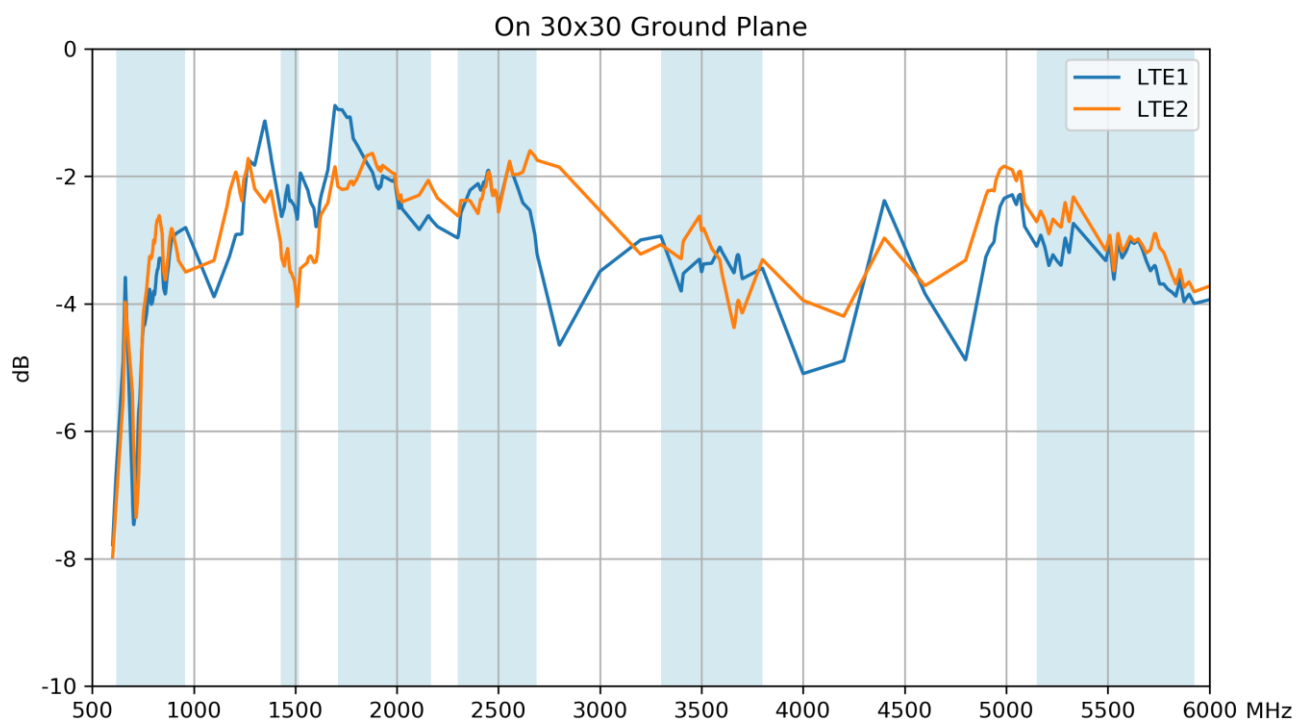

7.15 Peak Gain - Cellular

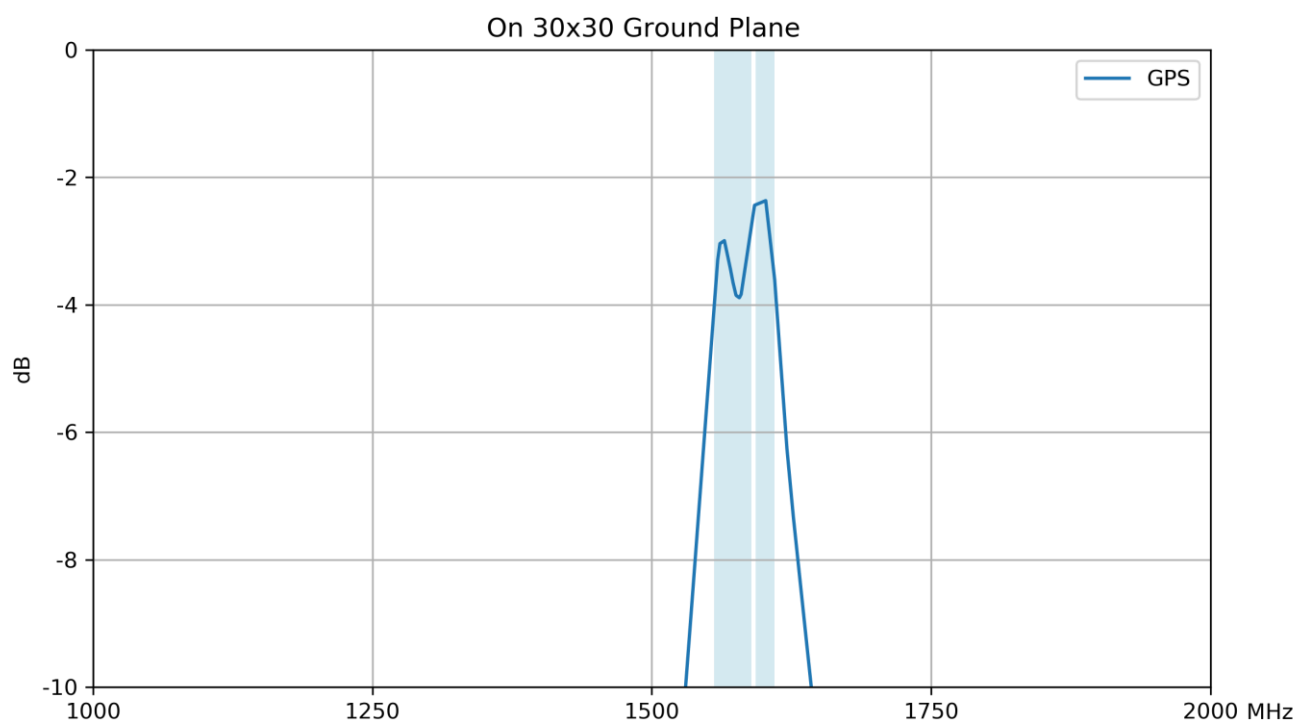


7.16 Peak Gain – Wi-Fi

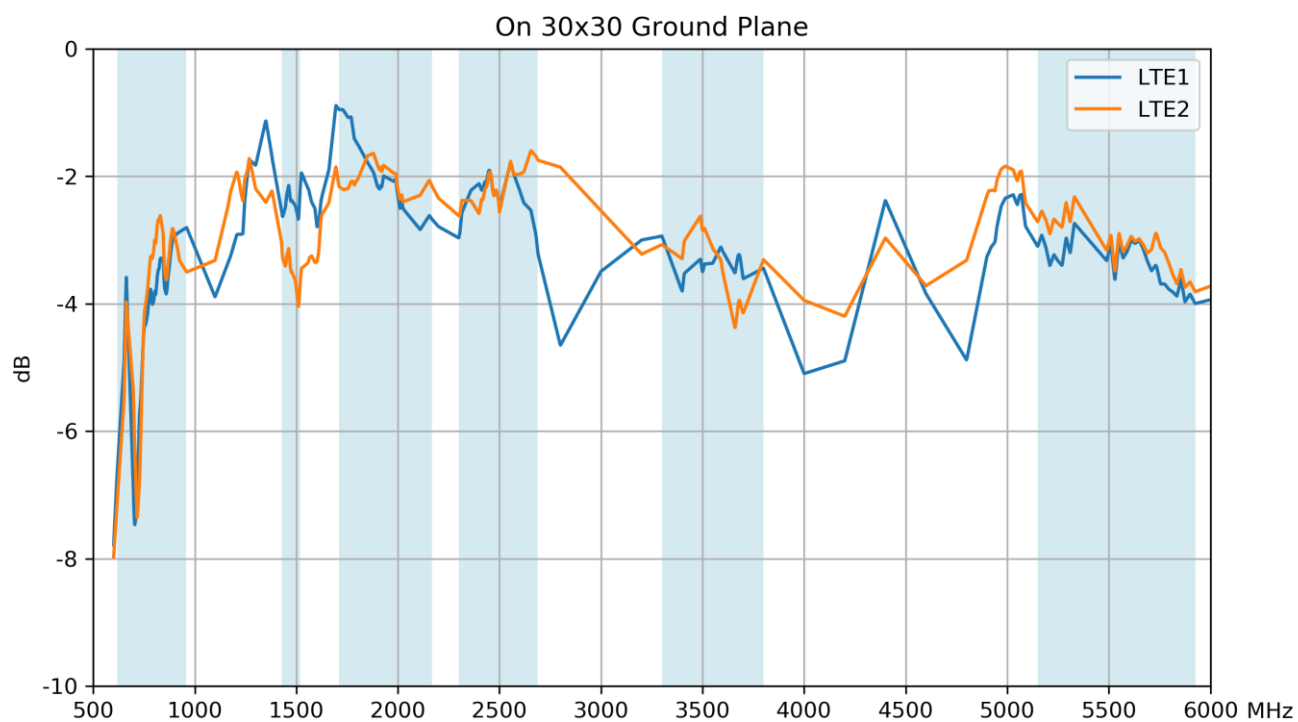


8. Radiation Patterns

8.1 Test Setup - 30*30cm Ground Plane

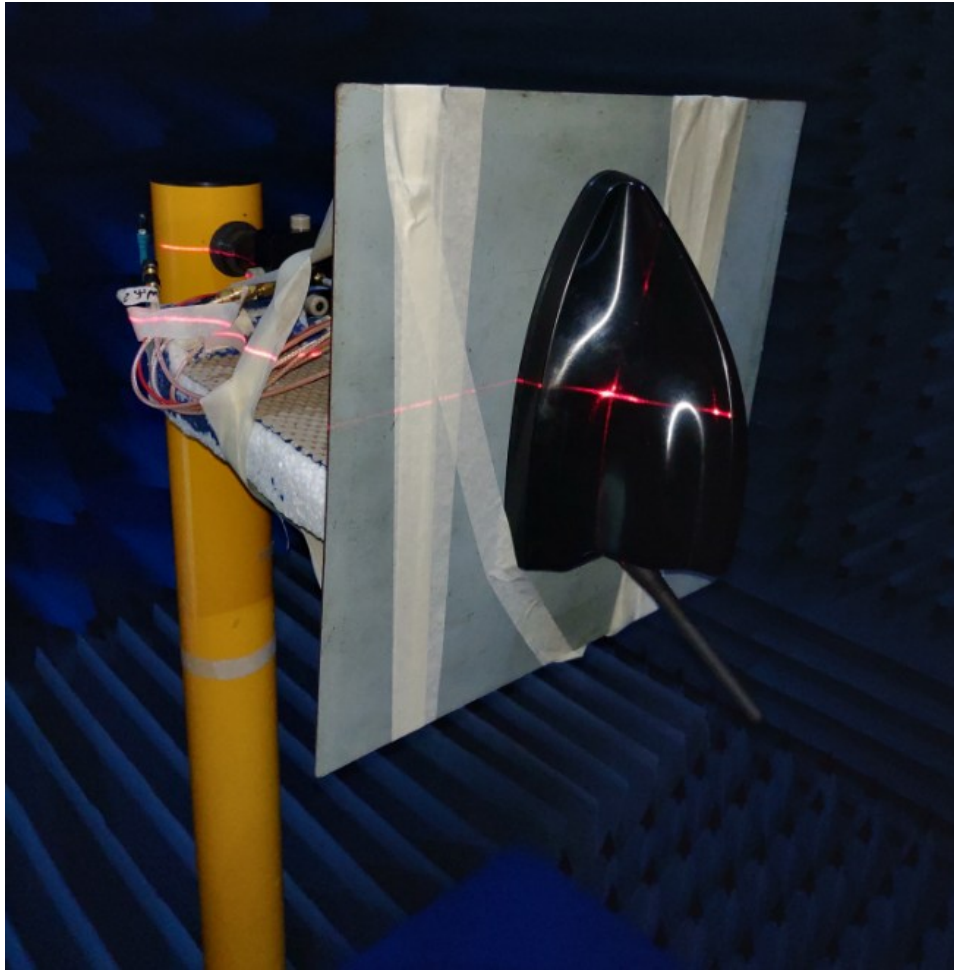


8.2 GNSS 2D & 3D Radiation Patterns


1575MHz

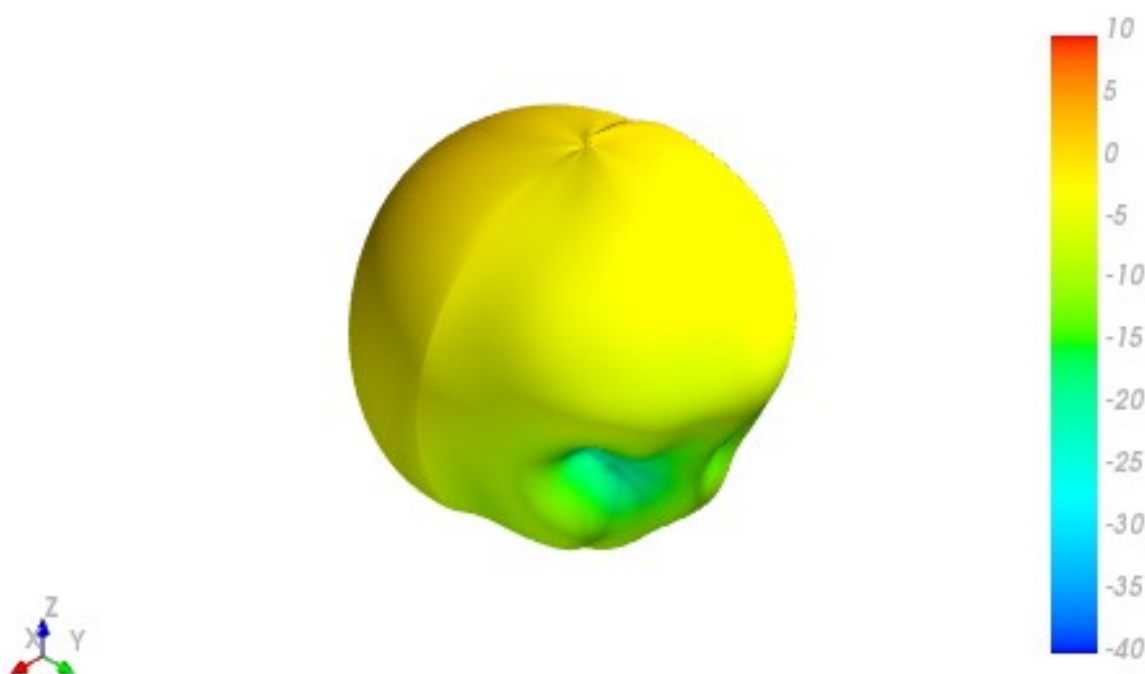


XY Plane

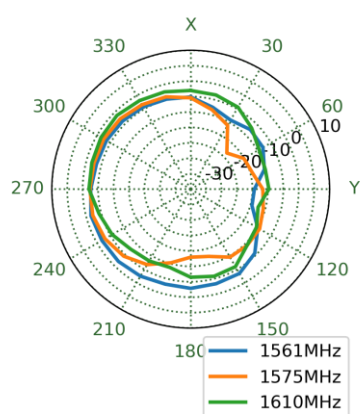

XZ Plane

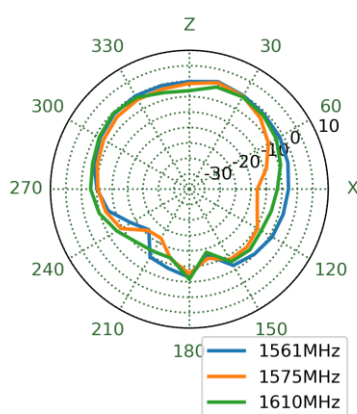

YZ Plane

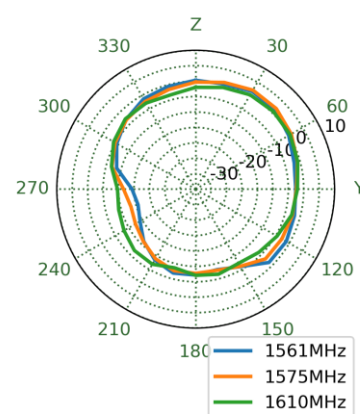


8.3 Cellular MIMO 1 2D & 3D Radiation Patterns


758MHz




XY Plane

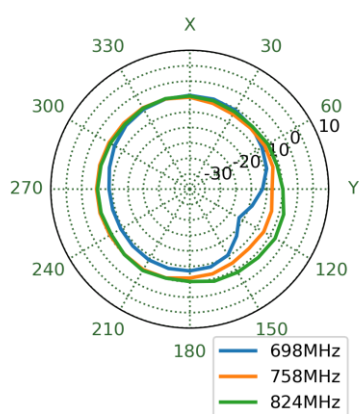


XZ Plane

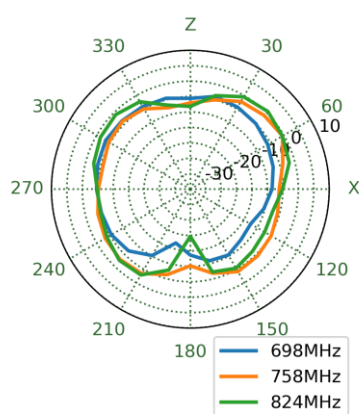


YZ Plane

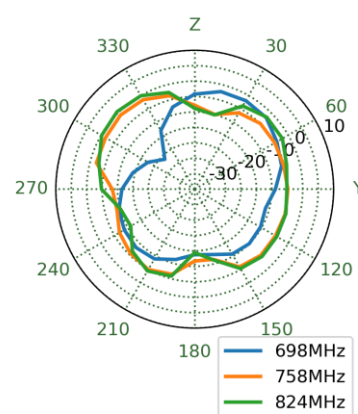


890MHz

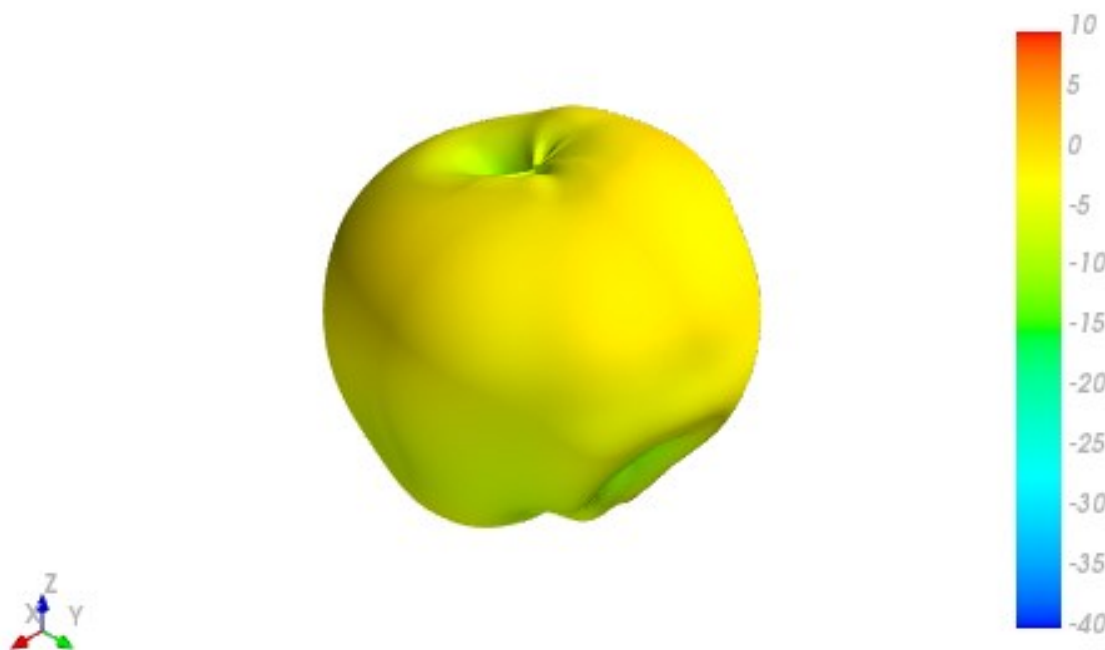


XY Plane

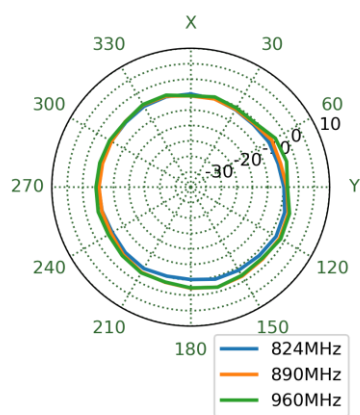


XZ Plane

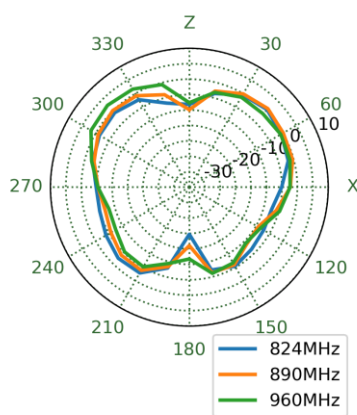


YZ Plane

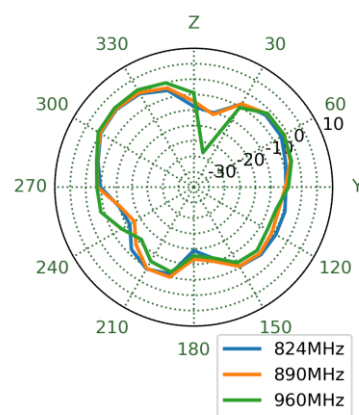


1805MHz

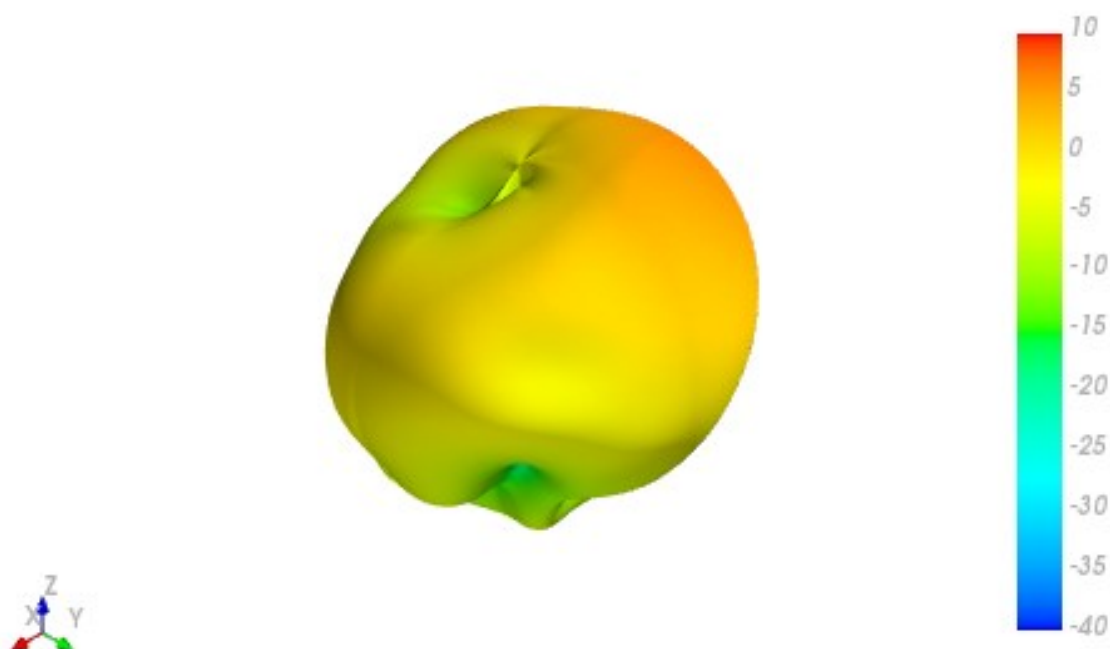


XY Plane

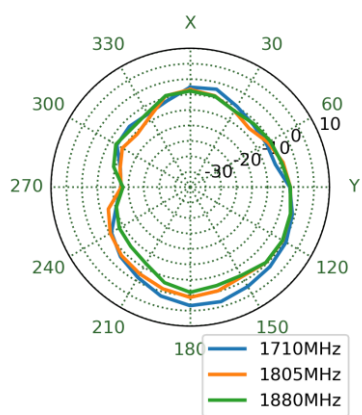


XZ Plane

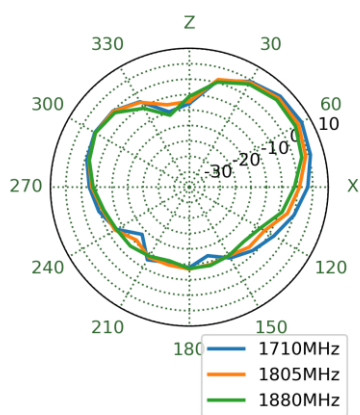


YZ Plane

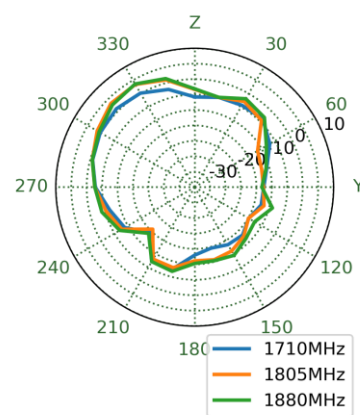


1920MHz

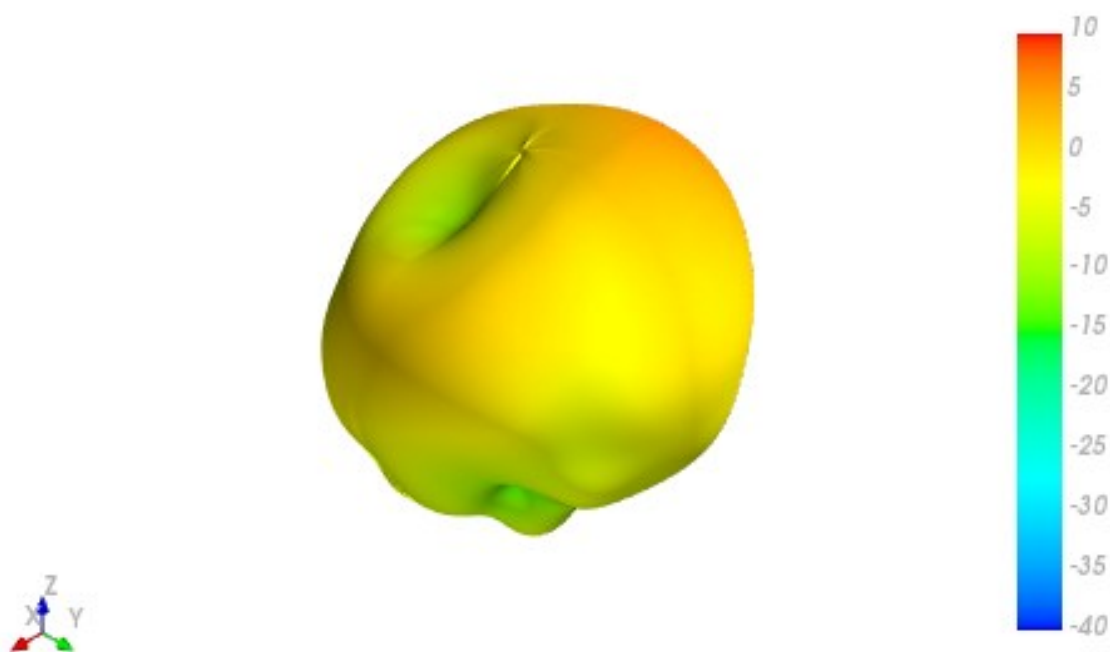


XY Plane

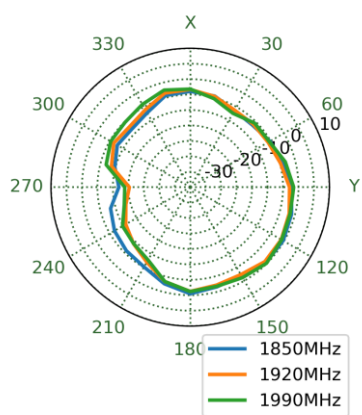


XZ Plane

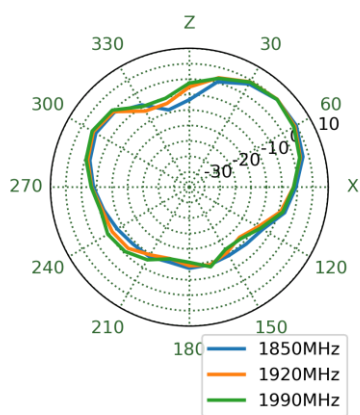


YZ Plane

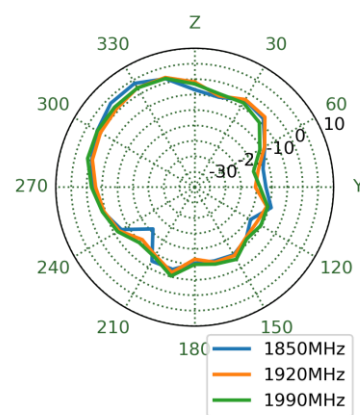


1990MHz

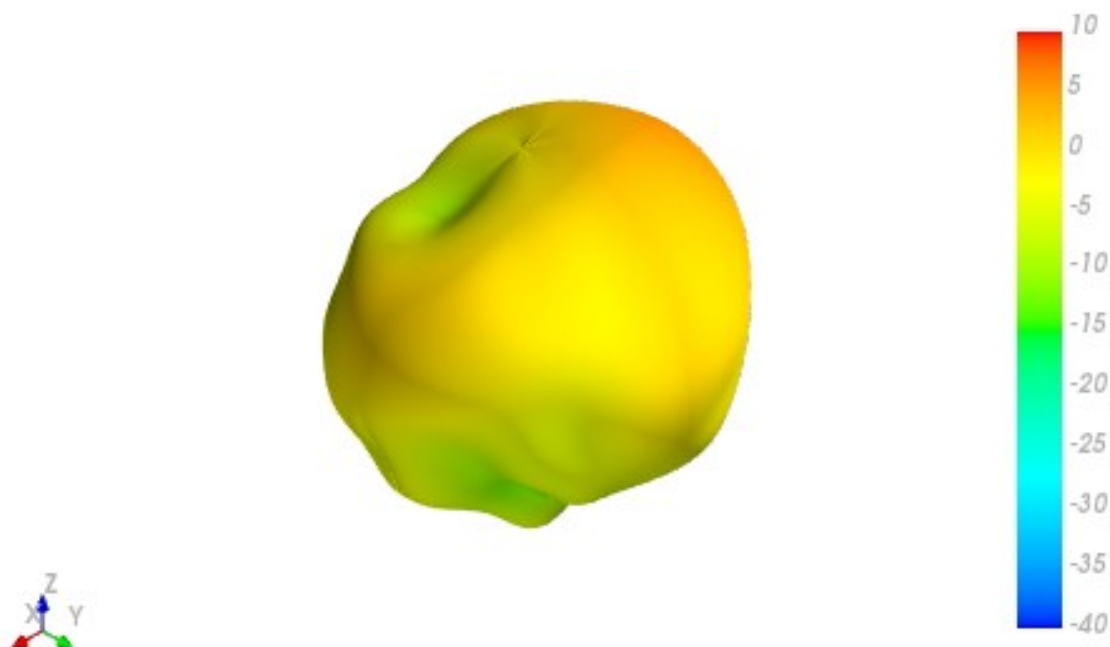


XY Plane

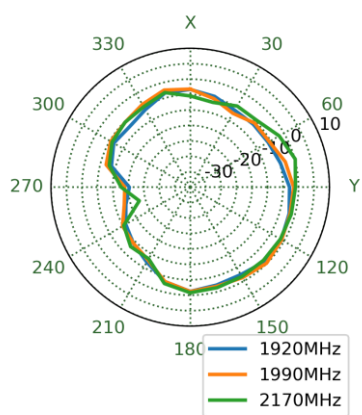


XZ Plane

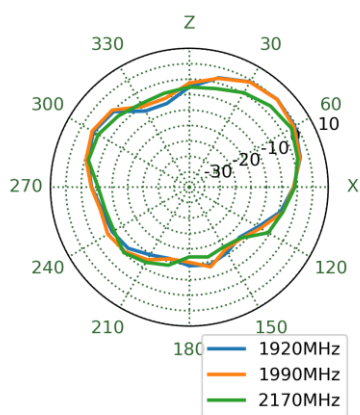


YZ Plane

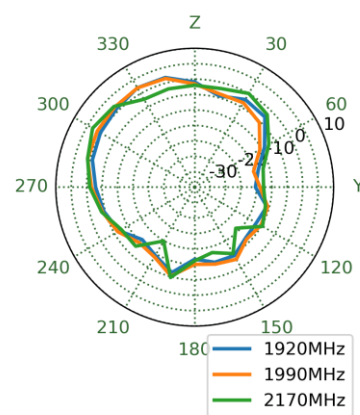


2500MHz

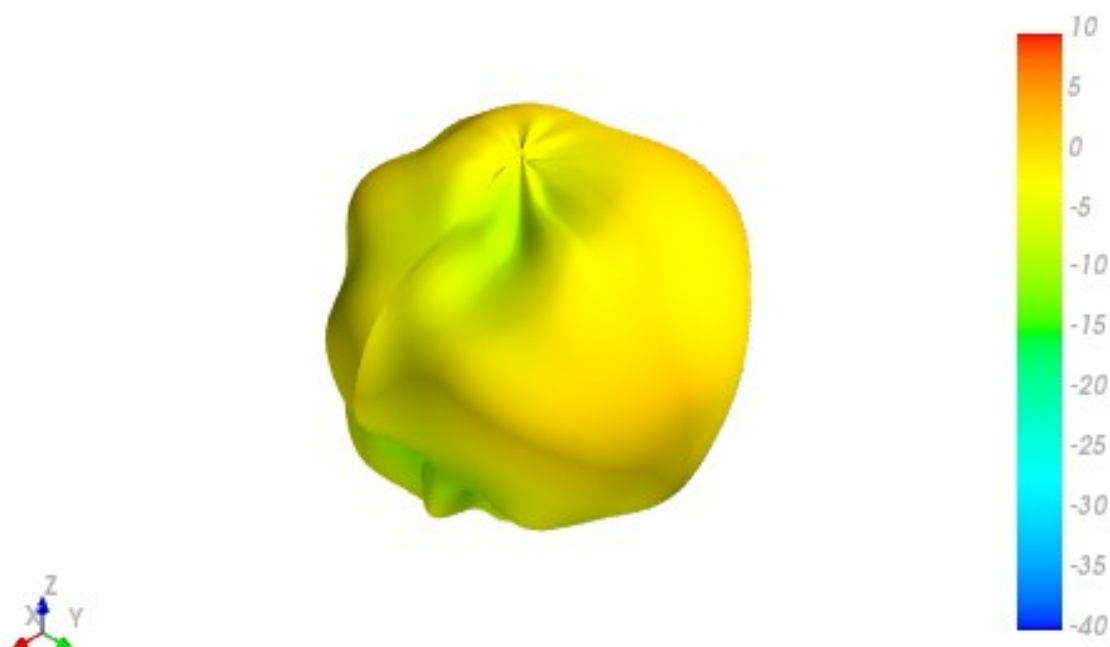


XY Plane

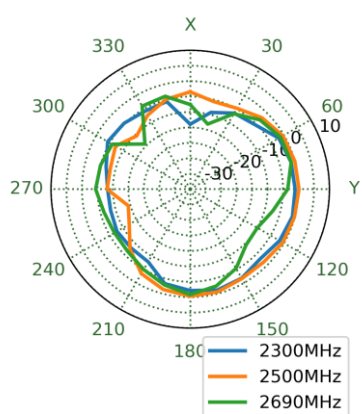

XZ Plane

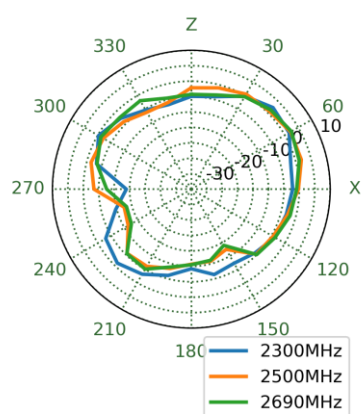


YZ Plane

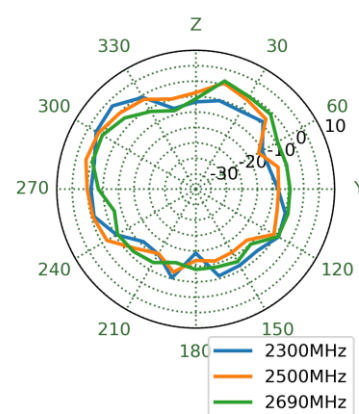


8.4 Cellular MIMO 2D & 3D Radiation Patterns


758MHz

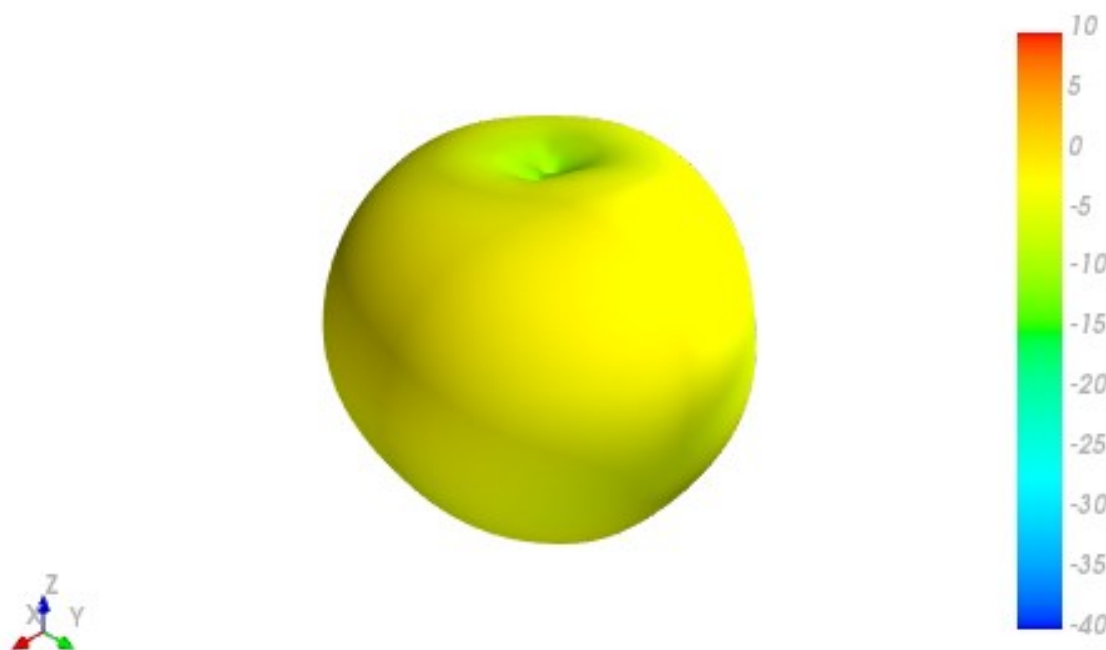


XY Plane

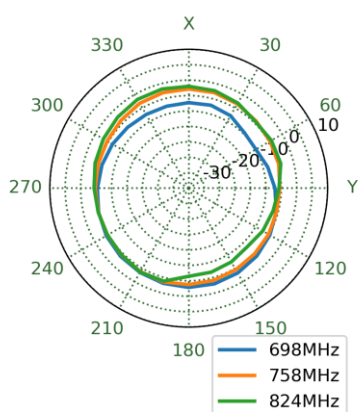


XZ Plane

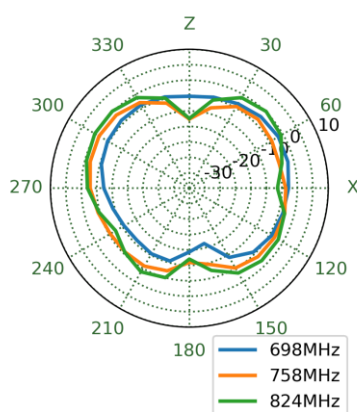


YZ Plane

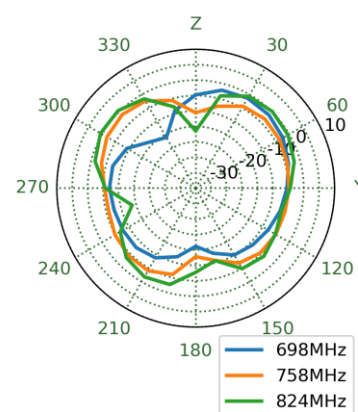


880MHz

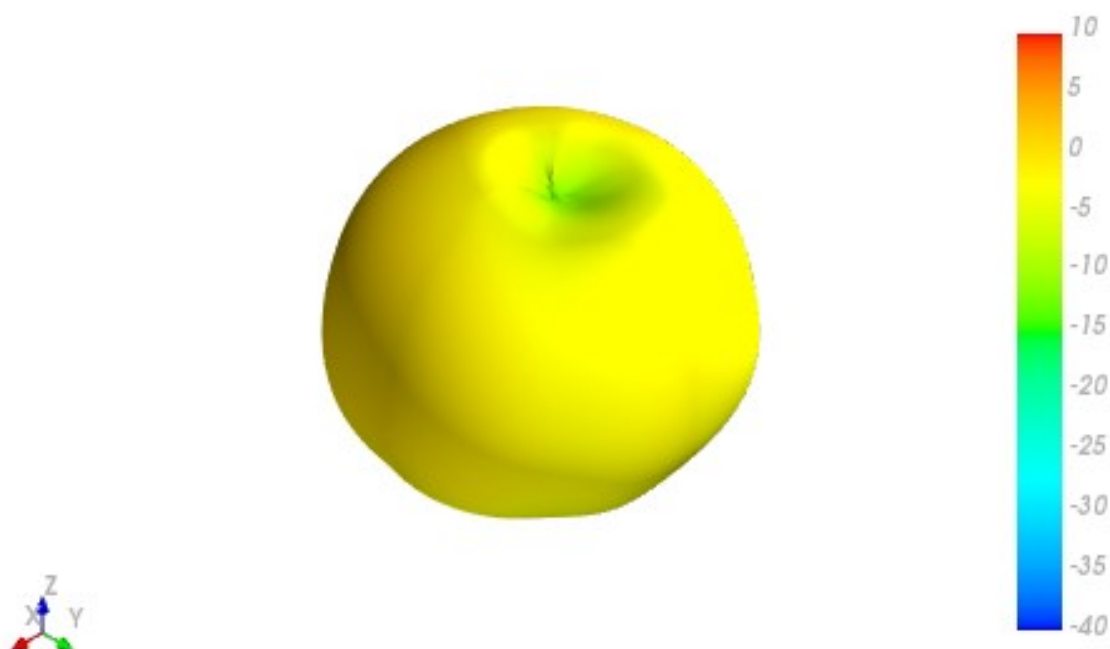


XY Plane

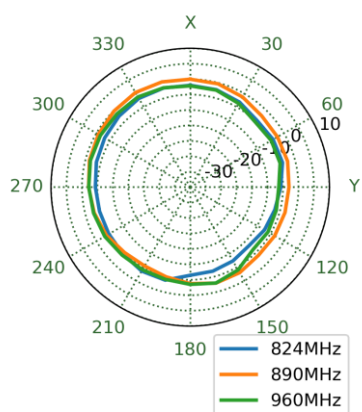


XZ Plane

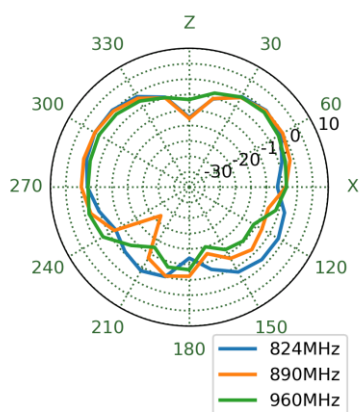


YZ Plane

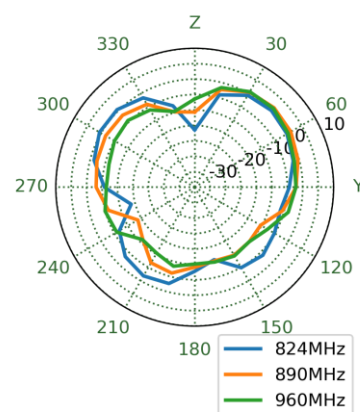


1805MHz

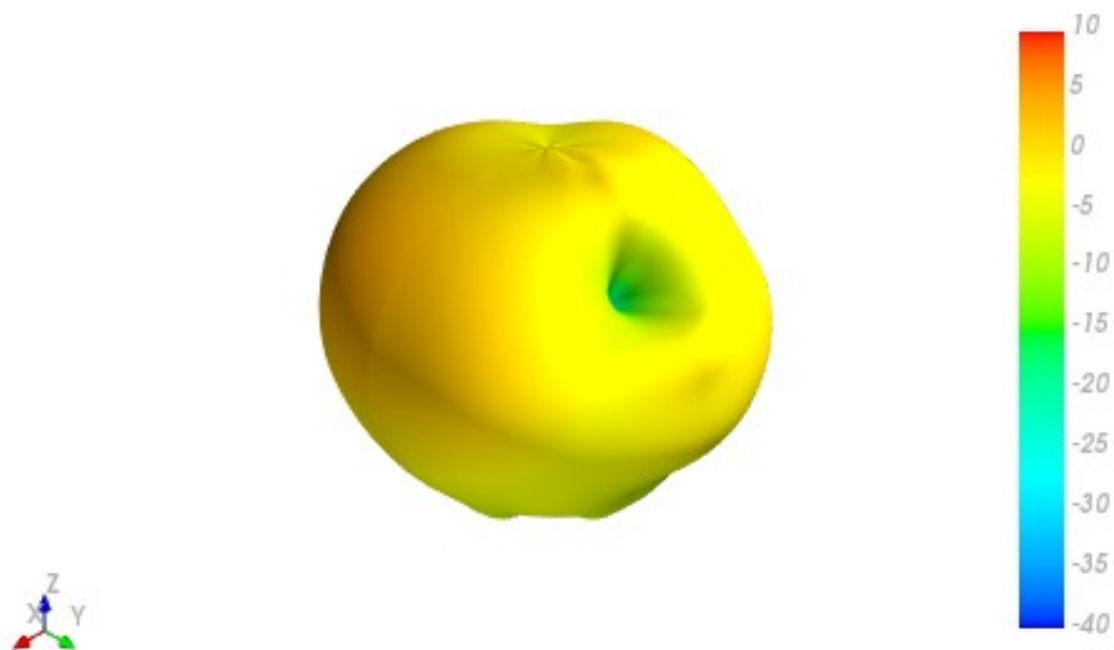


XY Plane

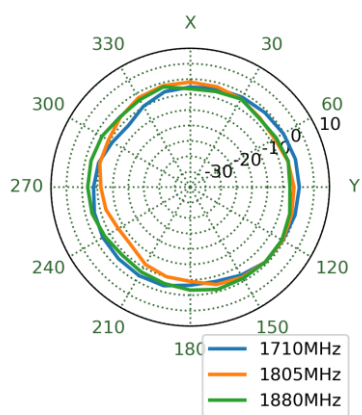


XZ Plane

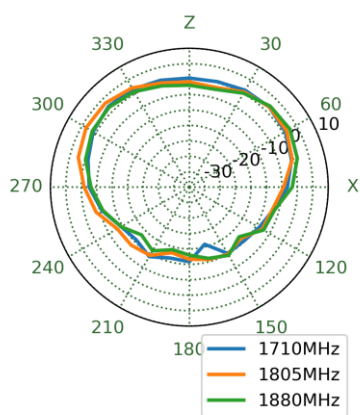


YZ Plane

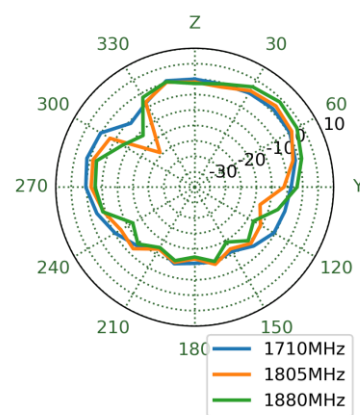


1920MHz

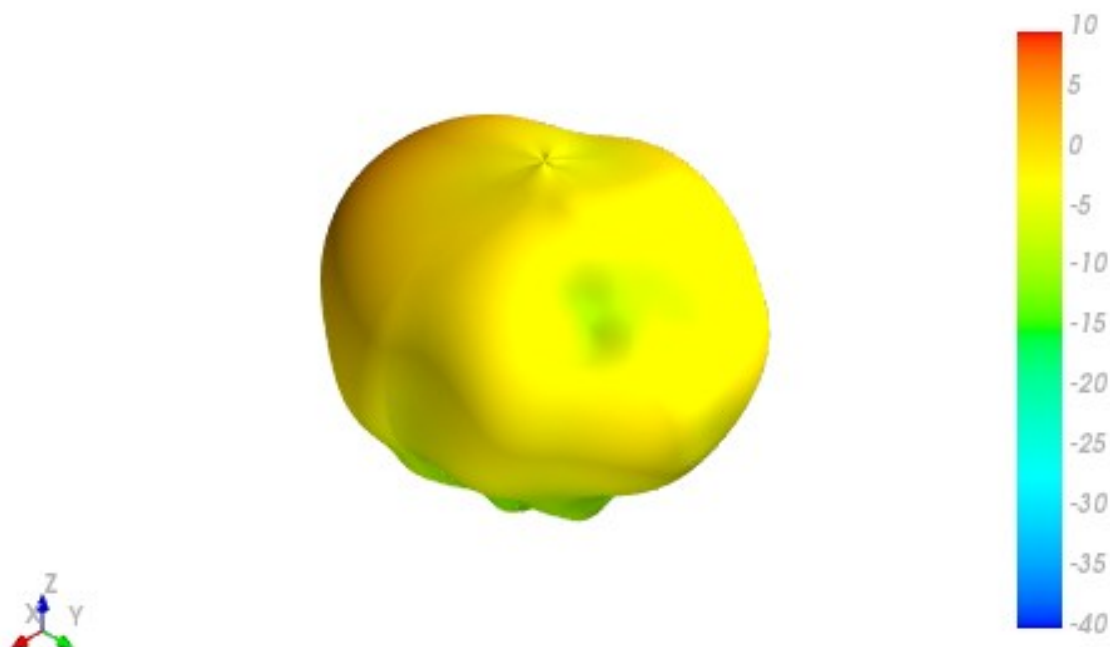


XY Plane

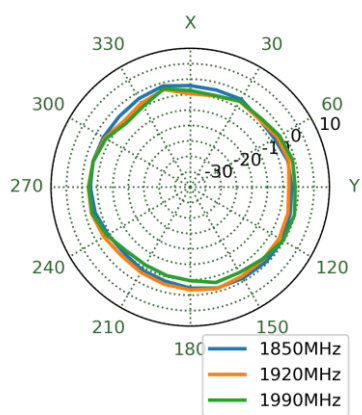


XZ Plane

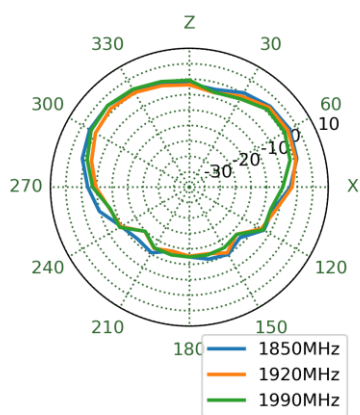


YZ Plane

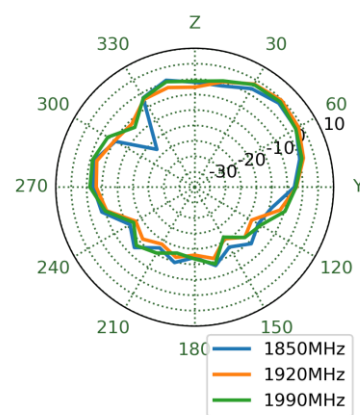


1990MHz

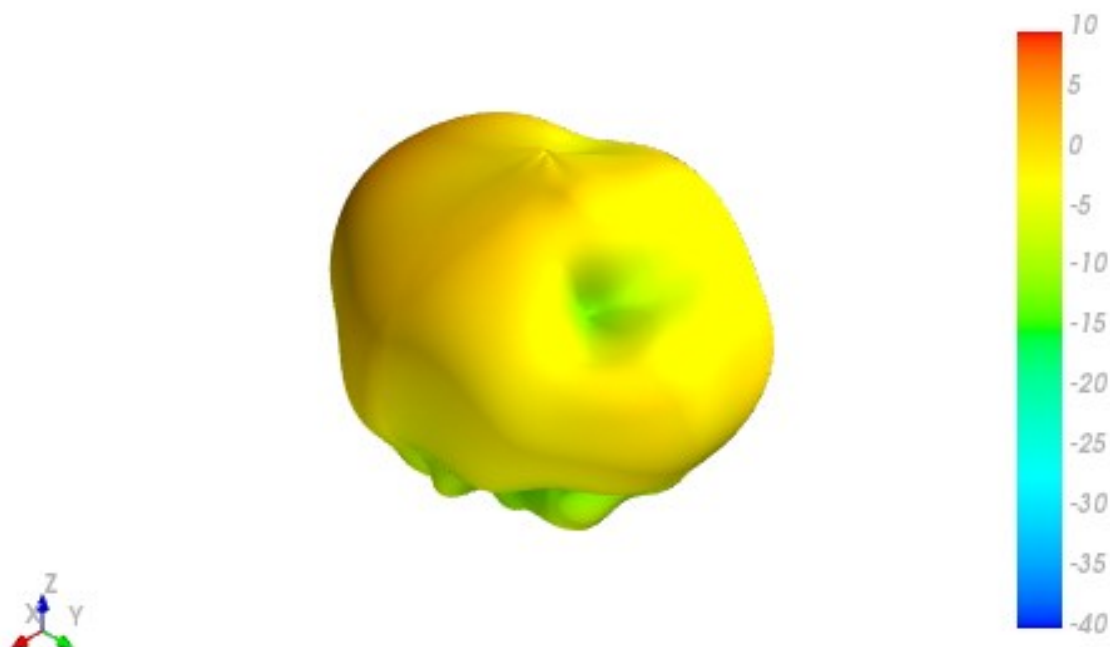


XY Plane

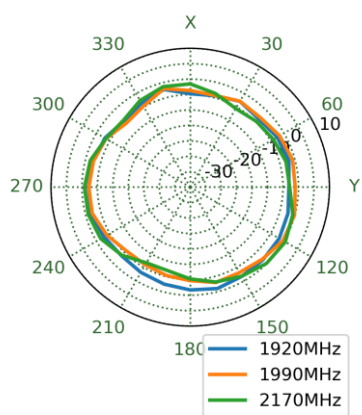


XZ Plane

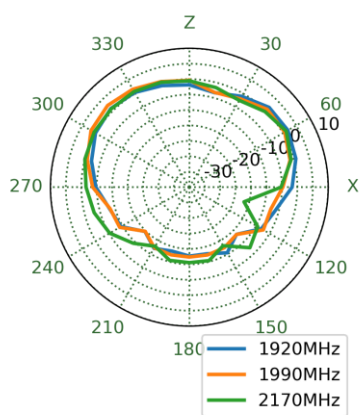


YZ Plane

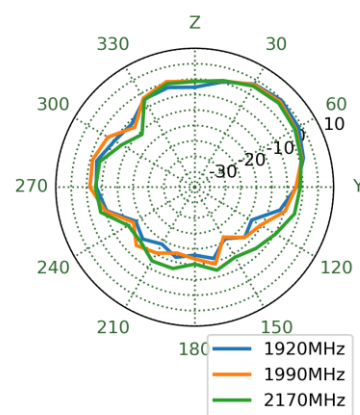


2500MHz

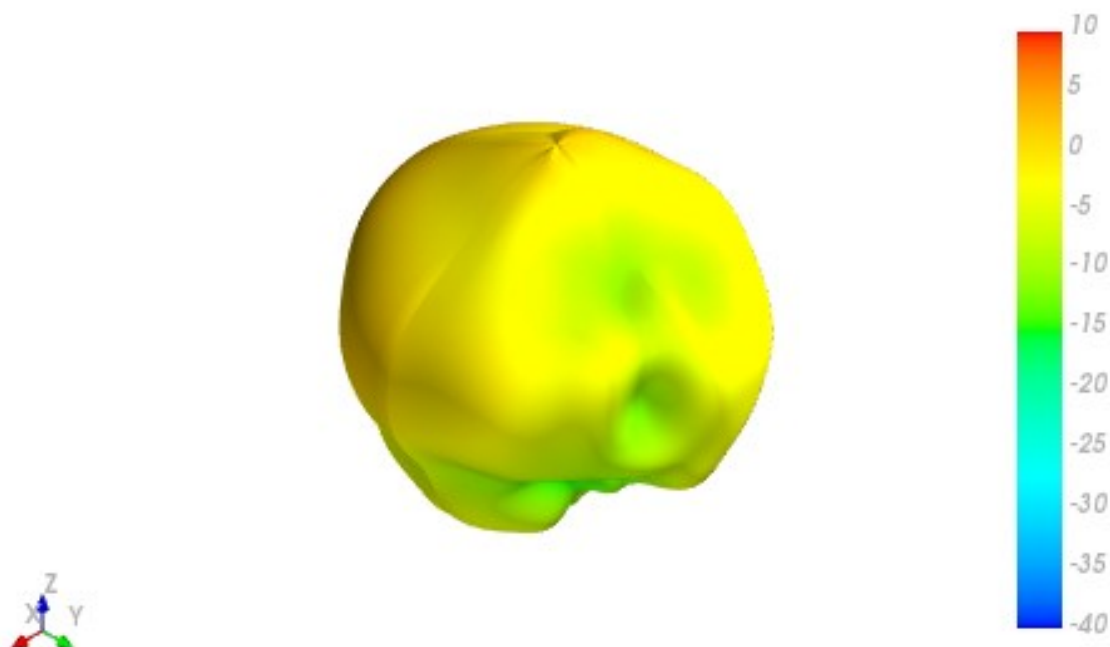


XY Plane

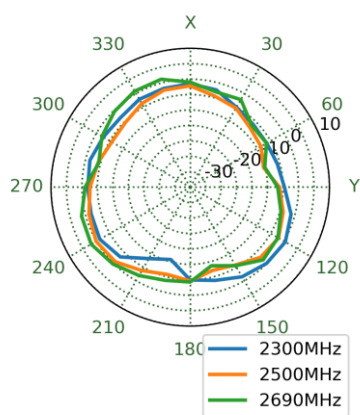

XZ Plane

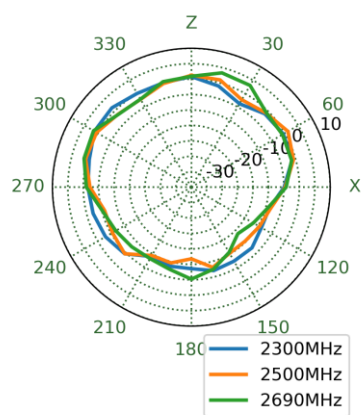


YZ Plane

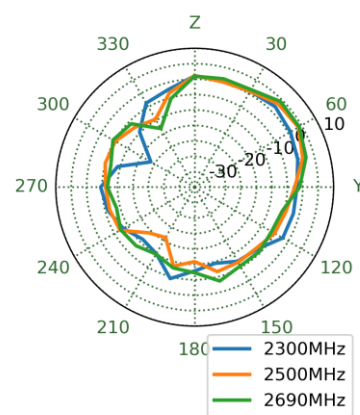


8.5 Wi-Fi MIMO 1 2D & 3D Radiation Patterns


2450MHz

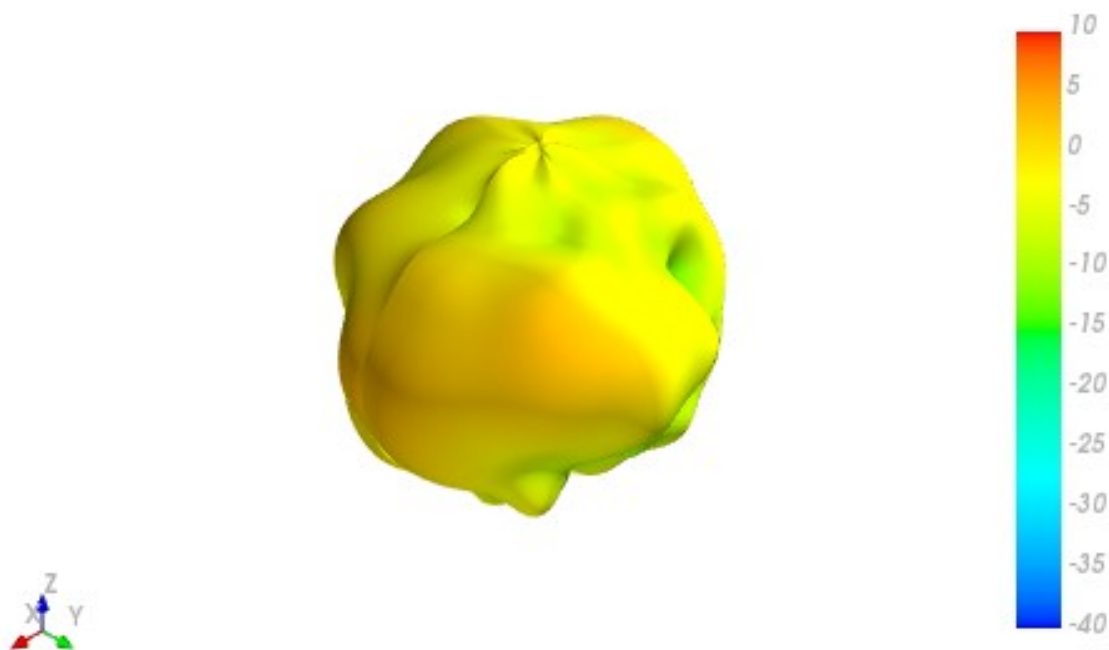


XY Plane

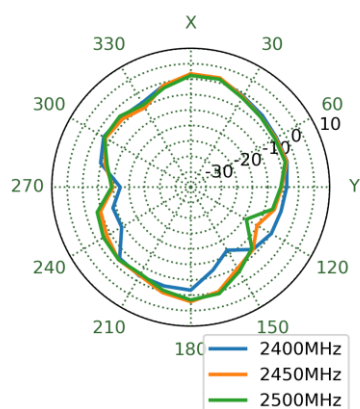


XZ Plane

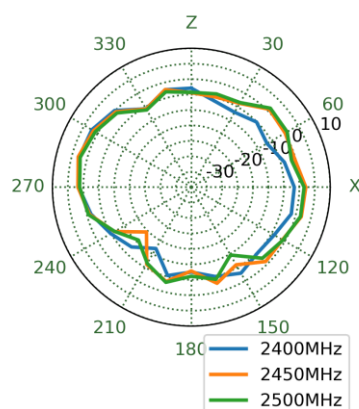


YZ Plane

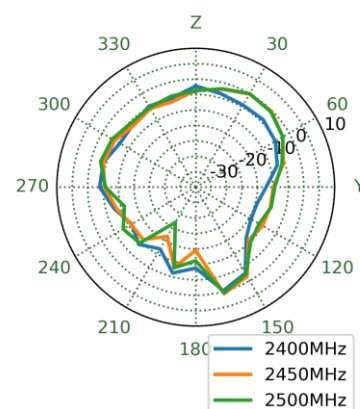


5550MHz

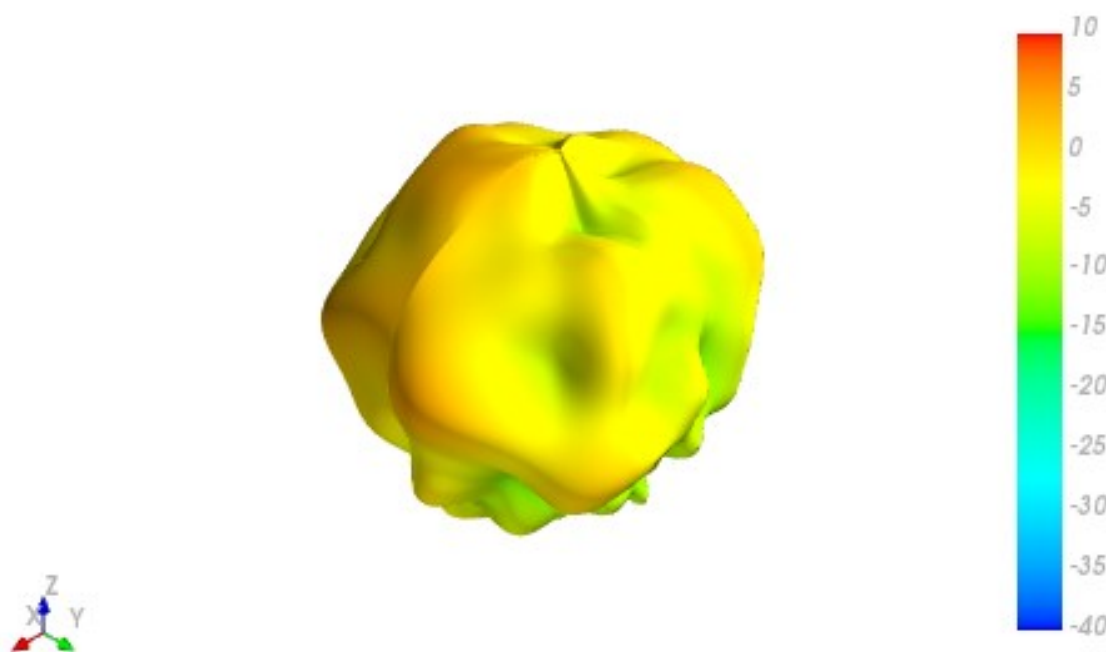


XY Plane

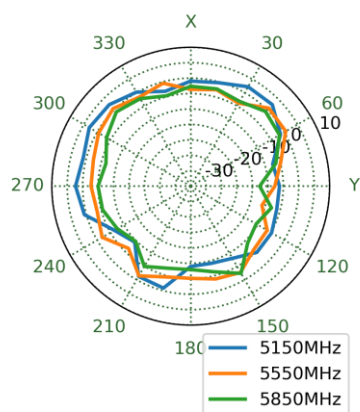

XZ Plane

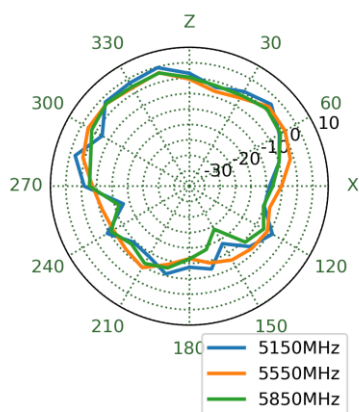


YZ Plane

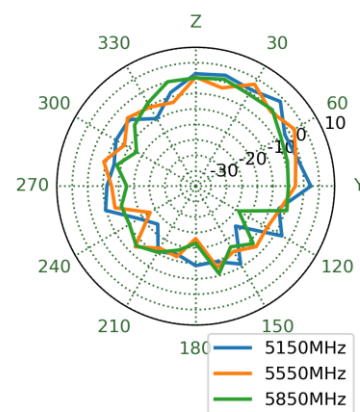


8.6 Wi-Fi MIMO 1 2D & 3D Radiation Patterns


2450MHz

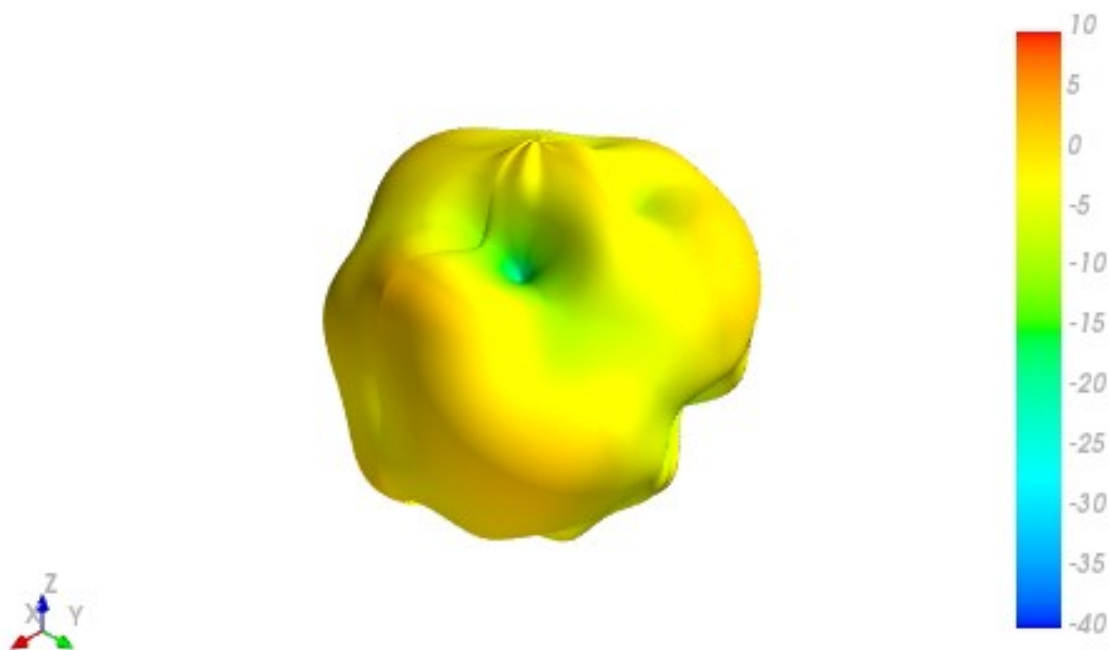


XY Plane

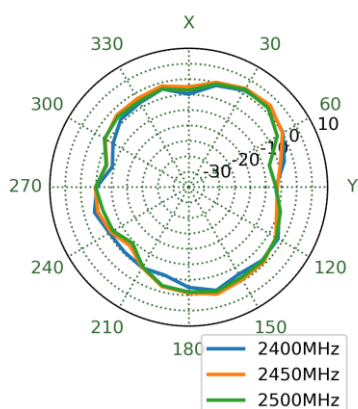


XZ Plane

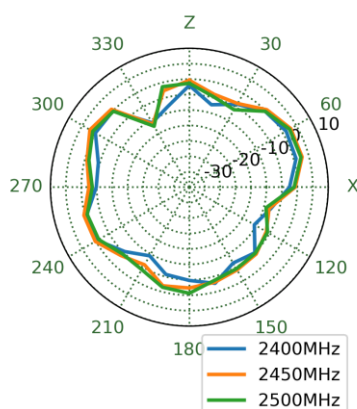


YZ Plane

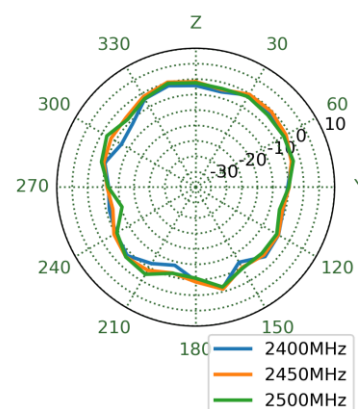


5550MHz

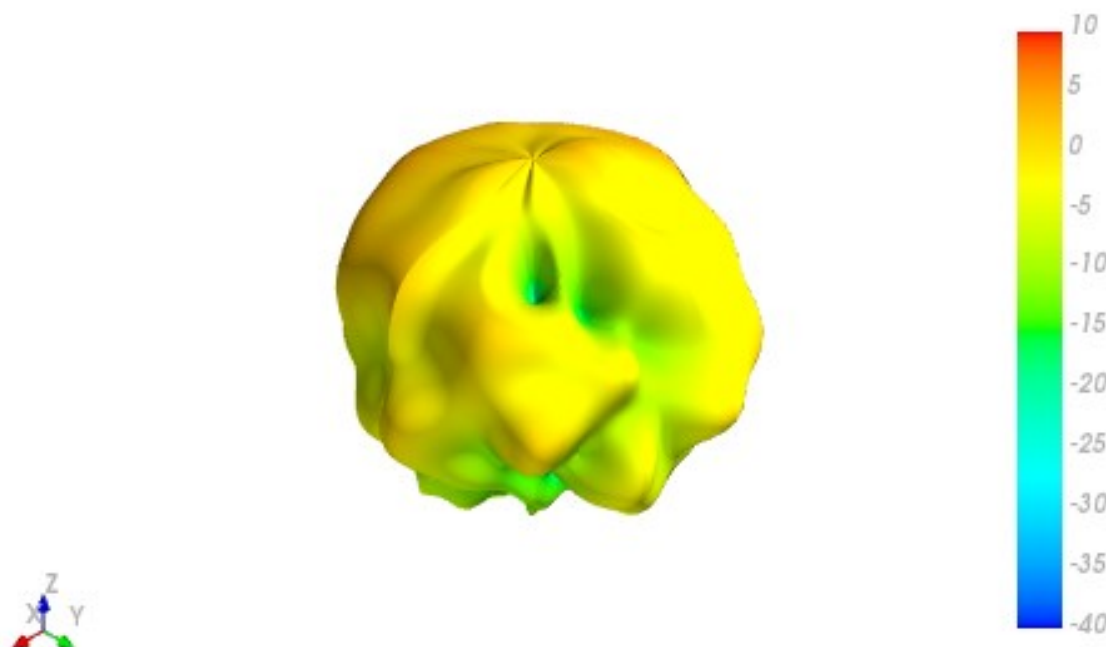


XY Plane

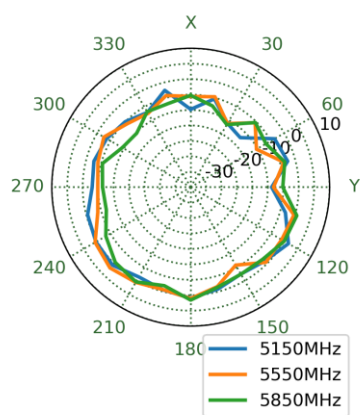

XZ Plane

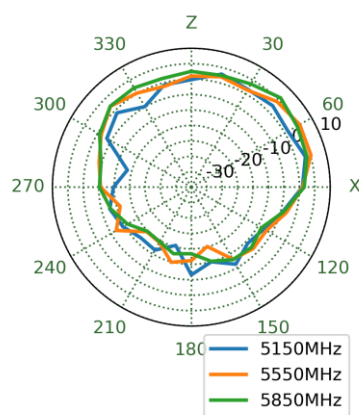



YZ Plane


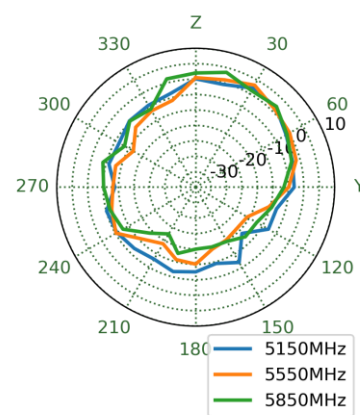



9. Application Note

The MA1290 antenna GPS, Cellular & Wi-Fi performance with different cable lengths is shown below


9.1 Return Loss

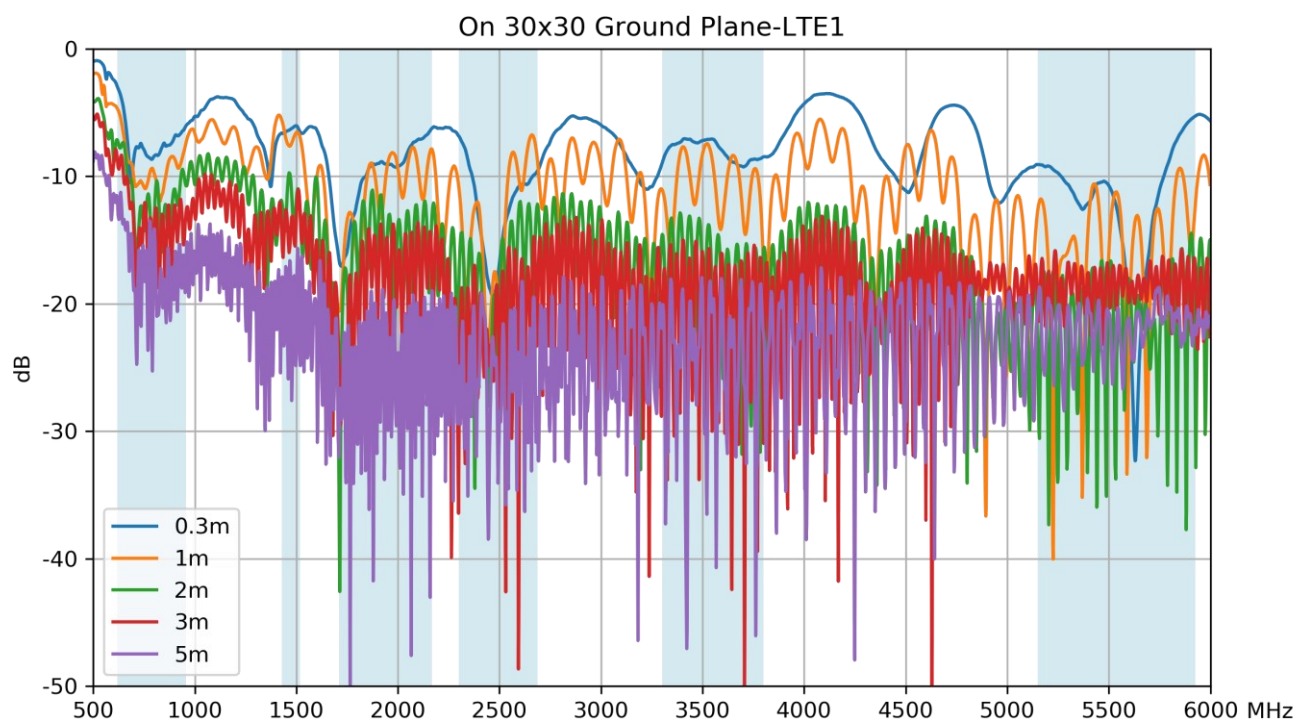
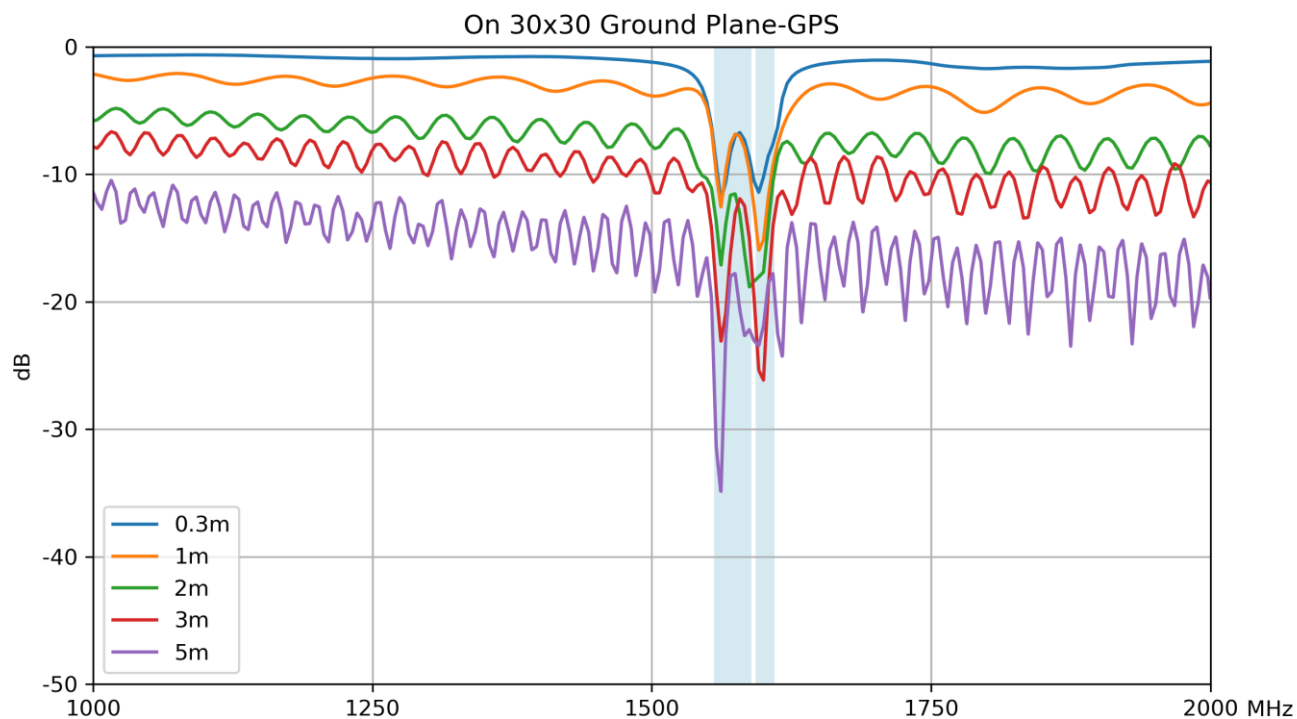


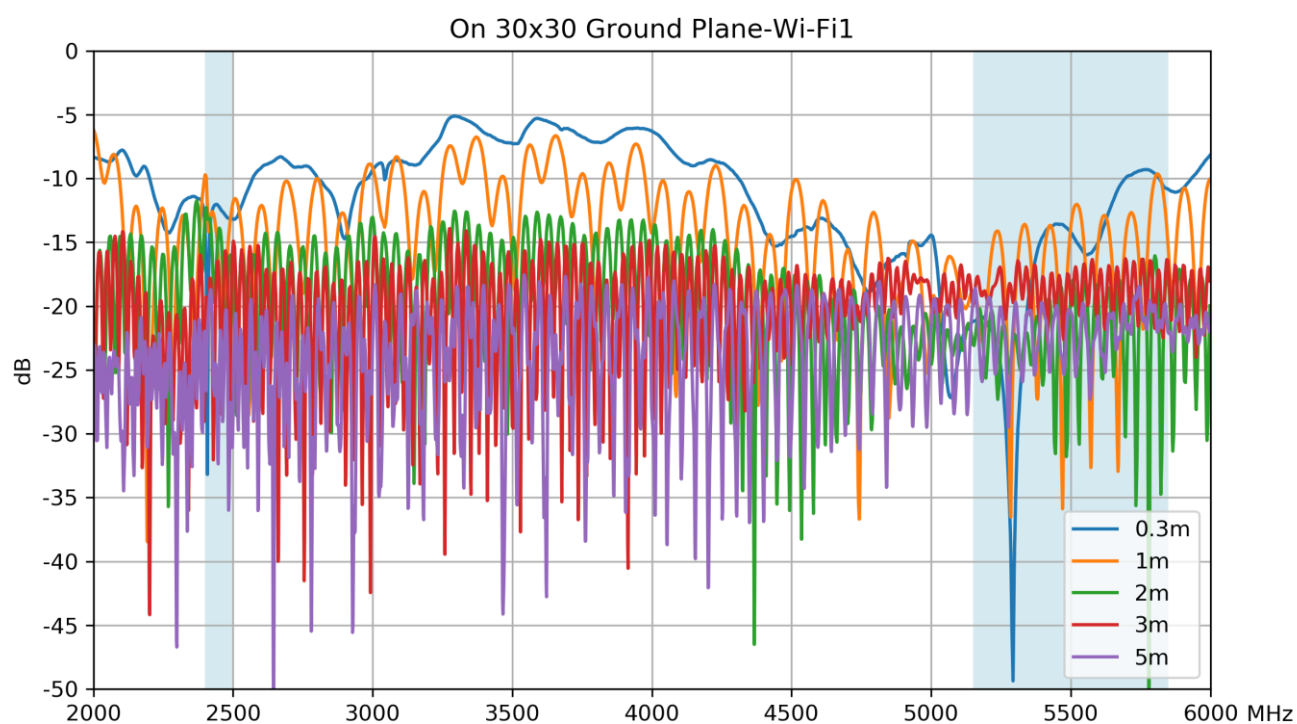
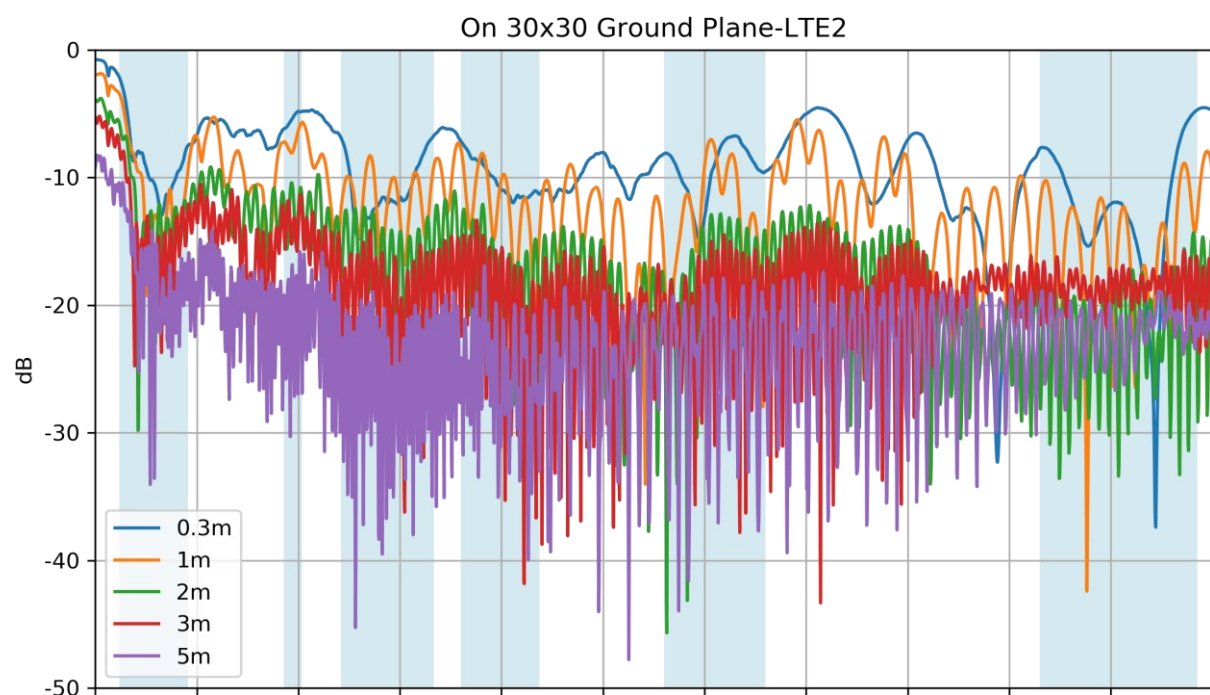


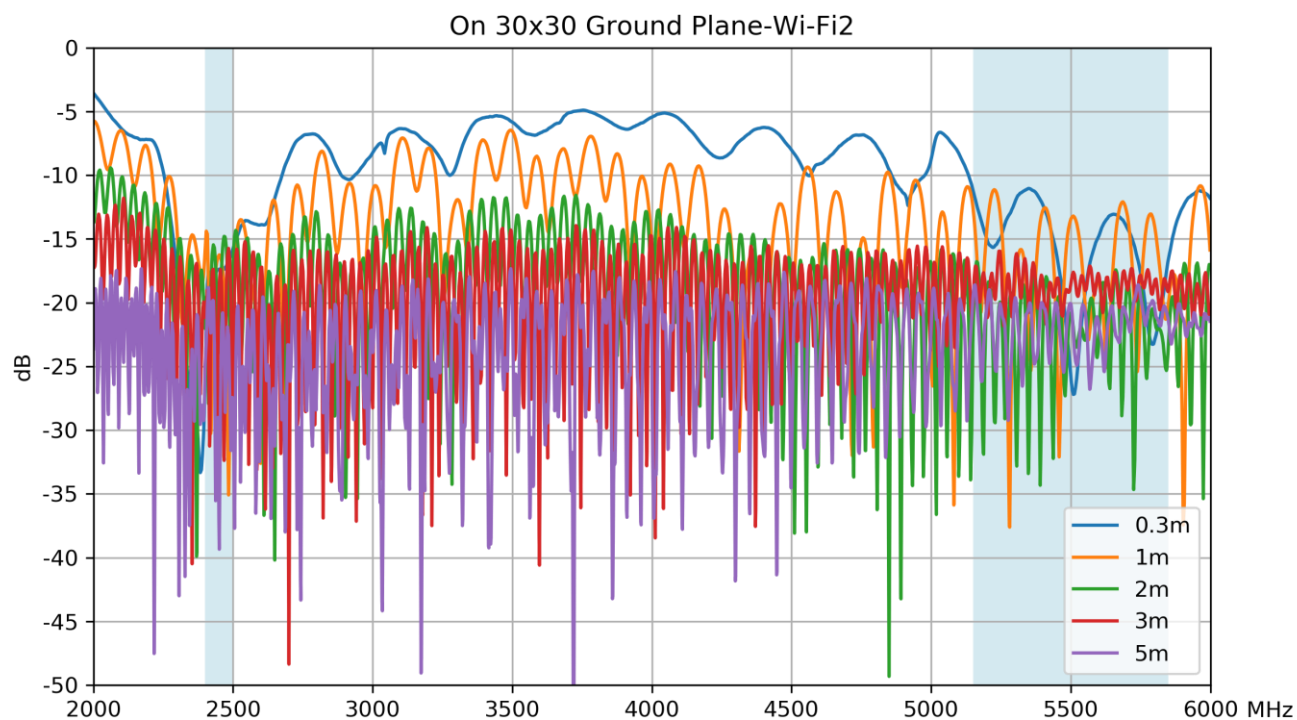



9.2 Efficiency


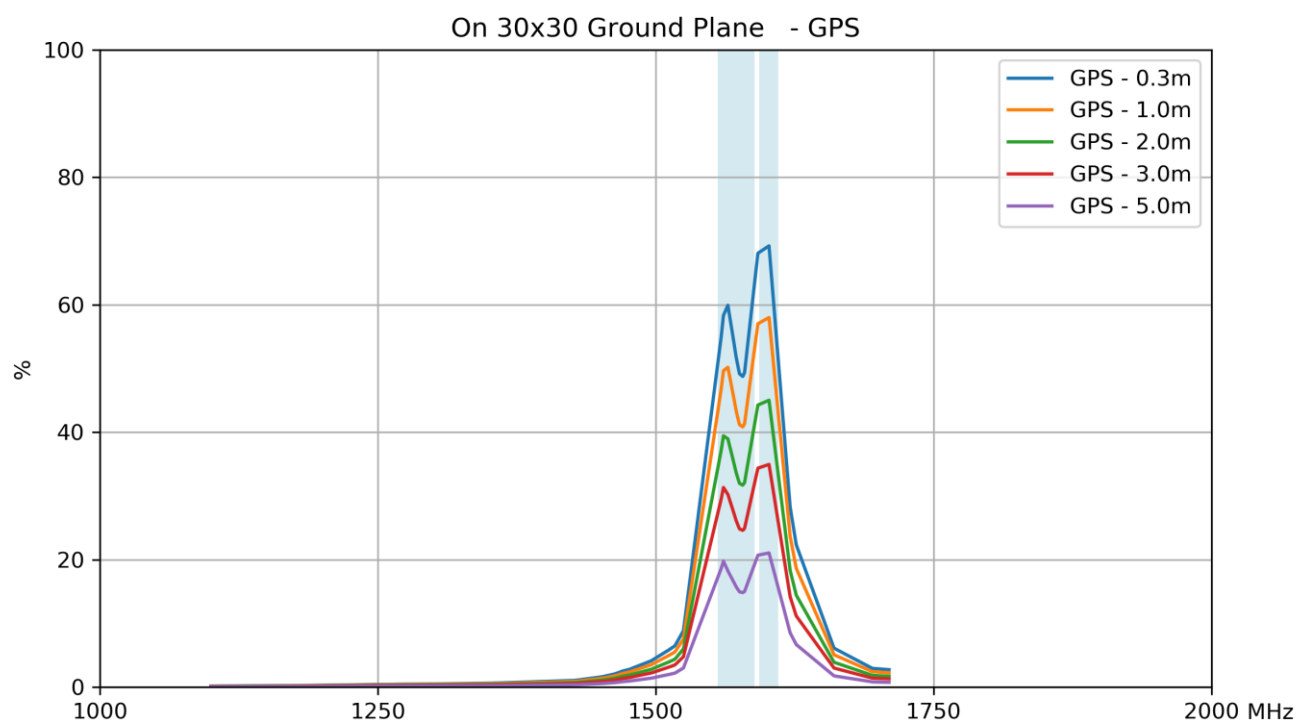


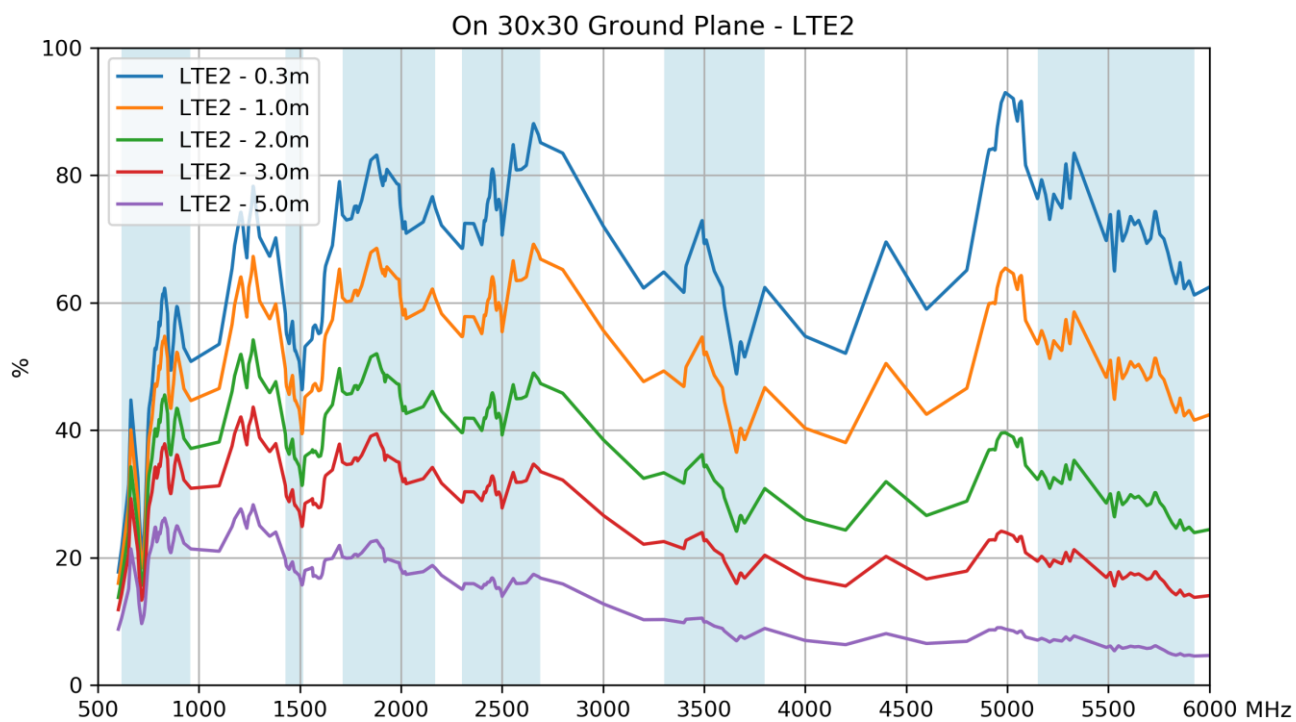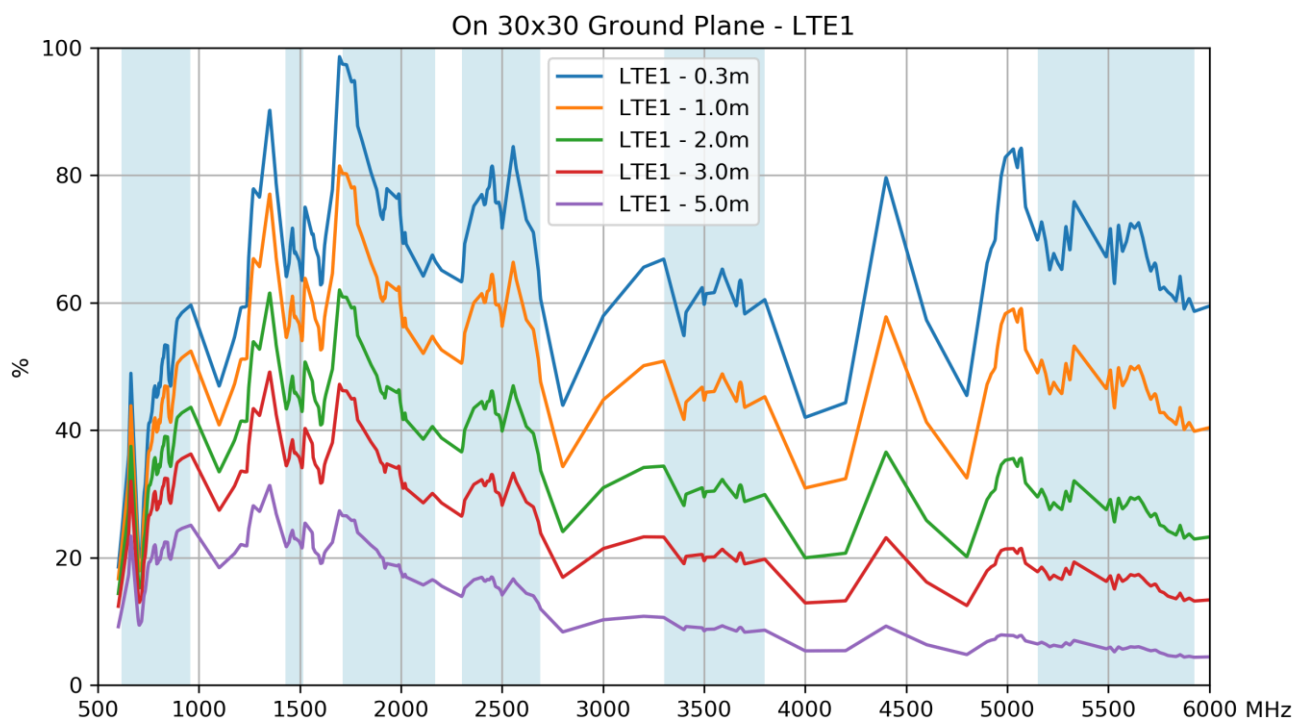


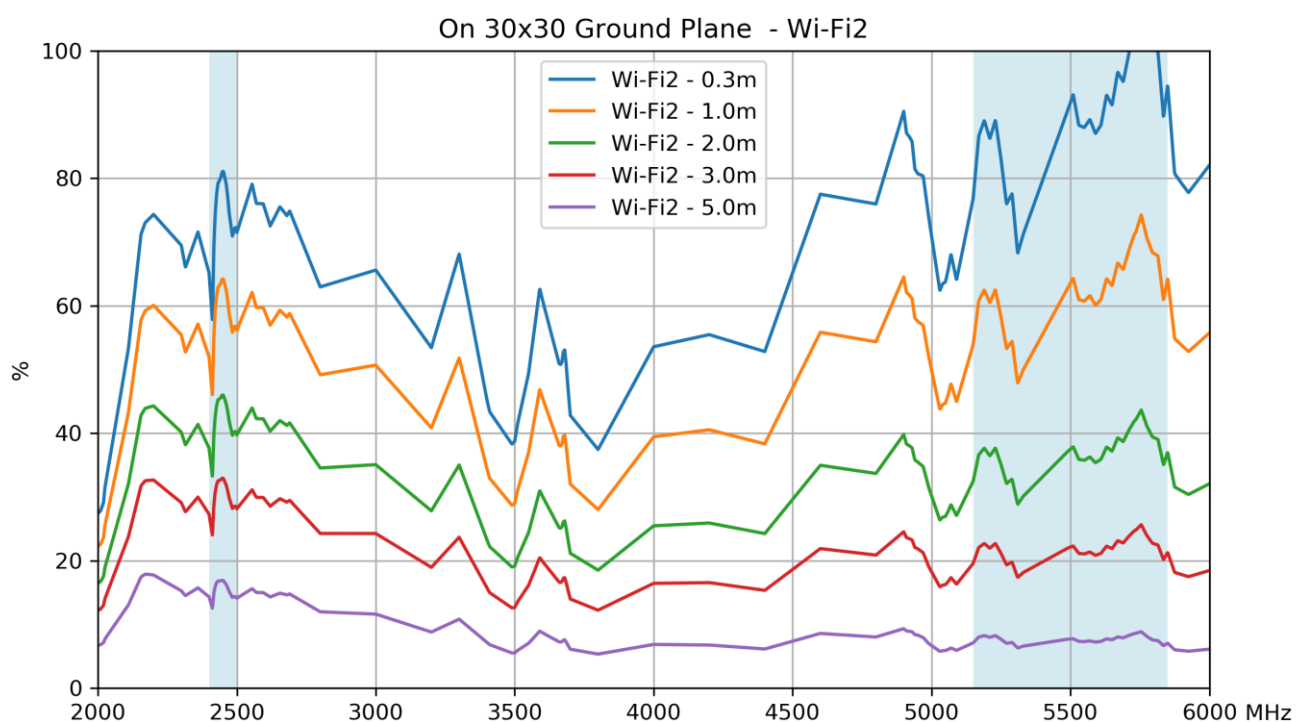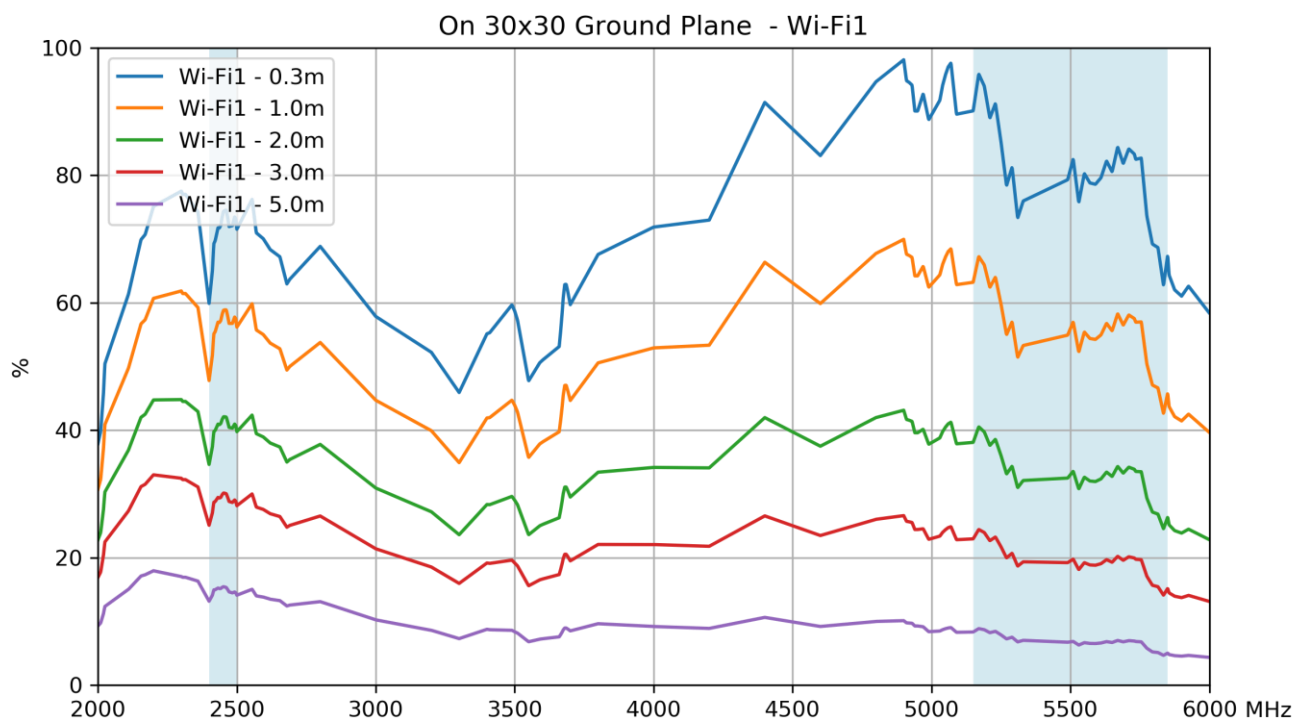


9.3 Average Gain

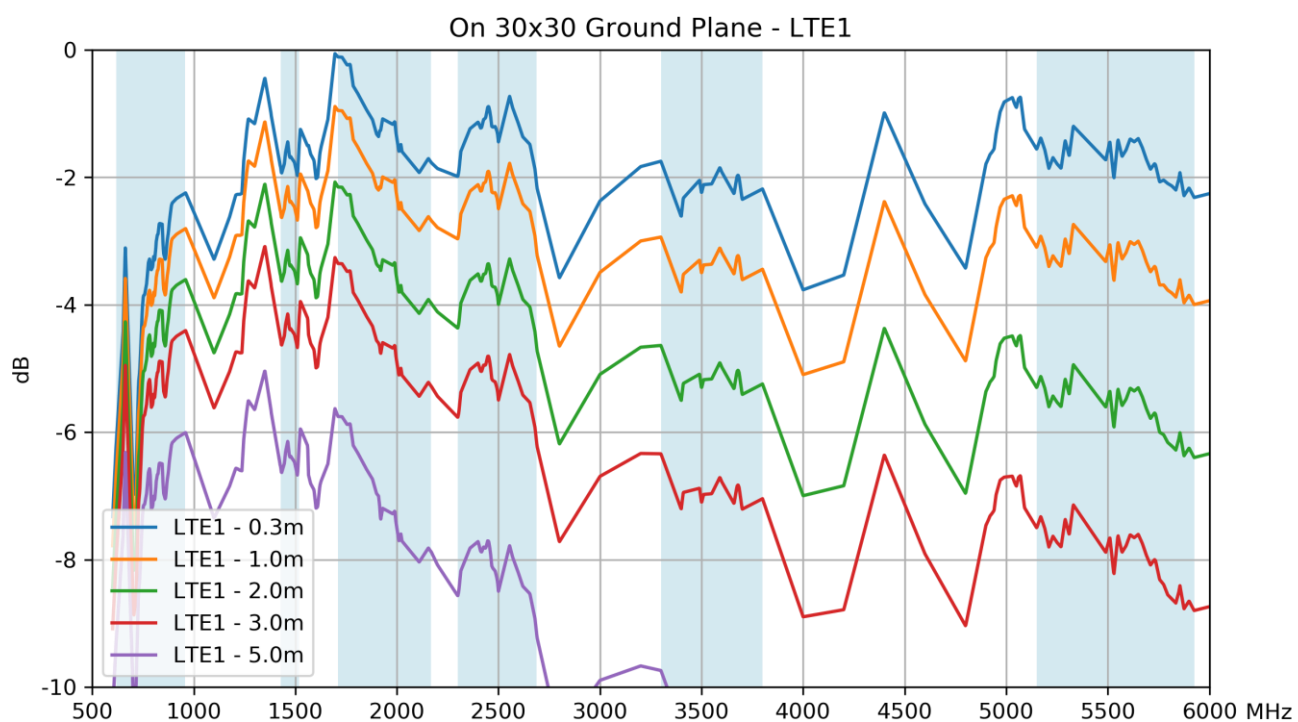
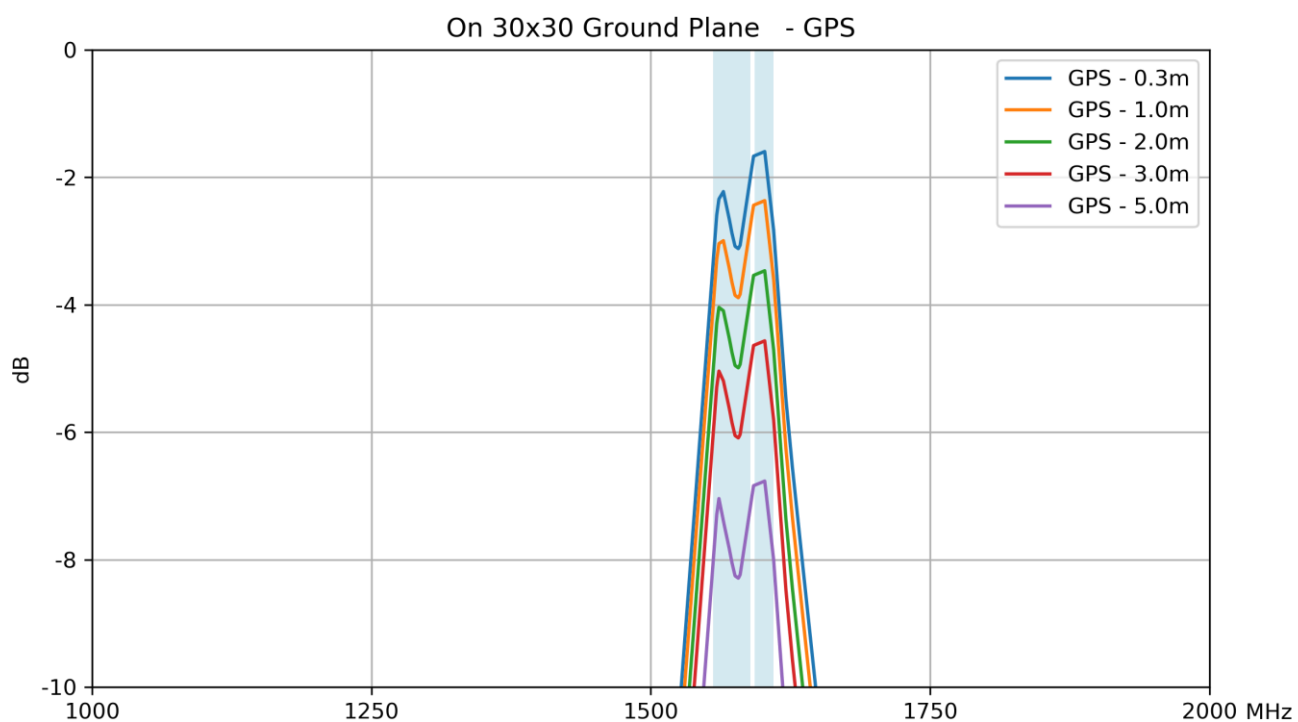


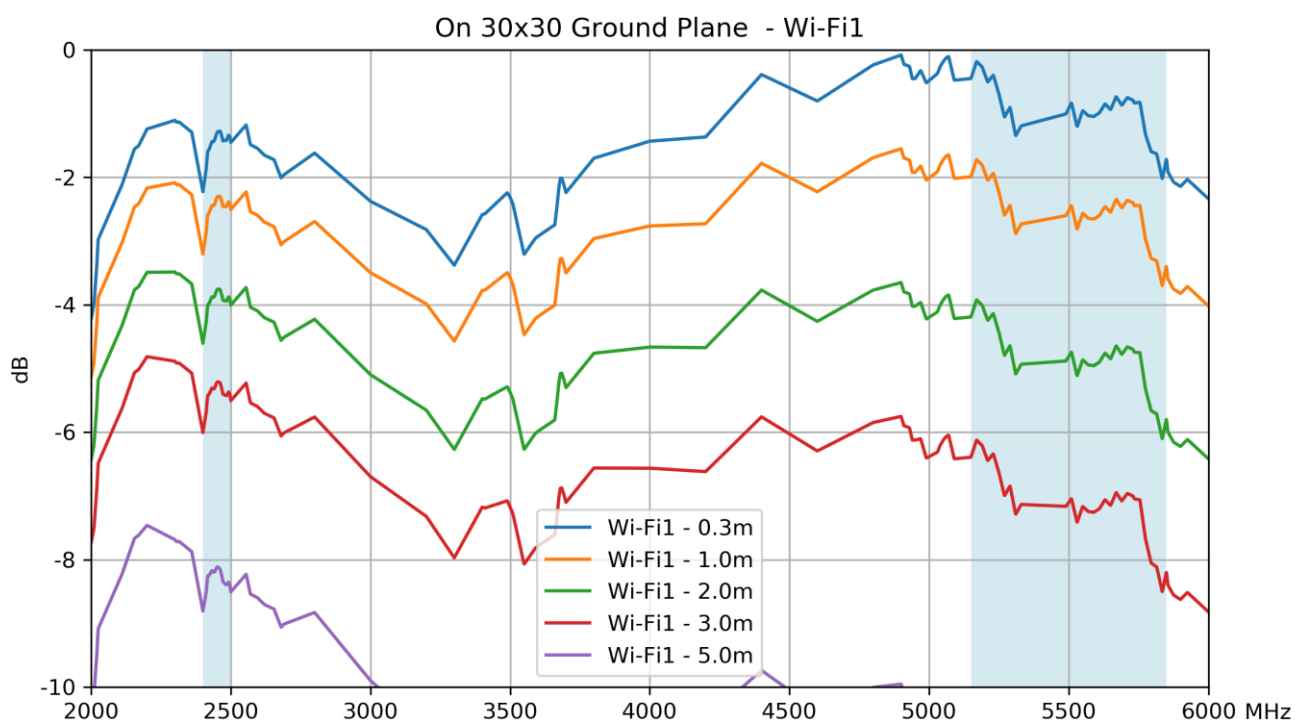
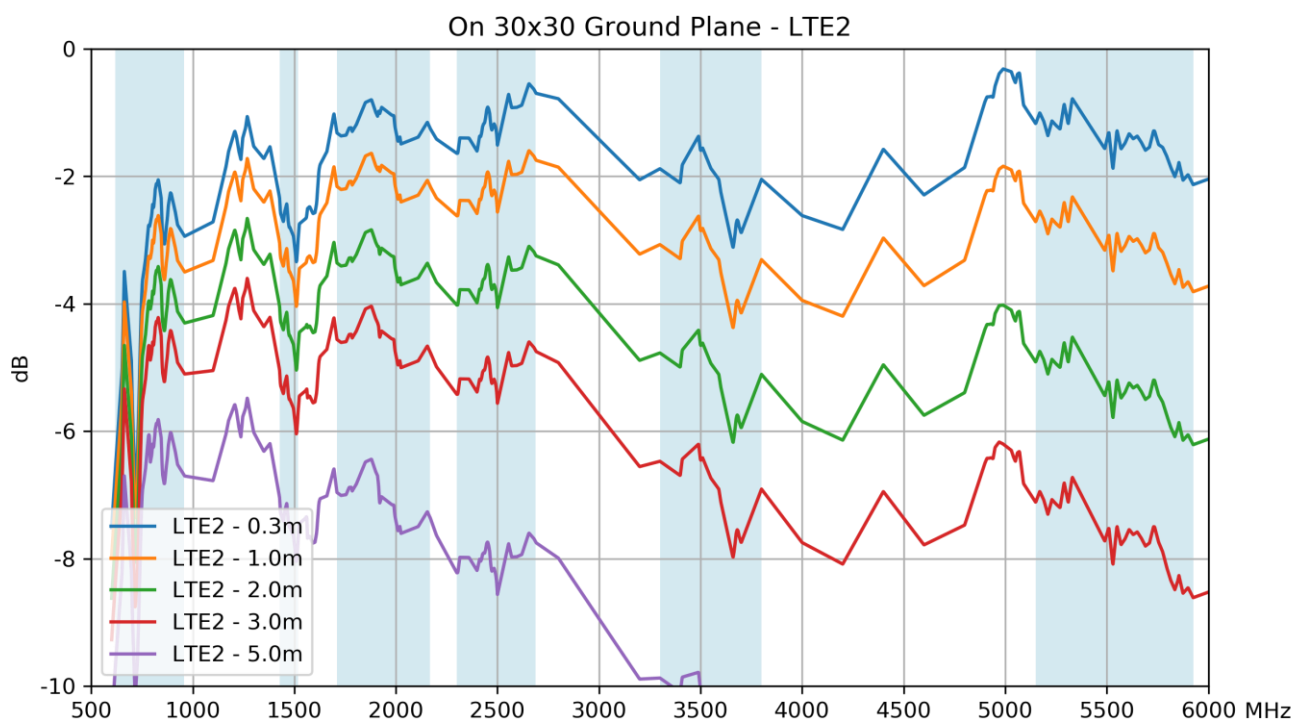


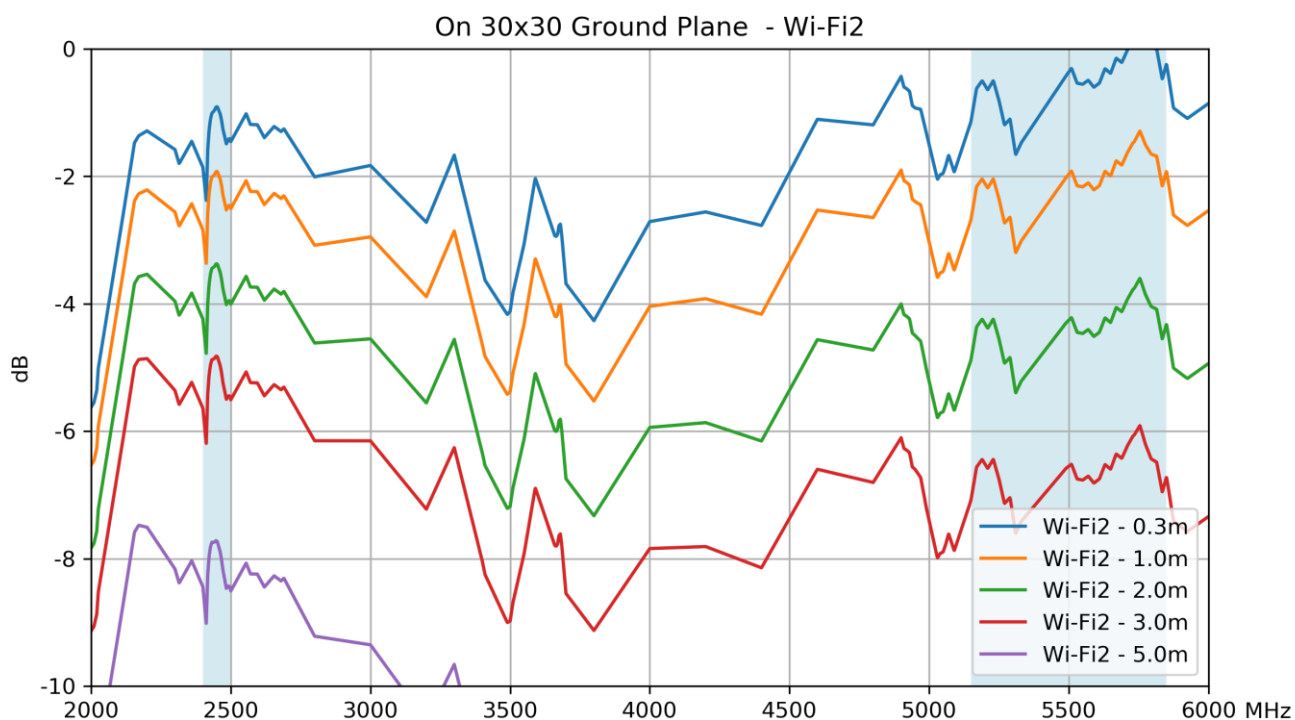

9.4 Peak Gain

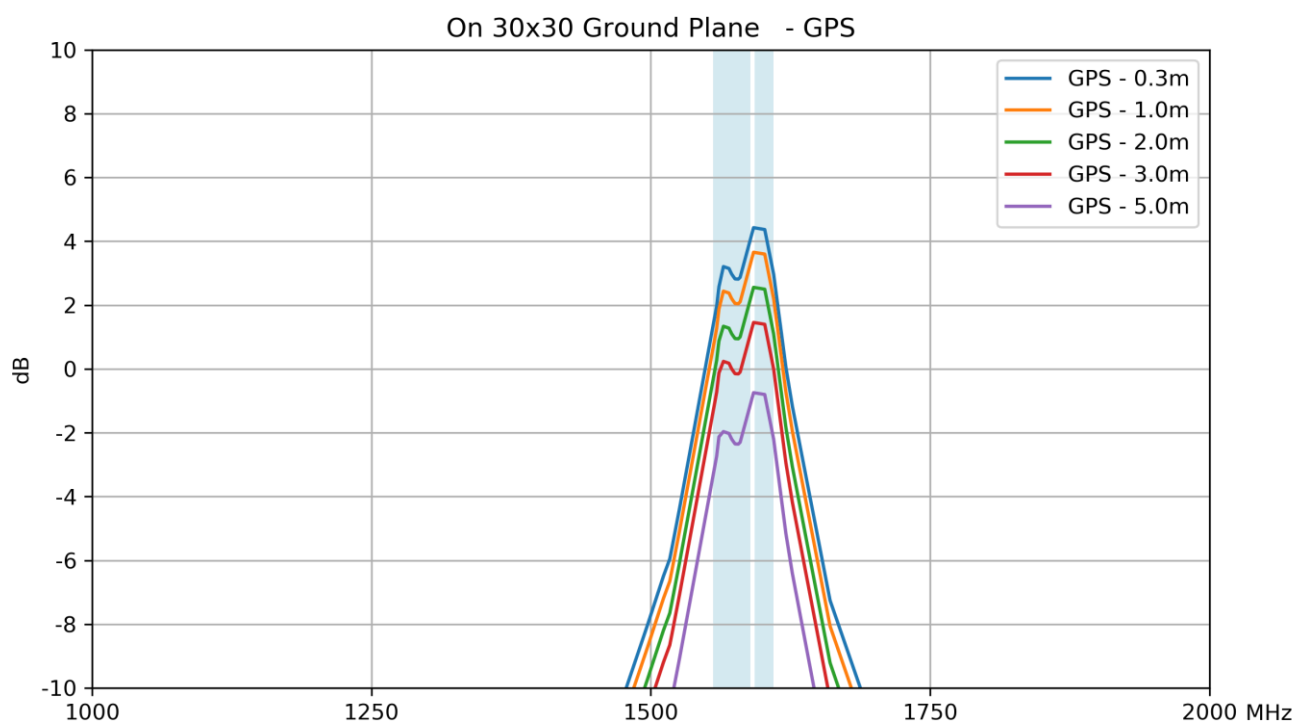

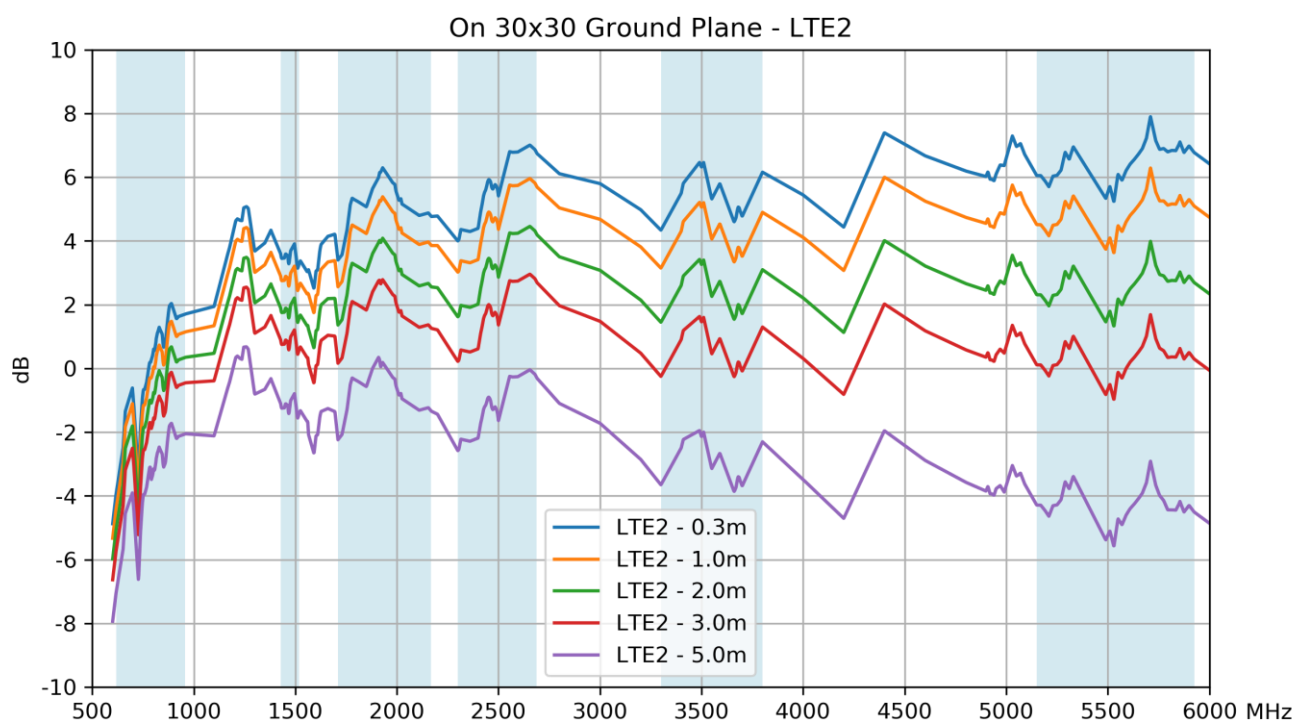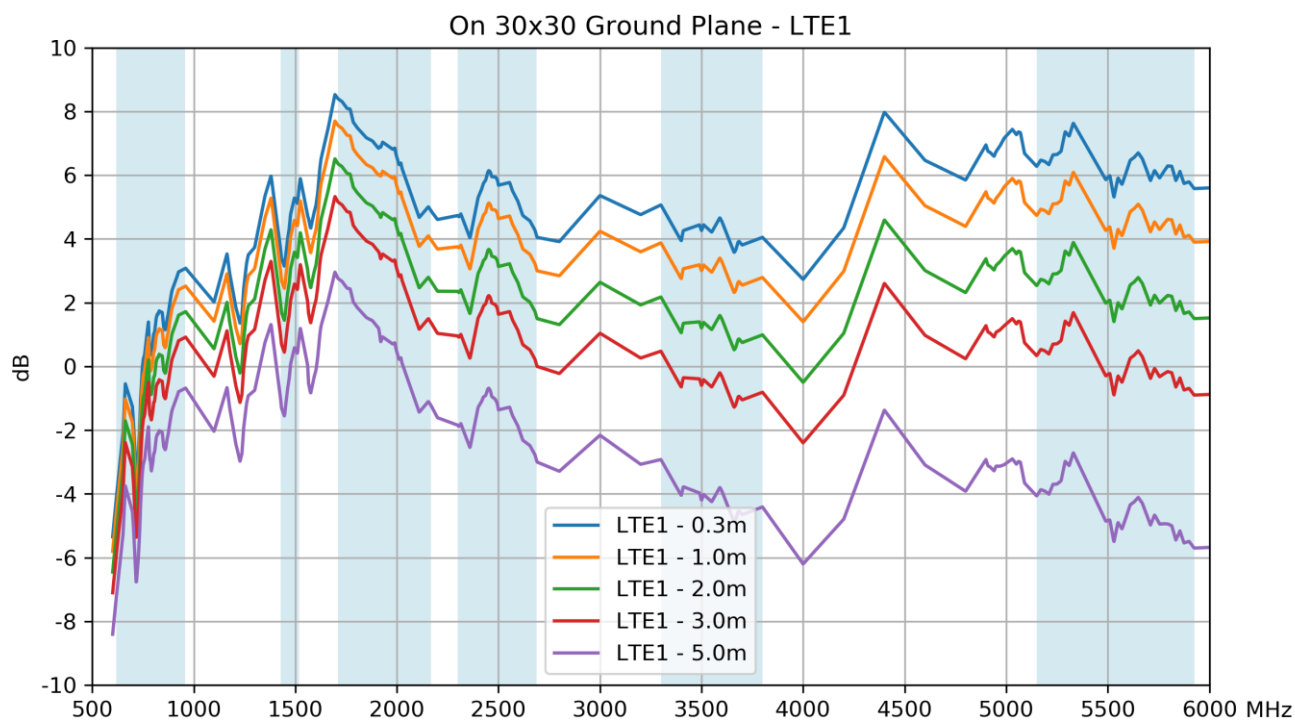

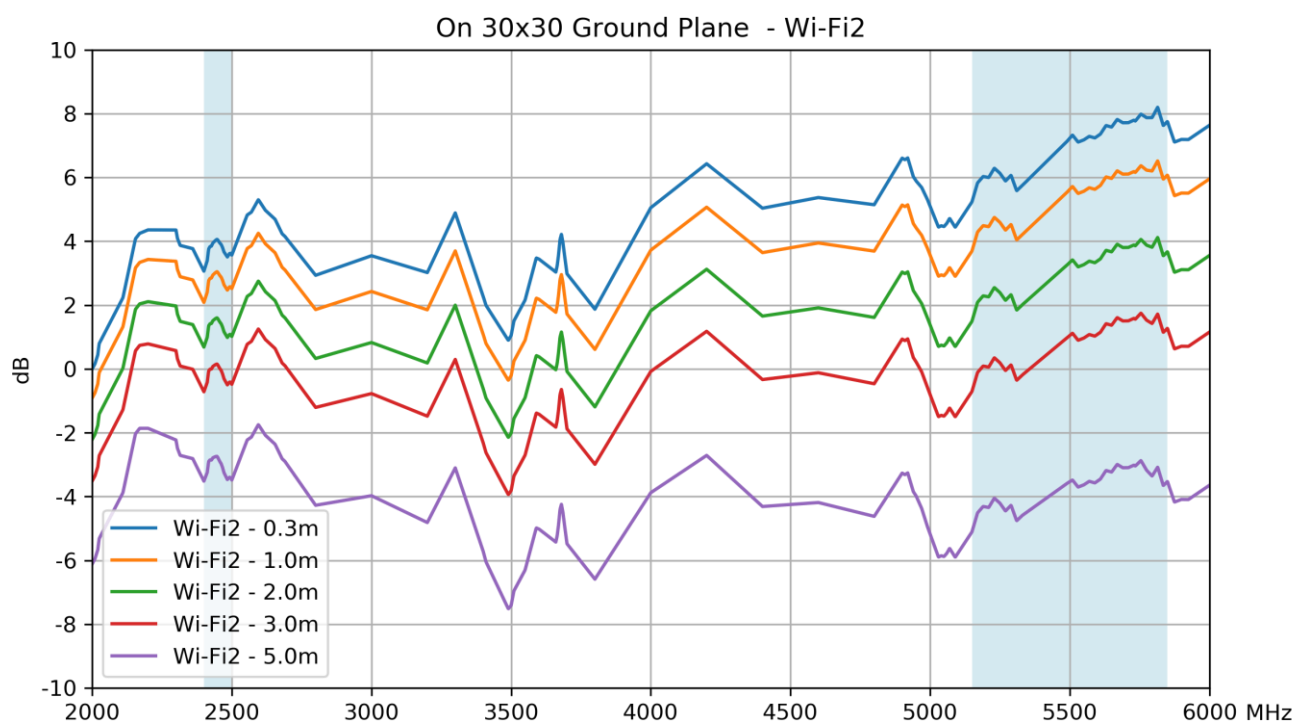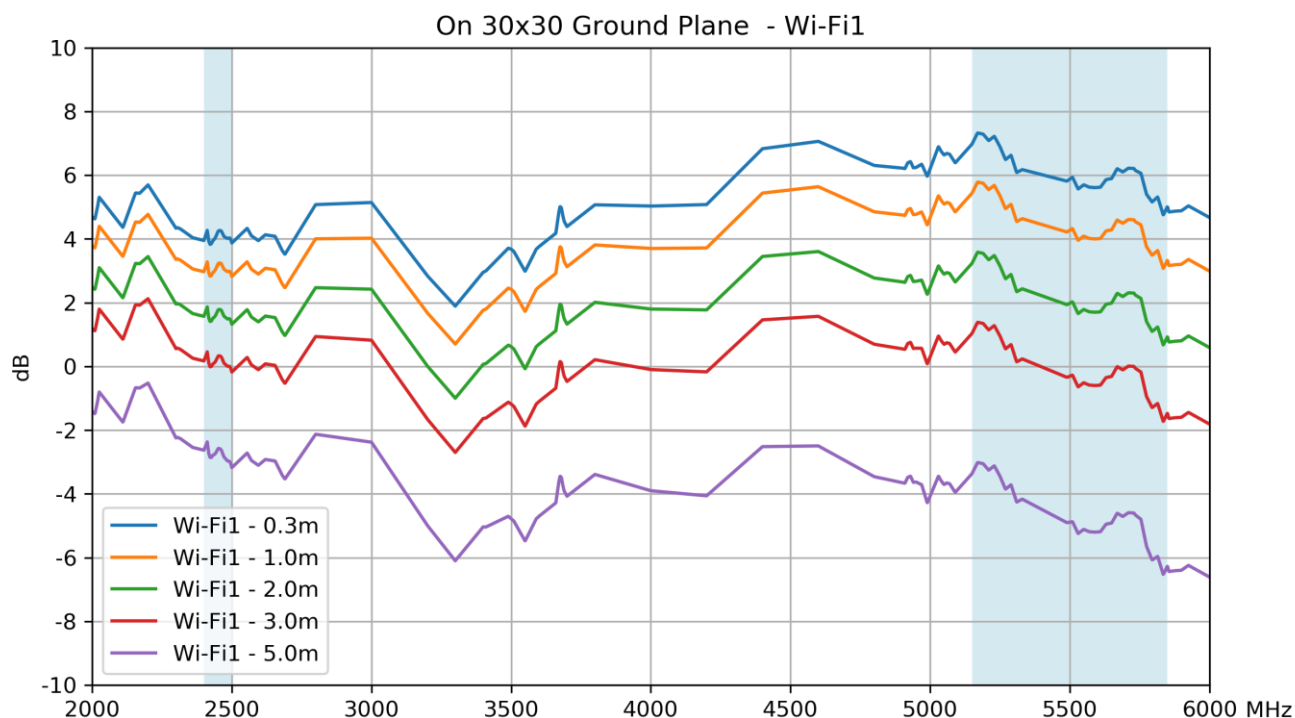

9.5 5G/4G performance over different cable lengths

9.6 Wi-Fi performance over different cable lengths

Frequency (MHz)	Cable Length	2400~2500	5150~5850
Efficiency (%)			
MIMO 1	0.3m	71.4	80.4
	1.0m	56.5	55.7
	2.0m	40.4	33.0
	3.0m	29.0	19.5
	5.0m	14.8	6.9
MIMO 2	0.3m	74.9	90.2
	1.0m	59.3	62.4
	2.0m	42.5	36.9
	3.0m	30.4	21.8
	5.0m	15.6	7.6
Average Gain (dB)			
MIMO 1	0.3m	-1.5	-1.0
	1.0m	-2.5	-2.5
	2.0m	-3.9	-4.8
	3.0m	-5.4	-7.1
	5.0m	-8.3	-11.6
MIMO 2	0.3m	-1.3	-0.5
	1.0m	-2.3	-2.1
	2.0m	-3.7	-4.3
	3.0m	-5.2	-6.6
	5.0m	-8.1	-11.2
Peak Gain (dBi)			
MIMO 1	0.3m	4.1	6.1
	1.0m	3.1	4.5
	2.0m	1.6	2.3
	3.0m	0.1	0.0
	5.0m	-2.8	-4.5
MIMO 2	0.3m	3.8	7.1
	1.0m	2.8	5.5
	2.0m	1.3	3.2
	3.0m	-0.1	0.9
	5.0m	-3.0	-3.7

Changelog for the datasheet

SPE-24-8-118 – MA1290.A.LBICGT.Y.001

Revision: B (Current Version)

Date:	2024-06-06
Notes:	Updated cable length from 5m to 3m.
Author:	Gary West

Previous Revisions

Revision: A (Original First Release)

Date:	2023-05-08
Notes:	
Author:	Jack Conroy



www.taoglas.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Taoglas](#) manufacturer:

Other Similar products are found below :

[108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#)
[GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#)
[NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [A21H0](#) [29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-](#)
[2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#)
[J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-GPS181804-WY](#) [TX5800-JZ-5](#) [3E0301BK-006](#) [PRO-OB-440](#) [ACR0301U](#)
[BWGNSCNX9-9B1Y4L120](#) [BWGPSCNX20-20B1Y4L120](#) [DL-J023-5GB](#) [3N0101BK-017](#) [3N0301BK-003](#)