


## Excilibur™ LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIER

### FEATURES

- **Qualified for Automotive Applications**
- **Low Noise**
  - **10 Hz: 15 nV/ $\sqrt{\text{Hz}}$**
  - **1 kHz: 10.5 nV/ $\sqrt{\text{Hz}}$**
- **10000-pF Load Capability**
- **20-mA Short-Circuit Output Current (Min)**
- **27-V/ $\mu\text{s}$  Slew Rate (Min)**
- **High Gain-Bandwidth Product: 5.9 MHz**
- **Single or Split Supply: 4 V to 44 V**
- **Fast Settling Time**
  - **340 ns to 0.1%**
  - **400 ns to 0.01%**
- **Large Output Swing:**  
 $V_{CC-} + 0.1 \text{ V}$  to  $V_{CC+} - 1 \text{ V}$



### DESCRIPTION/ORDERING INFORMATION

The TLE2142 device is a high-performance, internally compensated operational amplifier built using the Texas Instruments complementary bipolar Excilibur™ process. It is a pin-compatible upgrade to standard industry products.

The design incorporates an input stage that simultaneously achieves low audio-band noise of 10.5 nV/ $\sqrt{\text{Hz}}$  with a 10-Hz 1/f corner and symmetrical 40-V/ $\mu\text{s}$  slew rate typically with loads up to 800 pF. The resulting low distortion and high power bandwidth are important in high-fidelity audio applications. A fast settling time of 340 ns to 0.1% of a 10-V step with a 2-k $\Omega$ /100-pF load is useful in fast actuator/positioning drivers. Under similar test conditions, settling time to 0.01% is 400 ns.

The device is stable with capacitive loads up to 10 nF, although the 6-MHz bandwidth decreases to 1.8 MHz at this high loading level. As such, the TLE2142 is useful for low-droop sample-and-holds and direct buffering of long cables, including 4-mA to 20-mA current loops.

The special design also exhibits an improved insensitivity to inherent integrated circuit component mismatches as is evidenced by a 500- $\mu\text{V}$  maximum offset voltage and 1.7- $\mu\text{V}/^{\circ}\text{C}$  typical drift. Minimum common-mode rejection ratio and supply-voltage rejection ratio are 85 dB and 90 dB, respectively.

Device performance is relatively independent of supply voltage over the  $\pm 2\text{-V}$  to  $\pm 22\text{-V}$  range. Inputs can operate between  $V_{CC-} - 0.3 \text{ V}$  to  $V_{CC+} - 1.8 \text{ V}$  without inducing phase reversal, although excessive input current may flow out of each input exceeding the lower common-mode input range. The all-npn output stage provides a nearly rail-to-rail output swing of  $V_{CC-} + 0.1 \text{ V}$  to  $V_{CC+} - 1 \text{ V}$  under light current-loading conditions. The device can sustain shorts to either supply, because output current is internally limited, but care must be taken to ensure that maximum package power dissipation is not exceeded.

The TLE2142 can also be used as a comparator. Differential inputs of  $V_{CC\pm}$  can be maintained without damage to the device. Open-loop propagation delay with TTL supply levels is typically 200 ns. This gives a good indication as to output stage saturation recovery when the device is driven beyond the limits of recommended output swing.


The TLE2142 device is available in industry-standard 8-pin small-outline (D) packages. The device is characterized for operation from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Excilibur is a trademark of Texas Instruments.


## SYMBOL (EACH AMPLIFIER)

ORDERING INFORMATION<sup>(1)</sup>

T <sub>A</sub>	PACKAGE <sup>(2)</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 125°C	SOIC – D	Reel of 2500	TLE2142QDRQ1	2142Q

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

# EQUIVALENT SCHEMATIC

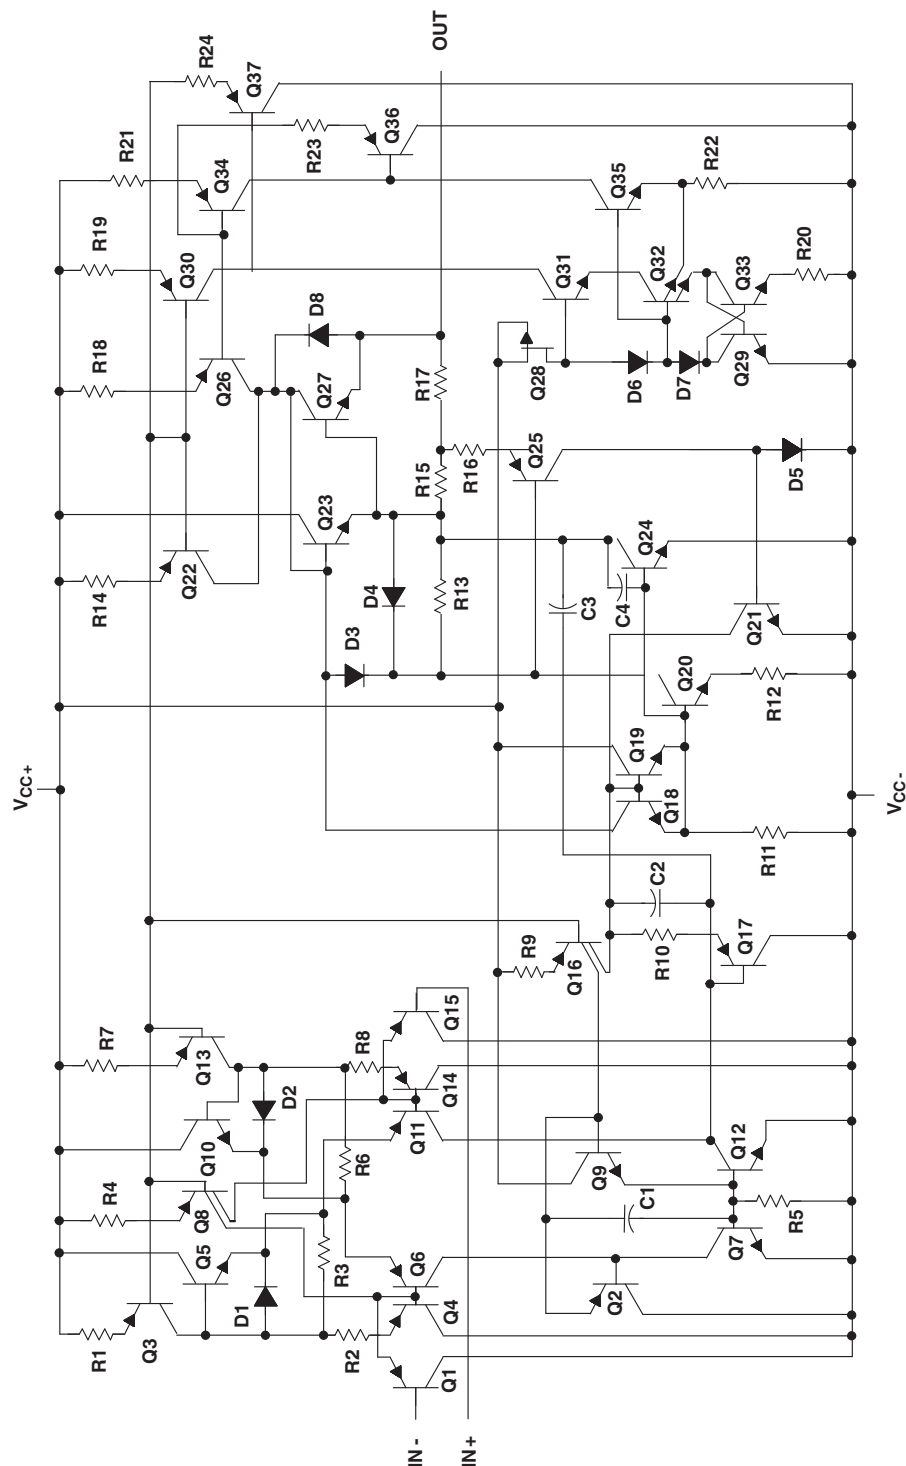

DEVICE COMPONENT COUNT

COMPONENT	TLE2142
Transistors	65
Resistors	43
Diodes	14
Capacitors	8
Epi-FET	1

**ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>**

over operating free-air temperature range (unless otherwise noted)

$V_{CC+}$	Supply voltage <sup>(2)</sup>	22 V
$V_{CC-}$	Supply voltage	–22 V
$V_{ID}$	Differential input voltage <sup>(3)</sup>	±44 V
$V_I$	Input voltage range (any input)	$V_{CC+}$ to $(V_{CC-} - 0.3)$ V
$I_I$	Input current (each input)	±1 mA
$I_O$	Output current	±80 mA
	Total current into $V_{CC+}$	80 mA
	Total current out of $V_{CC-}$	80 mA
	Duration of short-circuit current at (or below) 25°C <sup>(4)</sup>	Unlimited
$\theta_{JA}$	Package thermal impedance <sup>(5)(6)</sup>	97.1°C/W
$T_A$	Operating free-air temperature range	–40°C to 125°C
$T_{stg}$	Storage temperature range	–65°C to 150°C
	Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
ESD	Electrostatic discharge rating, Human-body model	500 V

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
- (3) Differential voltages are at  $IN+$  with respect to  $IN-$ . Excessive current flows, if input, are brought below  $V_{CC-} - 0.3$  V.
- (4) The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.
- (5) Maximum power dissipation is a function of  $T_J(\max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.
- (6) The package thermal impedance is calculated in accordance with JESD 51-7.

**RECOMMENDED OPERATING CONDITIONS**

			MIN	MAX	UNIT
V <sub>CC±</sub>	Supply voltage		±2	±22	V
V <sub>IC</sub>	Common-mode input voltage	V <sub>CC</sub> = 5 V	0	2.7	V
		V <sub>CC±</sub> = ±15 V	−15	12.7	
T <sub>A</sub>	Operating free-air temperature		−40	125	°C

## ELECTRICAL CHARACTERISTICS

 $V_{CC} = 5\text{ V}$ , at specified free-air temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS	$T_A^{(1)}$	MIN	TYP	MAX	UNIT
$V_{IO}$ Input offset voltage	$V_O = 2.5\text{ V}$ , $R_S = 50\ \Omega$ , $V_{IC} = 2.5\text{ V}$	25°C		220	1900	$\mu\text{V}$
		Full range			2600	
$\alpha_{VIO}$ Temperature coefficient of input offset voltage	$V_O = 2.5\text{ V}$ , $R_S = 50\ \Omega$ , $V_{IC} = 2.5\text{ V}$	Full range		1.7		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$ Input offset current	$V_O = 2.5\text{ V}$ , $R_S = 50\ \Omega$ , $V_{IC} = 2.5\text{ V}$	25°C		8	100	nA
		Full range			200	
$I_{IB}$ Input bias current	$V_O = 2.5\text{ V}$ , $R_S = 50\ \Omega$ , $V_{IC} = 2.5\text{ V}$	25°C		–0.8	–2	$\mu\text{A}$
		Full range			–2.3	
$V_{ICR}$ Common-mode input voltage range	$R_S = 50\ \Omega$	25°C	0 to 3	–0.3 to 3.2		V
		Full range	0 to 2.7	–0.3 to 2.9		
$V_{OH}$ High-level output voltage	$I_{OH} = -150\ \mu\text{A}$	25°C	3.9	4.1		V
	$I_{OH} = -1.5\text{ mA}$		3.8	4		
	$I_{OH} = -15\text{ mA}$		3.4	3.7		
	$I_{OH} = -100\ \mu\text{A}$	Full range	3.75			
	$I_{OH} = -1\text{ mA}$		3.65			
	$I_{OH} = -10\text{ mA}$		3.45			
$V_{OL}$ Low-level output voltage	$I_{OL} = 150\ \mu\text{A}$	25°C		75	125	mV
	$I_{OL} = 1.5\text{ mA}$			150	225	
	$I_{OL} = 15\text{ mA}$			1.2	1.4	
	$I_{OL} = 100\ \mu\text{A}$	Full range			200	mV
	$I_{OL} = 1\text{ mA}$				250	
	$I_{OL} = 10\text{ mA}$				1.25	
$A_{VD}$ Large-signal differential voltage amplification	$V_{IC} = \pm 2.5\text{ V}$ , $R_L = 2\text{ k}\Omega$ , $V_O = 1\text{ V to } -1.5\text{ V}$	25°C	50	220		V/mV
		Full range	5			
$r_i$ Input resistance		25°C		70		M $\Omega$
$c_i$ Input capacitance		25°C		2.5		pF
$z_o$ Open-loop output impedance	$f = 1\text{ MHz}$	25°C		30		$\Omega$
CMRR Common-mode rejection ratio	$V_{IC} = V_{ICR(\text{min})}$ , $R_S = 50\ \Omega$	25°C	85	118		dB
		Full range	80			
$k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ )	$V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$ , $R_S = 50\ \Omega$	25°C	90	106		dB
		Full range	85			
$I_{CC}$ Supply current	$V_O = 2.5\text{ V}$ , No load, $V_{IC} = 2.5\text{ V}$	25°C		6.6	8.8	mA
		Full range			9.2	

(1) Full range is –40°C to 125°C.

## OPERATING CHARACTERISTICS

$V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR+	Positive slew rate	$A_{VD} = -1$ , $R_L = 2\text{ k}\Omega^{(1)}$ , $C_L = 500\text{ pF}$		45		V/ $\mu\text{s}$
SR–	Negative slew rate	$A_{VD} = -1$ , $R_L = 2\text{ k}\Omega^{(1)}$ , $C_L = 500\text{ pF}$		42		V/ $\mu\text{s}$
$t_s$	Settling time	$A_{VD} = -1$ , 2.5-V step	To 0.1%	0.16		$\mu\text{s}$
			To 0.01%	0.22		
$V_n$	Equivalent input noise voltage	$R_S = 20\ \Omega$	f = 10 Hz	15		nV/ $\sqrt{\text{Hz}}$
			f = 1 kHz	10.5		
$V_{n(PP)}$	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz		0.48		$\mu\text{V}$
		f = 0.1 Hz to 10 Hz		0.51		
$I_n$	Equivalent input noise current	f = 10 Hz		1.92		pA/ $\sqrt{\text{Hz}}$
		f = 1 kHz		0.5		
THD+N	Total harmonic distortion plus noise	$V_O = 1\text{ V to }3\text{ V}$ , $R_L = 2\text{ k}\Omega^{(1)}$ , $A_{VD} = 2$ , f = 10 kHz		0.0052		%
$B_1$	Unity-gain bandwidth	$R_L = 2\text{ k}\Omega^{(1)}$ , $C_L = 100\text{ pF}$		5.9		MHz
	Gain-bandwidth product	$R_L = 2\text{ k}\Omega^{(1)}$ , $C_L = 100\text{ pF}$ , f = 100 kHz		5.8		MHz
BOM	Maximum output-swing bandwidth	$V_{O(PP)} = 2\text{ V}$ , $R_L = 2\text{ k}\Omega^{(1)}$ , $A_{VD} = 1$ , $C_L = 100\text{ pF}$		660		kHz
$\phi_m$	Phase margin at unity gain	$R_L = 2\text{ k}\Omega^{(1)}$ , $C_L = 100\text{ pF}$		57		°

(1)  $R_L$  terminated at 2.5 V.

## ELECTRICAL CHARACTERISTICS

 $V_{CC} = \pm 15\text{ V}$ , at specified free-air temperature (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	MIN	TYP	MAX	UNIT
$V_{IO}$	Input offset voltage	$V_{IC} = 0$ , $R_S = 50\ \Omega$	25°C		290	1200	$\mu\text{V}$
			Full range			2000	
$\alpha_{VIO}$	Temperature coefficient of input offset voltage	$V_{IC} = 0$ , $R_S = 50\ \Omega$	Full range		1.7		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$	Input offset current	$V_{IC} = 0$ , $R_S = 50\ \Omega$	25°C		7	100	nA
			Full range			250	
$I_{IB}$	Input bias current	$V_{IC} = 0$ , $R_S = 50\ \Omega$	25°C		–0.7	–1.5	$\mu\text{A}$
			Full range			–1.8	
$V_{ICR}$	Common-mode input voltage range	$R_S = 50\ \Omega$	25°C	–15 to 13	–15.3 to 13.2		V
			Full range	–15 to 12.7	–15.3 to 12.9		
$V_{OM+}$	Maximum positive peak output voltage swing	$I_O = -150\ \mu\text{A}$	25°C		13.8	14.1	V
		$I_O = -1.5\ \text{mA}$			13.7	14	
		$I_O = -15\ \text{mA}$			13.3	13.7	
		$I_O = -100\ \mu\text{A}$	Full range		13.7		
		$I_O = -1\ \text{mA}$			13.6		
		$I_O = -10\ \text{mA}$			13.3		
$V_{OM-}$	Maximum negative peak output voltage swing	$I_O = 150\ \mu\text{A}$	25°C		–14.7	–14.9	V
		$I_O = 1.5\ \text{mA}$			–14.5	–14.8	
		$I_O = 15\ \text{mA}$			–13.4	–13.8	
		$I_O = 100\ \mu\text{A}$	Full range		–14.6		
		$I_O = 1\ \text{mA}$			–14.5		
		$I_O = 10\ \text{mA}$			–13.4		
$A_{VD}$	Large-signal differential voltage amplification	$V_O = \pm 10\ \text{V}$ , $R_L = 2\ \text{k}\Omega$	25°C	100	450		V/mV
			Full range	20			
$r_i$	Input resistance		25°C		65		M $\Omega$
$c_i$	Input capacitance		25°C		2.5		pF
$z_o$	Open-loop output impedance	$f = 1\ \text{MHz}$	25°C		30		$\Omega$
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR}(\text{min})$ , $R_S = 50\ \Omega$	25°C	85	108		dB
			Full range	80			
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ )	$V_{CC\pm} = \pm 2.5\ \text{V}$ to $\pm 15\ \text{V}$ , $R_S = 50\ \Omega$	25°C	90	106		dB
			Full range	85			
$I_{OS}$	Short-circuit output current	$V_O = 0$	25°C	$V_{ID} = 1\ \text{V}$	–25	–50	mA
				$V_{ID} = -1\ \text{V}$	20	31	
$I_{CC}$	Supply current	$V_O = 0$ , No load, $V_{IC} = 2.5\ \text{V}$	25°C		6.9	9	mA
			Full range			9.4	

(1) Full range is –40°C to 125°C.

## OPERATING CHARACTERISTICS

$V_{CC} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR+	Positive slew rate	$A_{VD} = -1$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$	27	45		V/ $\mu\text{s}$
SR–	Negative slew rate	$A_{VD} = -1$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$	27	42		V/ $\mu\text{s}$
$t_s$	Settling time	$A_{VD} = -1$ , 10-V step	To 0.1%	0.34		$\mu\text{s}$
			To 0.01%	0.4		
$V_n$	Equivalent input noise voltage	$R_S = 20\ \Omega$	$f = 10\text{ Hz}$	15		nV/ $\sqrt{\text{Hz}}$
			$f = 1\text{ kHz}$	10.5		
$V_{n(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }1\text{ Hz}$		0.48		$\mu\text{V}$
		$f = 0.1\text{ Hz to }10\text{ Hz}$		0.51		
$I_n$	Equivalent input noise current	$f = 10\text{ Hz}$		1.89		pA/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		0.47		
THD+N	Total harmonic distortion plus noise	$V_{O(PP)} = 20\text{ V}$ , $R_L = 2\text{ k}\Omega$ , $A_{VD} = 10$ , $f = 10\text{ kHz}$		0.01		%
$B_1$	Unity-gain bandwidth	$R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$		6		MHz
	Gain-bandwidth product	$R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $f = 100\text{ kHz}$		5.9		MHz
BOM	Maximum output-swing bandwidth	$V_{O(PP)} = 20\text{ V}$ , $A_{VD} = 1$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$		668		kHz
$\phi_m$	Phase margin at unity gain	$R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$		58		$^\circ$



## TYPICAL CHARACTERISTICS

**Table of Graphs**

$V_{IO}$	Input offset voltage	Distribution	<a href="#">Figure 1</a>
$I_{IO}$	Input offset current	vs Free-air temperature	<a href="#">Figure 2</a>
$I_{IB}$	Input bias current	vs Common-mode input voltage	<a href="#">Figure 3</a>
		vs Free-air temperature	<a href="#">Figure 4</a>
$V_{OM+}$	Maximum positive peak output voltage	vs Supply voltage	<a href="#">Figure 5</a>
		vs Free-air temperature	<a href="#">Figure 6</a>
		vs Output current	<a href="#">Figure 7</a>
		vs Settling time	<a href="#">Figure 9</a>
$V_{OM-}$	Maximum negative peak output voltage	vs Supply voltage	<a href="#">Figure 5</a>
		vs Free-air temperature	<a href="#">Figure 6</a>
		vs Output current	<a href="#">Figure 8</a>
		vs Settling time	<a href="#">Figure 9</a>
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	<a href="#">Figure 10</a>
$V_{OH}$	High-level output voltage	vs Output current	<a href="#">Figure 11</a>
$V_{OL}$	Low-level output voltage	vs Output current	<a href="#">Figure 12</a>
	Phase shift	vs Frequency	<a href="#">Figure 13</a>
$A_{VD}$	Large-signal differential voltage amplification	vs Frequency	<a href="#">Figure 13</a>
		vs Free-air temperature	<a href="#">Figure 14</a>
$z_o$	Closed-loop output impedance	vs Frequency	<a href="#">Figure 15</a>
$I_{OS}$	Short-circuit output current	vs Free-air temperature	<a href="#">Figure 16</a>
CMRR	Common-mode rejection ratio	vs Frequency	<a href="#">Figure 17</a>
		vs Free-air temperature	<a href="#">Figure 18</a>
$k_{SVR}$	Supply-voltage rejection ratio	vs Frequency	<a href="#">Figure 19</a>
		vs Free-air temperature	<a href="#">Figure 20</a>
$I_{CC}$	Supply current	vs Supply voltage	<a href="#">Figure 21</a>
		vs Free-air temperature	<a href="#">Figure 22</a>
$V_n$	Equivalent input noise voltage	vs Frequency	<a href="#">Figure 23</a>
$V_n$	Input noise voltage	Over a 10-second period	<a href="#">Figure 24</a>
$I_n$	Noise current	vs Frequency	<a href="#">Figure 25</a>
THD+N	Total harmonic distortion plus noise	vs Frequency	<a href="#">Figure 26</a>
SR	Slew rate	vs Free-air temperature	<a href="#">Figure 27</a>
		vs Load capacitance	<a href="#">Figure 28</a>
	Pulse response	Noninverting large signal	<a href="#">Figure 29</a>
		Inverting large signal	<a href="#">Figure 30</a>
		Small signal	<a href="#">Figure 31</a>
$B_1$	Unity-gain bandwidth	vs Load capacitance	<a href="#">Figure 32</a>
	Gain margin	vs Load capacitance	<a href="#">Figure 33</a>
$\phi_m$	Phase margin	vs Load capacitance	<a href="#">Figure 34</a>

**TLE2142  
DISTRIBUTION OF  
INPUT OFFSET VOLTAGE**

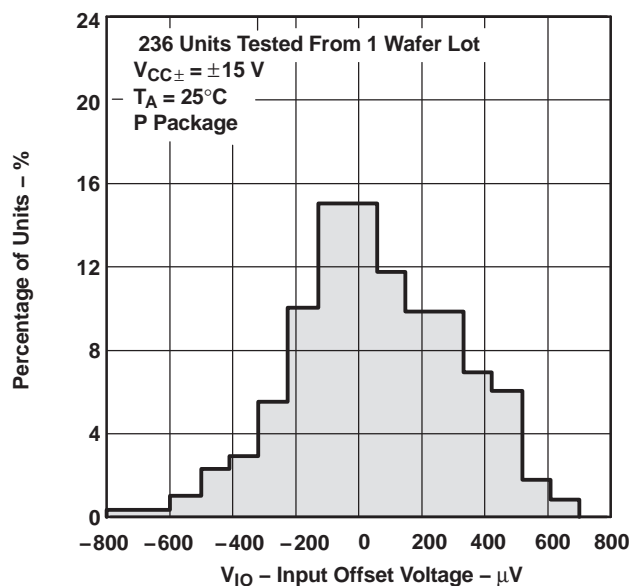


Figure 1.

**INPUT OFFSET CURRENT  
vs  
FREE-AIR TEMPERATURE**

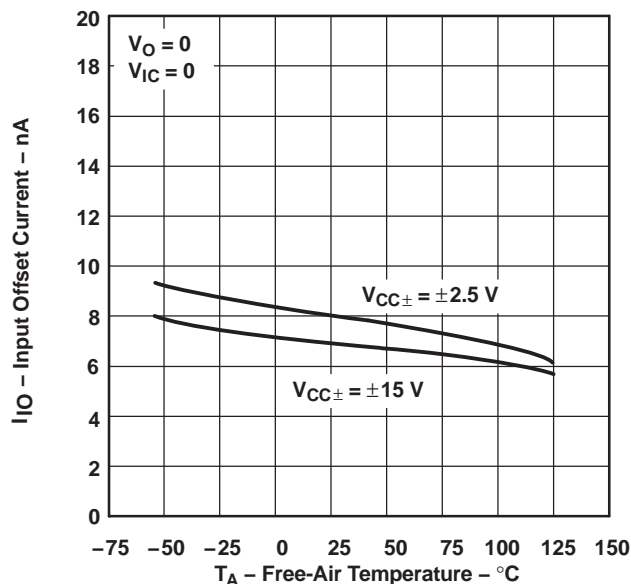


Figure 2.

**INPUT BIAS CURRENT  
vs  
COMMON-MODE INPUT VOLTAGE**

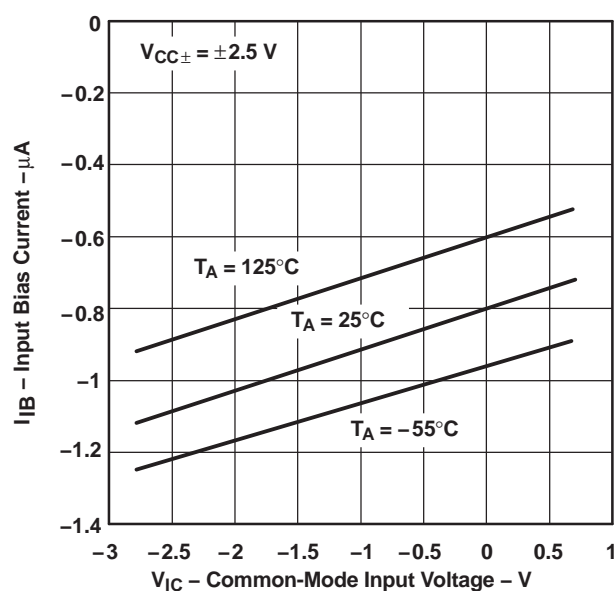


Figure 3.

**INPUT BIAS CURRENT  
vs  
FREE-AIR TEMPERATURE**

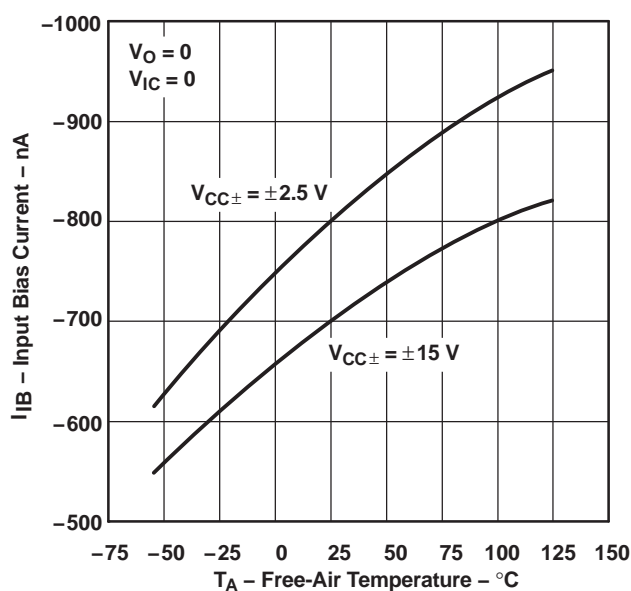


Figure 4.

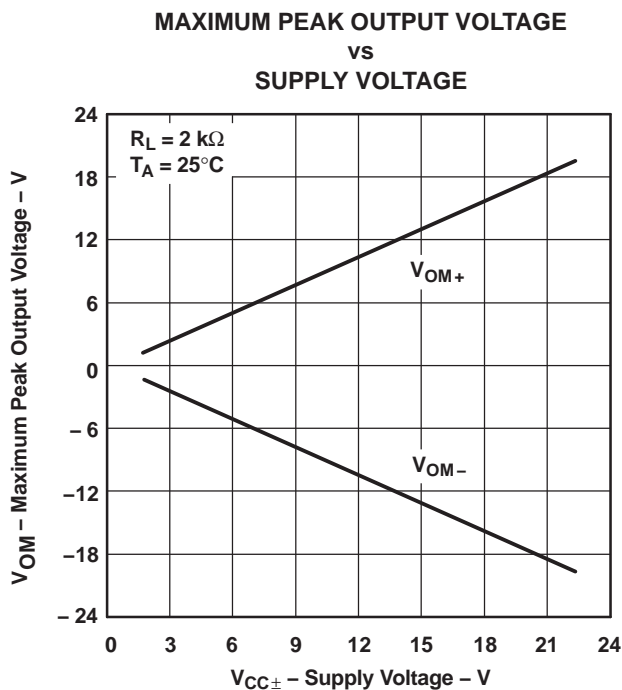


Figure 5.

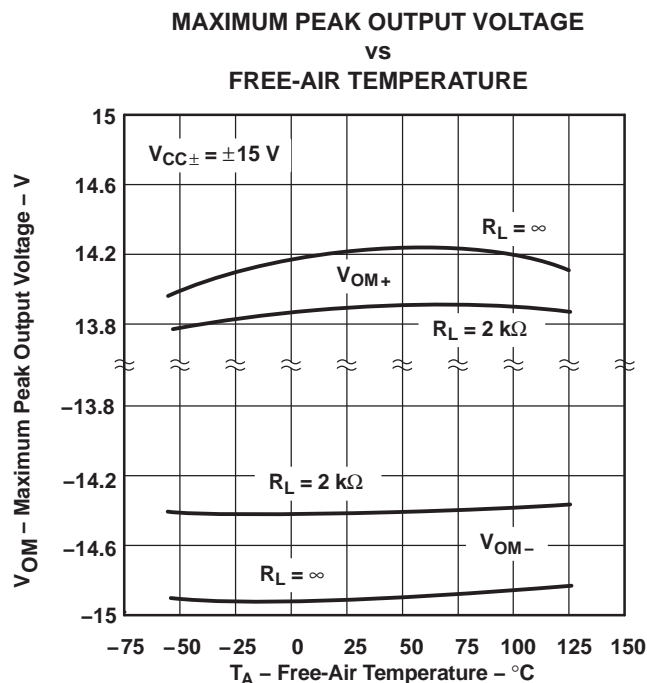


Figure 6.

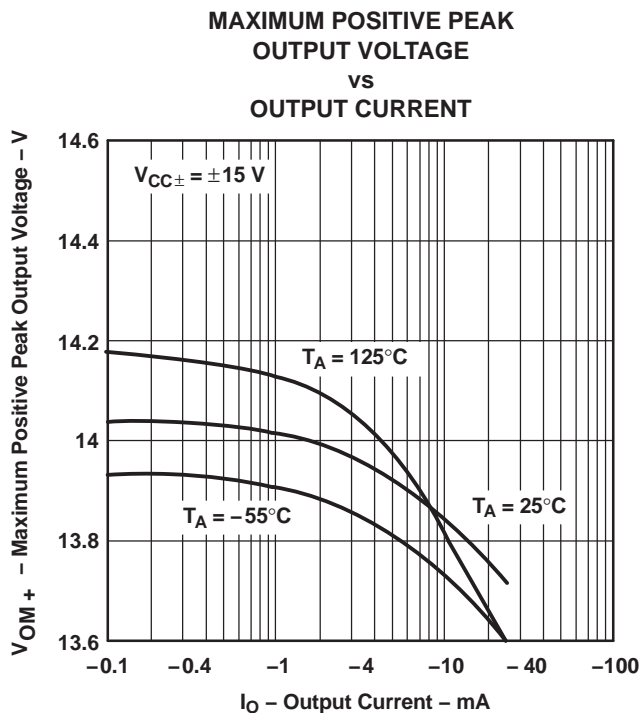


Figure 7.

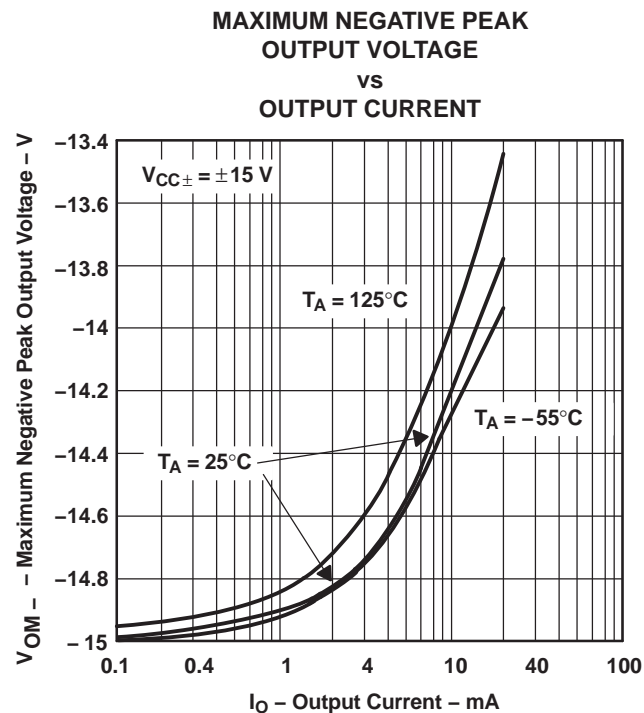


Figure 8.

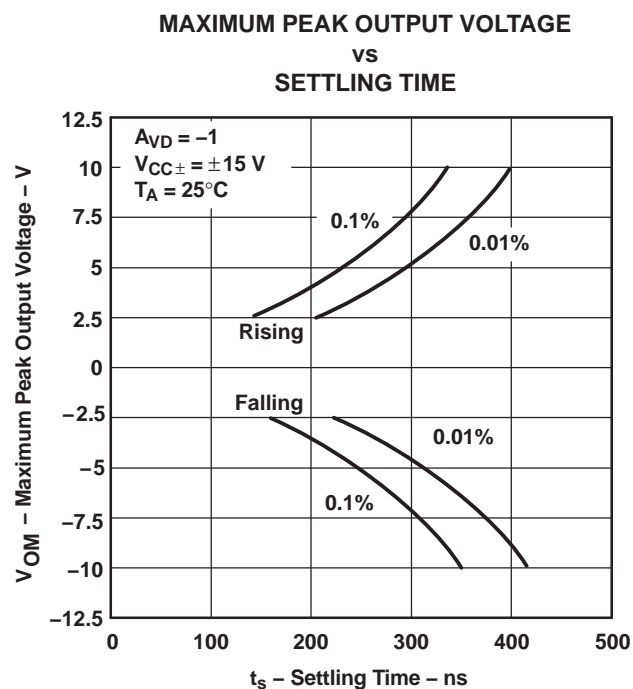


Figure 9.

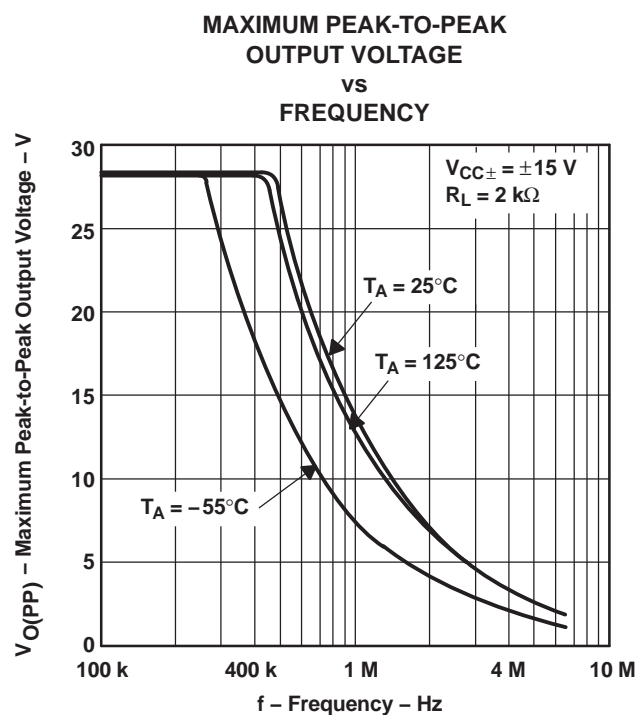


Figure 10.

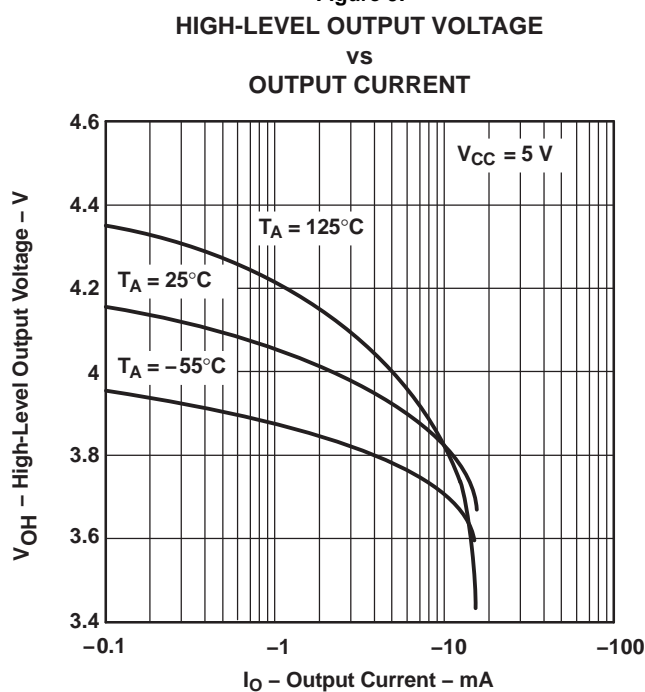


Figure 11.

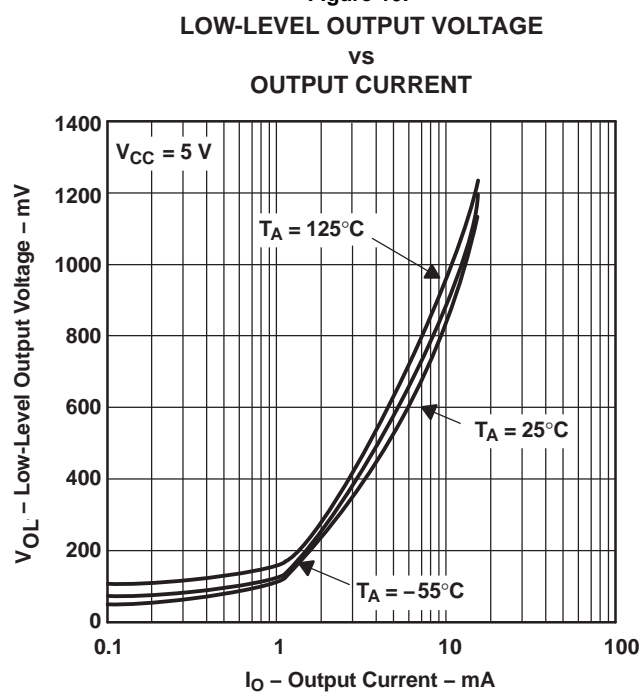


Figure 12.

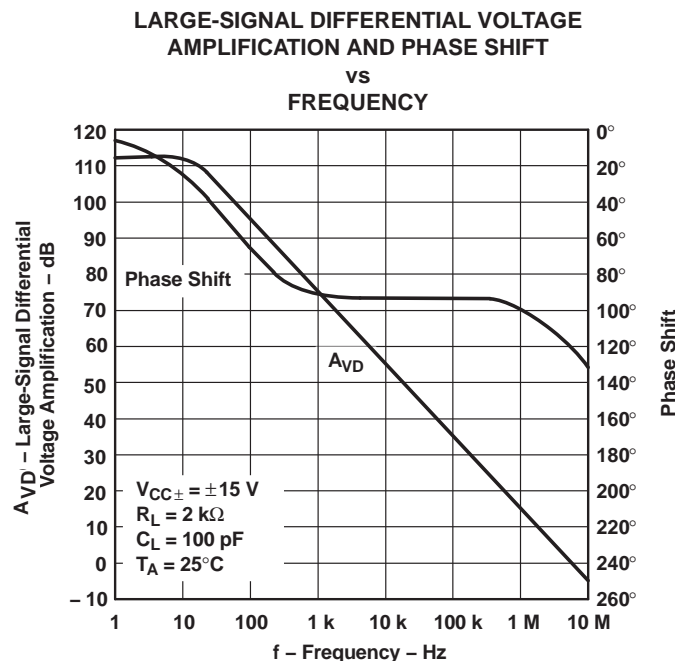


Figure 13.

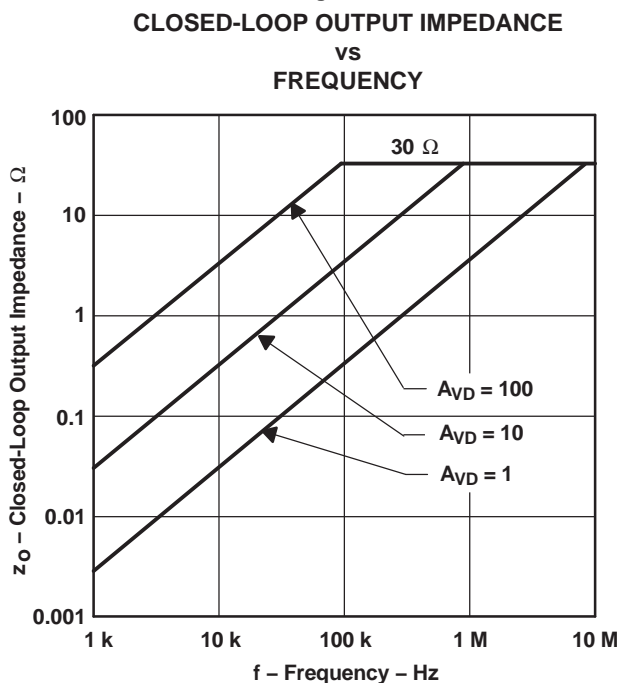


Figure 15.

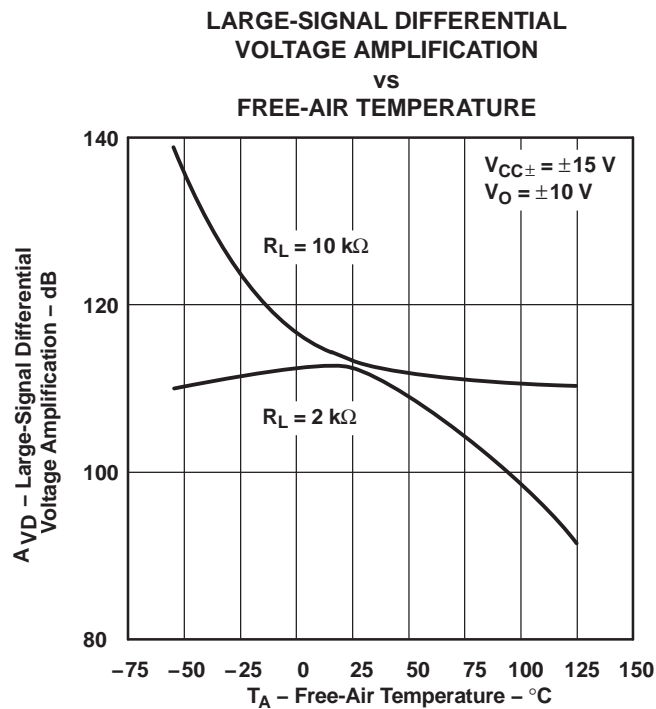


Figure 14.

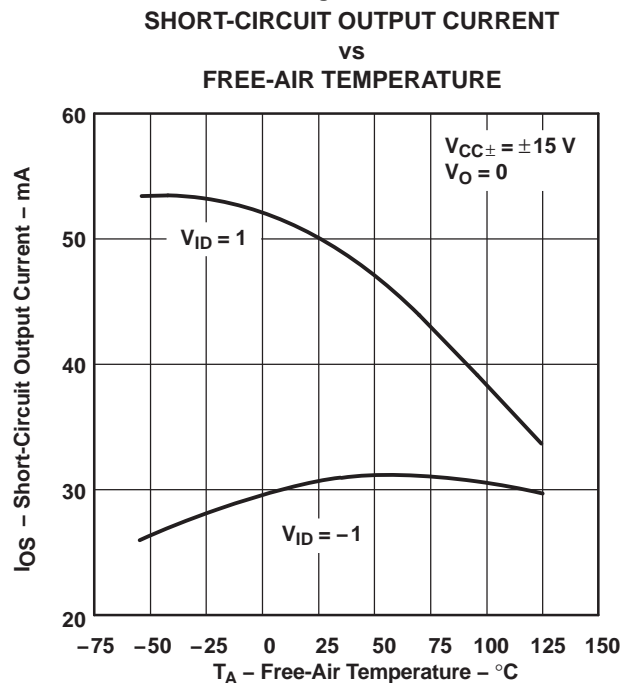


Figure 16.

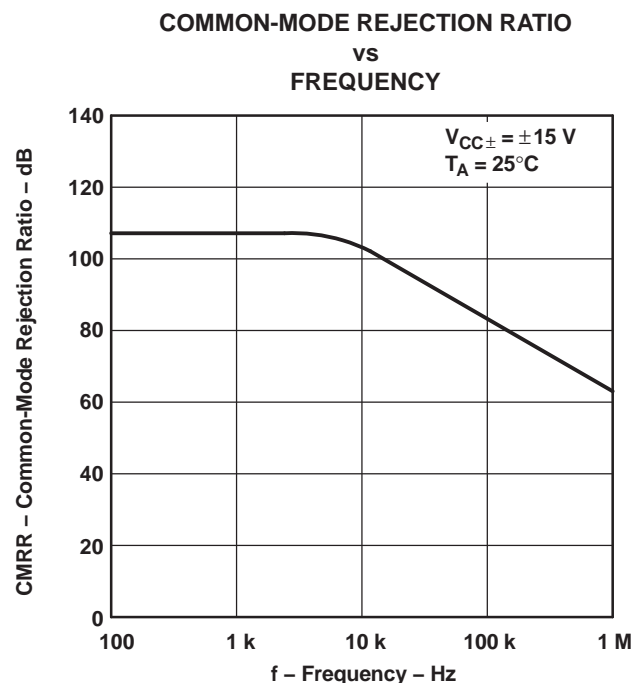


Figure 17.

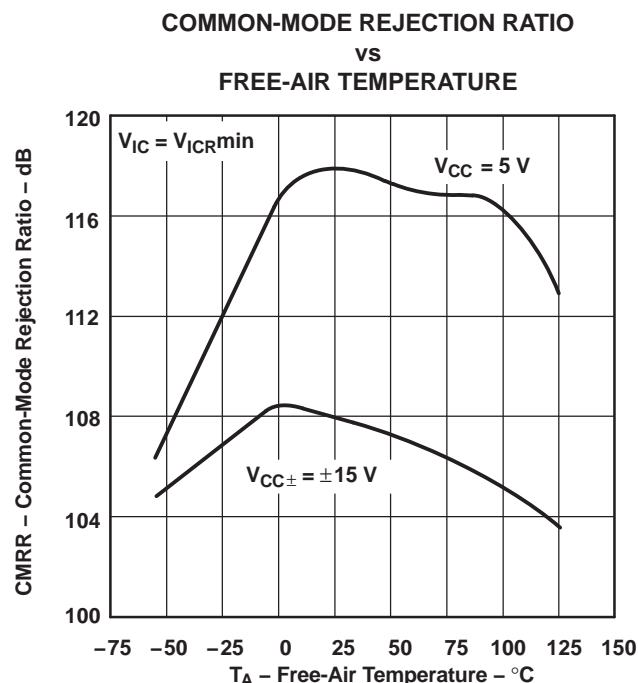


Figure 18.

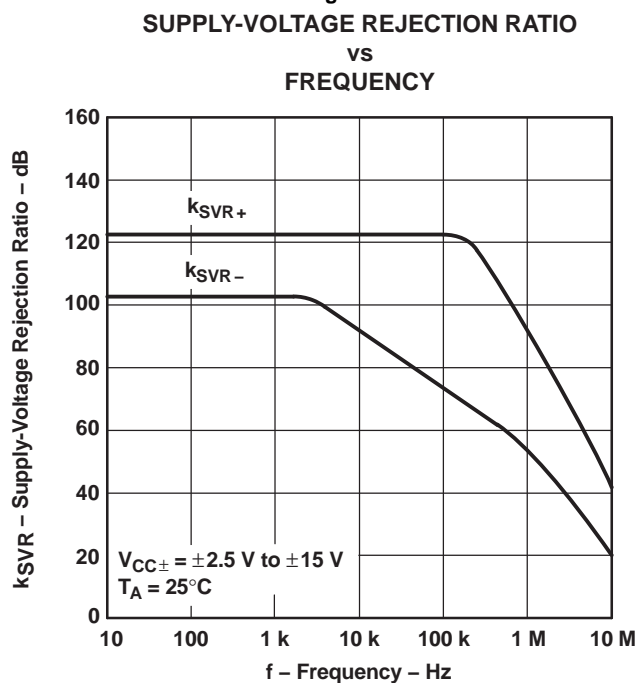


Figure 19.

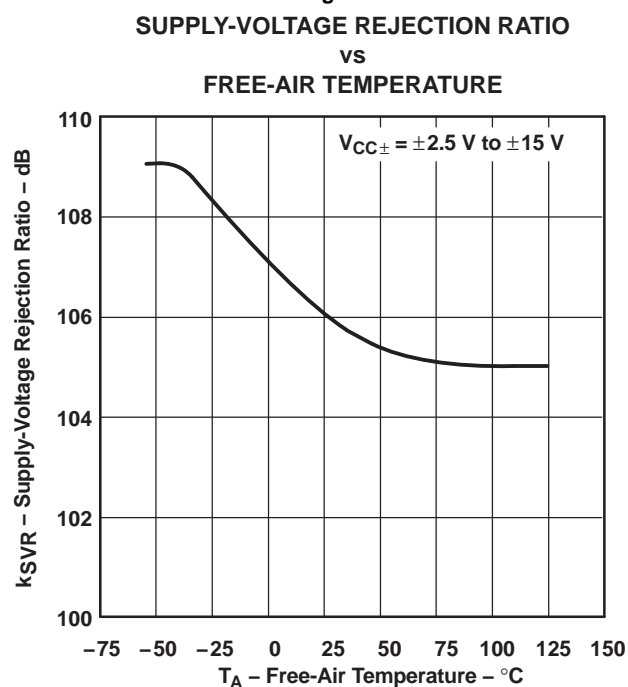
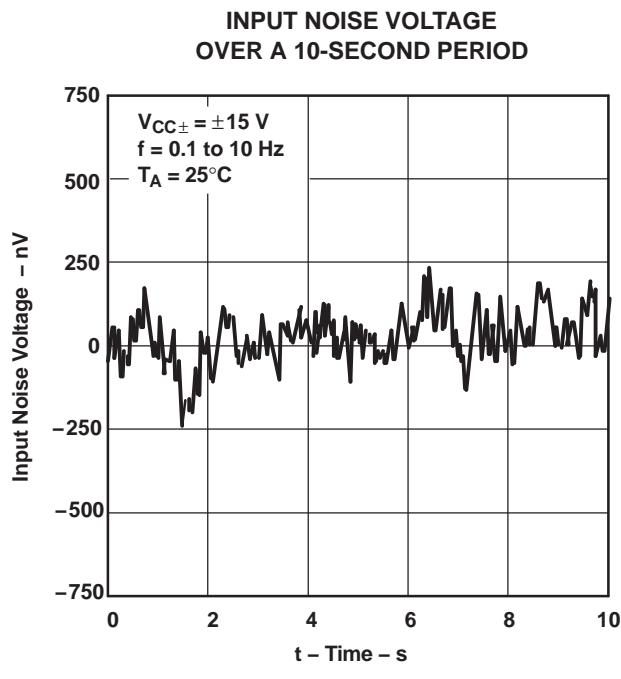
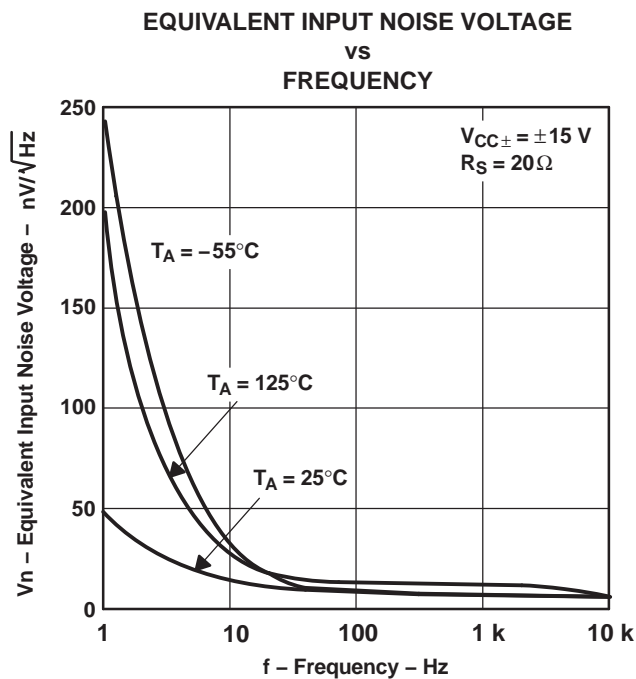
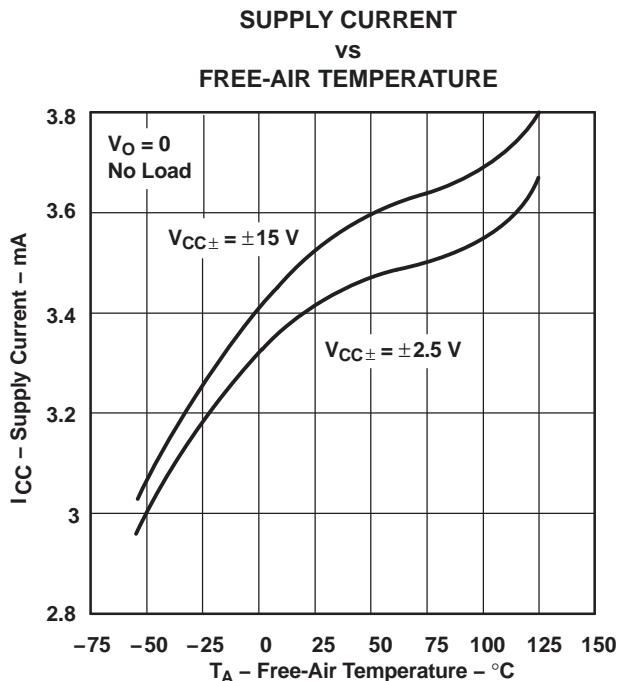
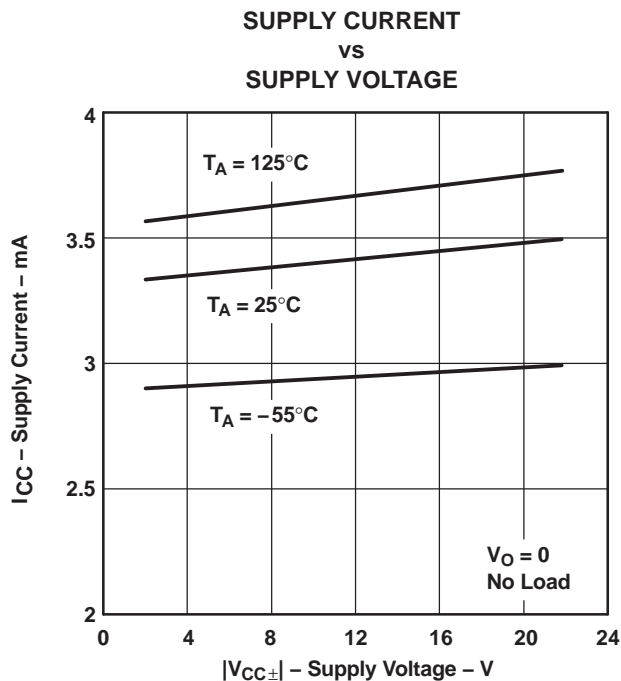


Figure 20.



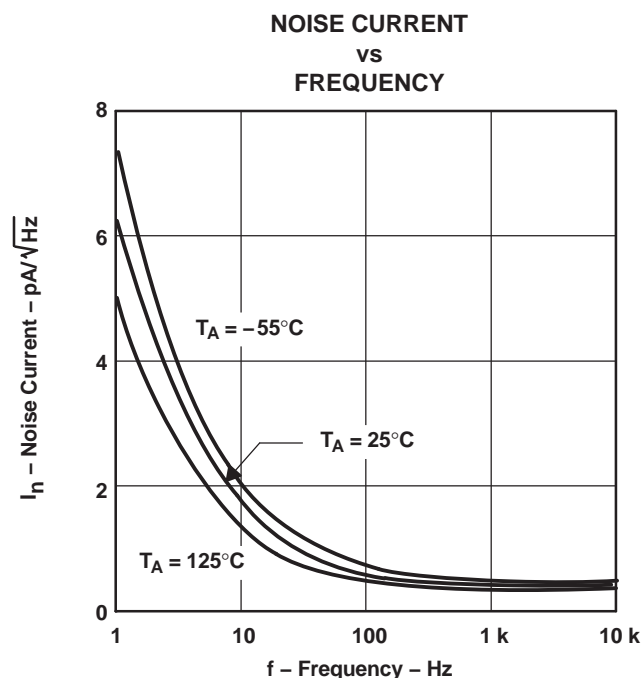


Figure 25.

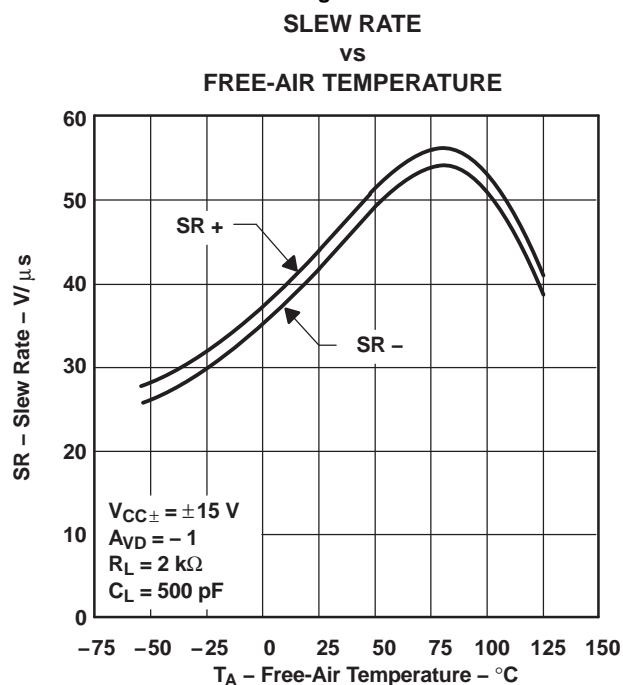


Figure 27.

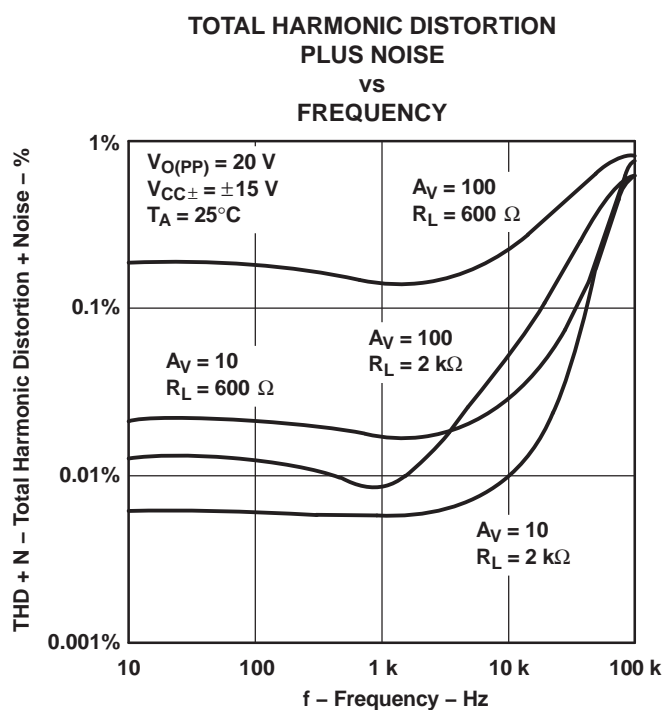


Figure 26.

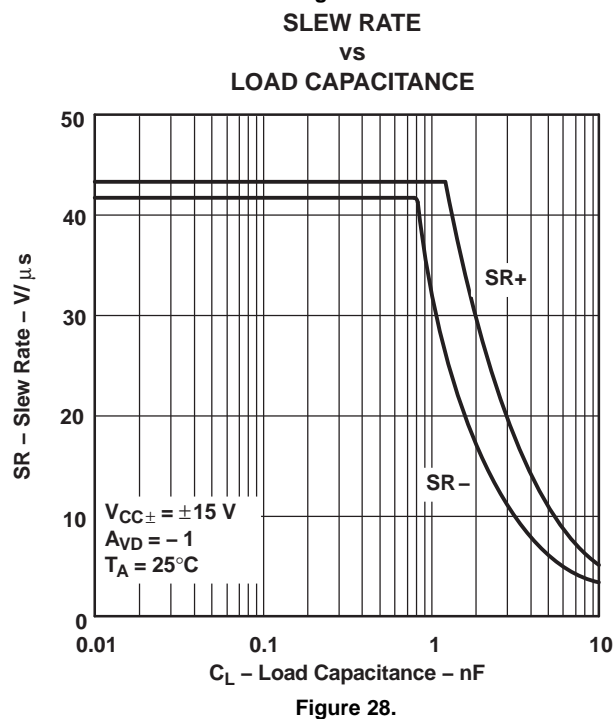
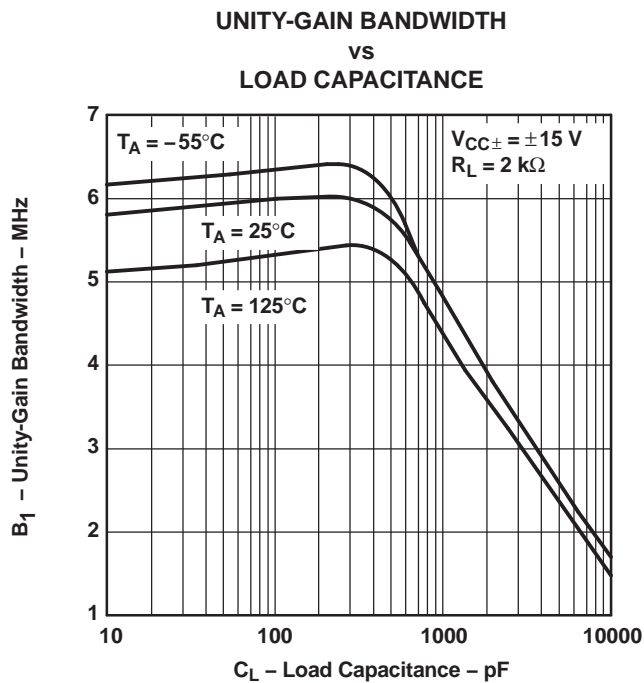
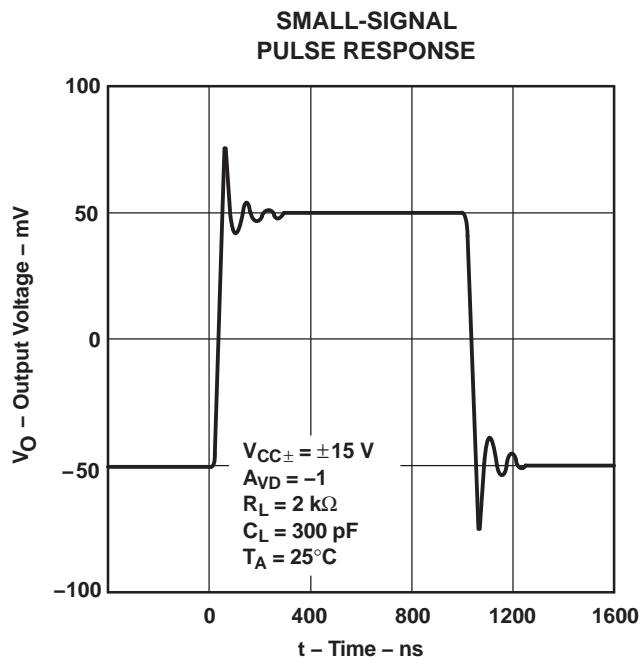
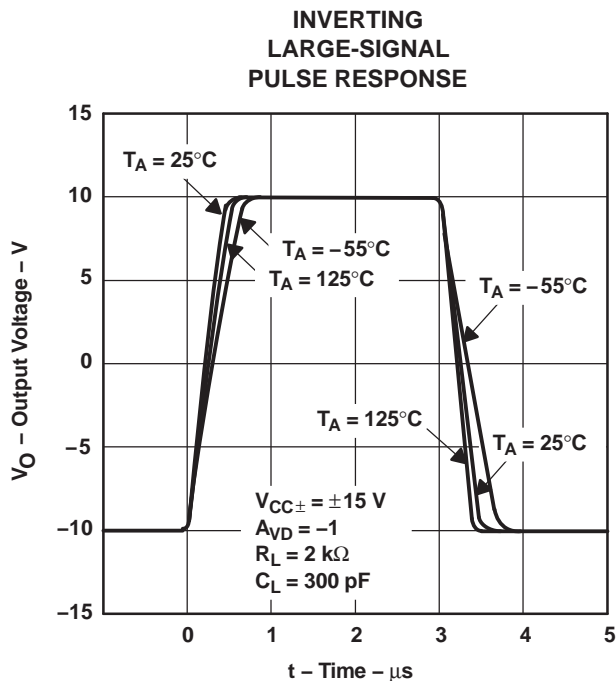
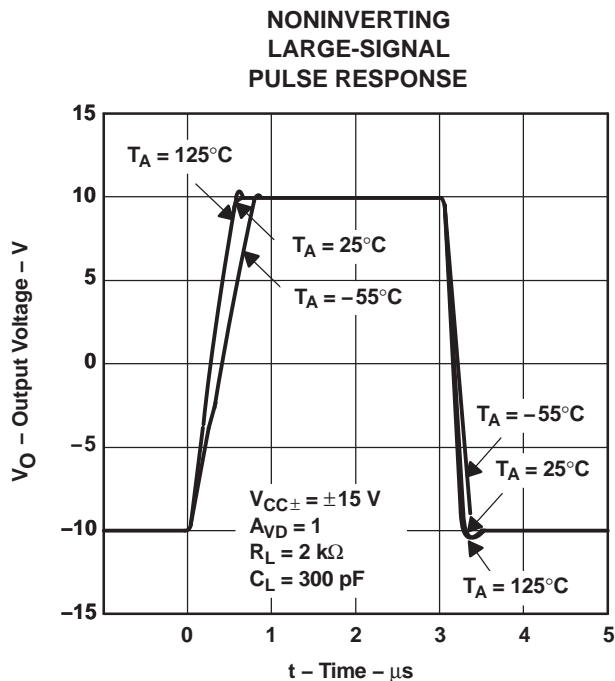


Figure 28.





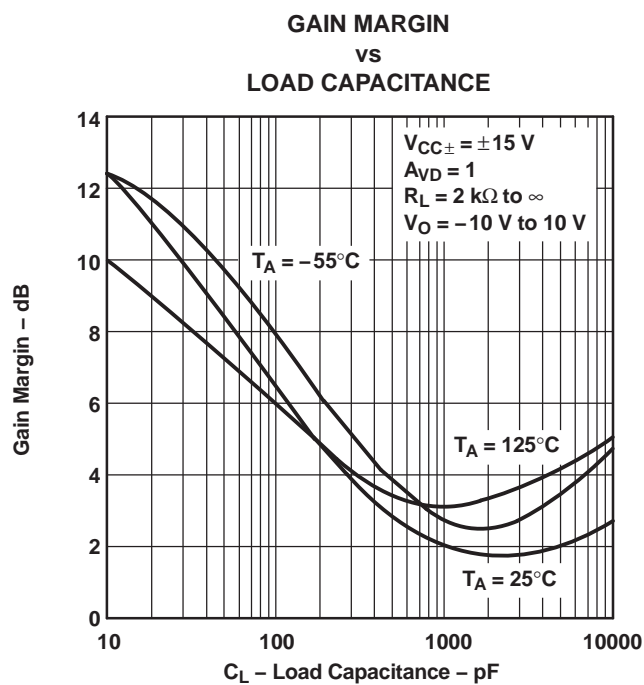


Figure 33.

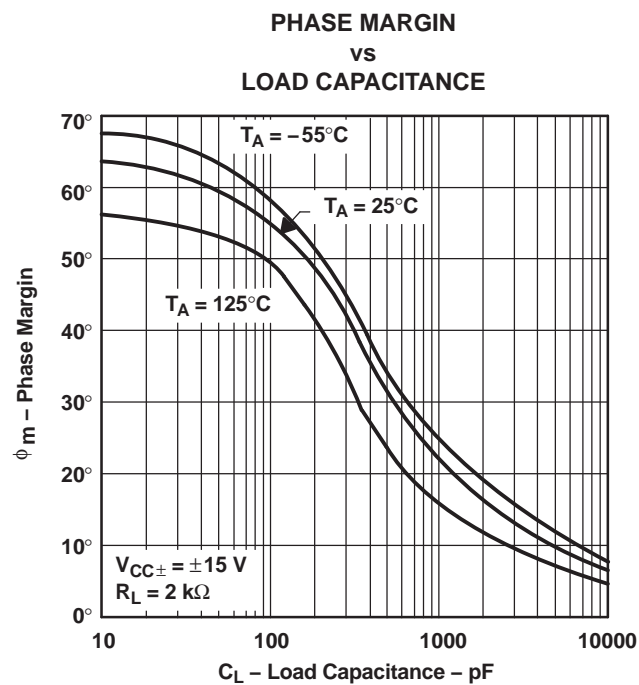


Figure 34.

## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TLE2142QDRQ1	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2142Q	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLE2142-Q1 :**

- Catalog: [TLE2142](#)
- Military: [TLE2142M](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLE2142QDRQ1	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLE2142QDRQ1	SOIC	D	8	2500	340.5	336.1	25.0



## PACKAGE OUTLINE

### SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

**D0008A**

### SOIC - 1.75 mm max height

## SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Precision Amplifiers](#) category:*

*Click to view products by [Texas Instruments](#) manufacturer:*

Other Similar products are found below :

[ADA4692-4ARUZ-RL](#) [RS8654XP](#) [LTC6362IDD#TRPBF](#) [AD8627AKSZ-REEL](#) [TLC27L9CDR](#) [OPA2140AIDRGR](#) [OPA4186DR](#)  
[MCP6V54-E/SL](#) [OP07CP\(LX\)](#) [CBM8606AWS8](#) [MCP6V91UT-E/LTY](#) [LTC2057HS8#TRPBF](#) [AD8662ARZ-REEL](#) [OPA277UA\(UMW\)](#)  
[HG8552CMM/TR](#) [TSZ122IYDT\(UMW\)](#) [TSZ122IDT\(UMW\)](#) [LTC8552-TP](#) [OPA2330AIDR-TP](#) [TPV2376S8](#) [OPA2336UA-TP](#)  
[OPA2376AIDR-TP](#) [TPSGM8552XS8G](#) [AD8538ARZ\(UMW\)](#) [OPA2333AIDR-TP](#) [OPA2317IDR-TP](#) [OPA2330AIDR\(UMW\)](#)  
[OPA2333AIDR\(XBLW\)](#) [AD8552ARZ\(XBLW\)](#) [OP177FN](#) [AD8554ARZ-MS](#) [OP2177ARZ\(UMW\)](#) [AD8630ARZ-MS](#) [SL8582XS8](#)  
[LTC2051IMS8#TRPBF](#) [ADA4610-2ARZ-RL](#) [LTC2054HVCS5#TRPBF](#) [CI823B](#) [ADA4610-1BRZ-R7](#) [OPA4189IPWR](#) [LT6233IS6-](#)  
[10#TRPBF](#) [OPA2328DR](#) [MCP60721UT-E/LTY](#) [MCP60721T-E/OT](#) [TLC27L7CP](#) [LT1014DDWR](#) [TLV4376IPWR](#) [5962-9088106Q2A](#)  
[LMP2234AMTE/NOPB](#) [LMP2231AMFE/NOPB](#)