


# Wi-Fi Shutter Controller

## Description



Wi-Fi Shutter Controller is – as the name suggests – an intelligent shutter controller. You can control it using [WiseWave](#) app as well as via inputs marked as **I1** i **I2** , which allow you to expand or roll up the shutter.

## Schematics

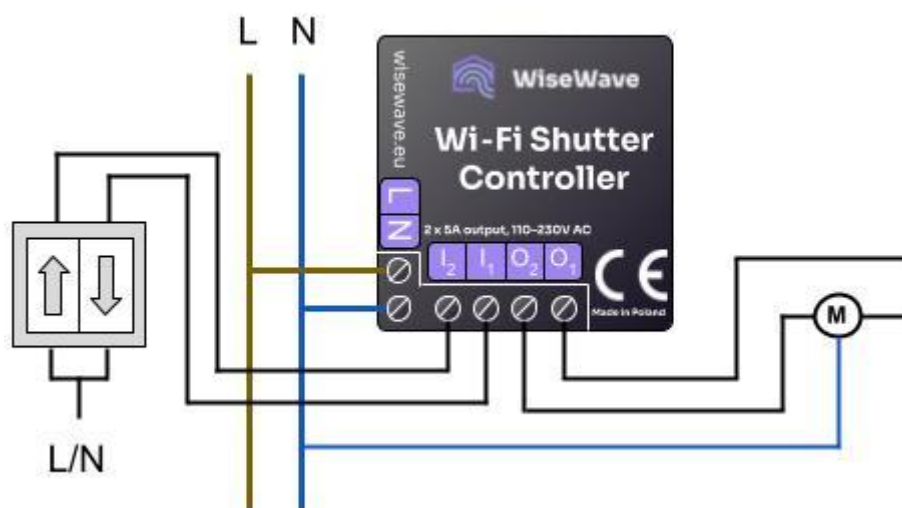

# Technical Specification

Description	Value
Input voltage	110 - 230 VAC
Power consumption	<1W
Type of outputs	Switch
Output voltage	Same as input voltage (110 - 230 VAC)
Max. output current	5 A
Number of inputs	2
Type of inputs	Monostable (like doorbell)
Control signal	L or N
Wi-Fi	802.11 b/g/n (2.4 GHz)
Installation method	flush-mounted box
Length	41.8 mm
Width	41.8 mm
Height	25.5 mm



## Calibrate Shutter

Shutter requires calibration for remote control. Follow instructions described in [Shutter Calibration](#) section

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialist Controllers](#) category:*

*Click to view products by [Vega Elektronik](#) manufacturer:*

Other Similar products are found below :

[CV500SLK21](#) [H2CRSAC110B](#) [R88ARR080100S](#) [E53E01](#) [E53E8C](#) [NT20SST122BV1](#) [C40PEDRA](#) [K31S5](#) [K31S6](#) [K3TX-AD31A](#)  
[L595020](#) [26546803](#) [26546805](#) [CPM1AETL03CH](#) [3G2A5BI081](#) [3G2A5IA122](#) [3G2A5OD211](#) [3G2A5RM001EV1](#) [3G2A5RT002EV1](#)  
[3G2A6-ID217](#) [3G2A6LK202EV1](#) [3G2A9AL004E](#) [C200HETL01E](#) [C200PCPD024](#) [3G2A5AD001](#) [3G2A5BI051](#) [3G2A5IA121](#) [3G2A5ID112](#)  
[3G2A5ID213](#) [3G2A5ID219](#) [3G2A5MR431](#) [3G2A5OC221](#) [3G2A5PS222E](#) [3G2A6IM213](#) [3G2A6-OD412](#) [3G2A9AL001](#) [3G2C7LK202EV1](#)  
[3G5A2OC221E](#) [LDP2TA2B115](#) [E53E04](#) [E53Q4Q4](#) [E54E8CT](#) [N-TC-48](#) [81283501](#) [88981117](#) [CQM1TC304](#) [CQM1TC302](#) [CQM1TC203](#)  
[CPM1ETL02CH](#) [CPM1ETL01CH](#)