




General Description

The LM358 series consists of two independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.


Application areas include transducer amplifiers, dc gain blocks and all the conventional op amp circuits which now can be more easily implemented in single power supply systems. For example, the LM358 series can be directly operated off of the standard +5V power supply voltage which is used in digital systems and will easily provide the required interface electronics without requiring the additional ±15V power supplies.

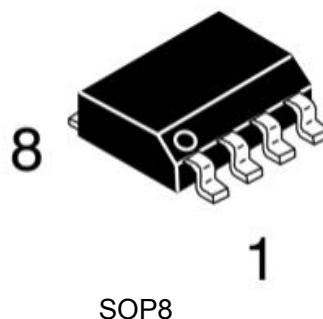

Features

- Wide power supply range:
 - Single supply: 4V to 32V
 - or dual supplies: ±2V to ±16V
- Very low supply current drain (500 µA)—essentially independent of supply voltage
- Wide bandwidth (unity gain): 1 MHz
- Low Input Bias Currents
- Common Mode Range Extends to Negative Supply

PIN CONNECTIONS

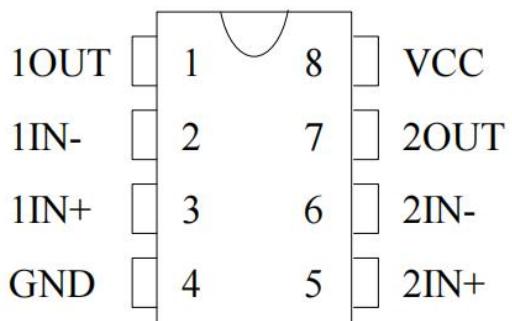


Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW LM358DR2G	SOP-8	LM358	Tape	2500Pcs/Reel



Schematic Diagram (One-Half of Circuit Shown)

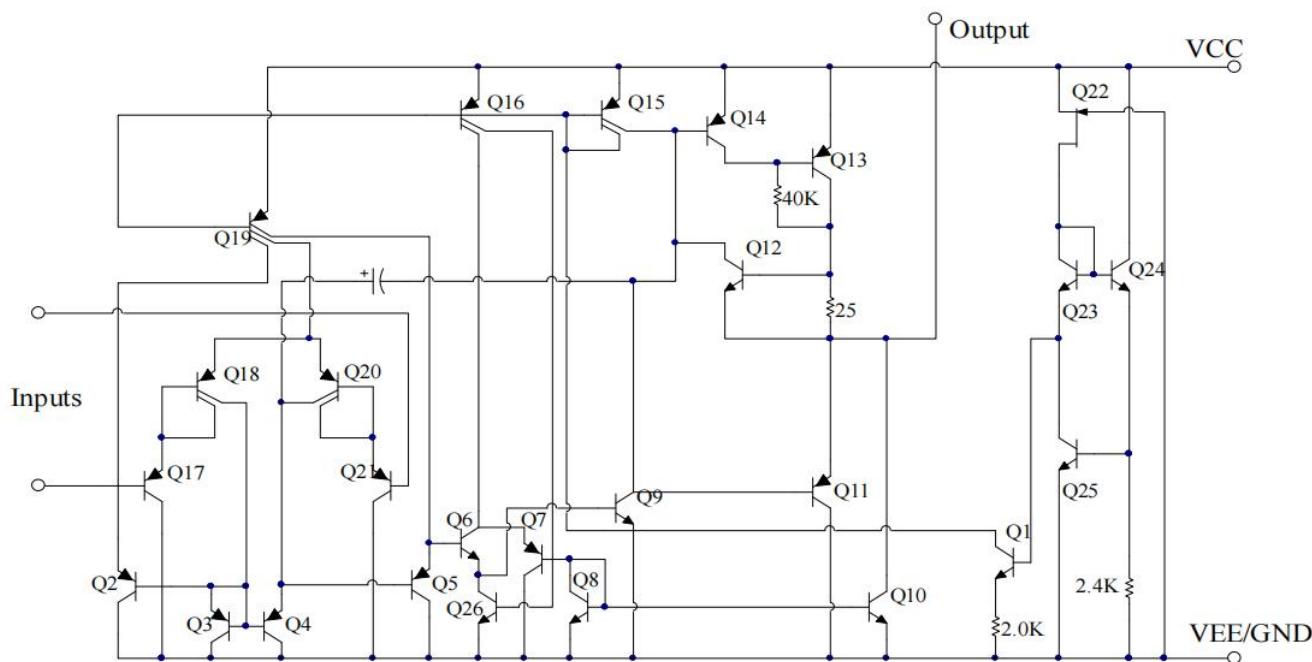

MAXIMUM RATINGS(TA = +25°C, unless otherwise noted.)

Rating		Value	Unit
Power Supply Voltages		32 or ± 16	V
Input Differential Voltage Range		32	V
Input Common Mode Voltage Range		-0.3 ~ VCC	V
Power Dissipation (Note1)	DIP8	830	mW
	SOP8	530	
Output Short Circuit Duration (V≤15V, Ta=25°C)		Continuous	
Input Current (VIN<-0.3V)		50	mA
Junction Temperature		150	°C
Operating Temperature Range		0 ~ 70	°C
Storage Temperature Range		-65 ~ 150	°C

Note1 : LM358 must be derated based on a +150°C maximum junction temperature.




ELECTRICAL CHARACTERISTICS


(Vcc=5.0V, TA = +25 °C, unless otherwise noted.)

Parameter	Conditions	LM358			Units	
		Min	Typ	Max		
Input Offset Voltage	Ta=25°C, VCC = 5.0 V to 30 V, VO = 1.4 V,		2	5	mV	
Input Bias Current	Ta=25°C IIN(+)或 IIN (-), VCM=0V ,		45	250	nA	
Input Offset Current	Ta=25°C IIN(+) - IIN (-), VCM=0V ,		3	50	nA	
Input Common Mode Voltage Range	Ta=25°C V+=30V ,	0		Vcc -1.5	V	
Power Supply Current	RL=∞, Total Device	Vcc =30V		1	2	mA
		Vcc =5V		0.5	1.2	mA
Large Signal Open Loop Voltage Gain	Vcc =15V , Ta=25°C, RL≥2kΩ (for Vo=1~11V)	25	100		V/mV	
Common Mode Rejection	DC , Ta=25°C, VCM=0~Vcc-1.5V	65	90		dB	
Power Supply Rejection	DC , Ta=25°C, Vcc =5~30V	65	100		dB	
Output Source Current	VIN(+)=1V,VIN(-)=0V,Vcc=15V,Vo=2V,Ta=25°C	20	40		mA	
Output Sink Current	VIN(-)=1V,VIN(+)=0V,Vcc=15V,Vo=2V,Ta=25°C	10	15		mA	
	VIN(-)=1V,VIN(+)=0V,Vcc=15V,Vo=200mV, Ta=25°C	12	50		μA	
Output Short Circuit to Ground	Vcc=15V , Ta=25°C		40	60	mA	
Output Voltage Swing	VOH	Vcc=30V	RL=2kΩ	26		V
		Vcc=30V	RL=10kΩ	27	28	V
	VOL	Vcc=5V , RL=10kΩ		5	20	mV


Typical Applications

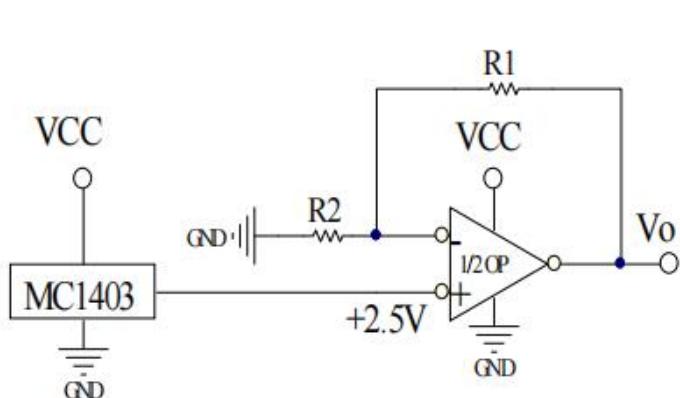


Voltage Reference, $Vo=2.5V \cdot (1+R_1/R_2)$

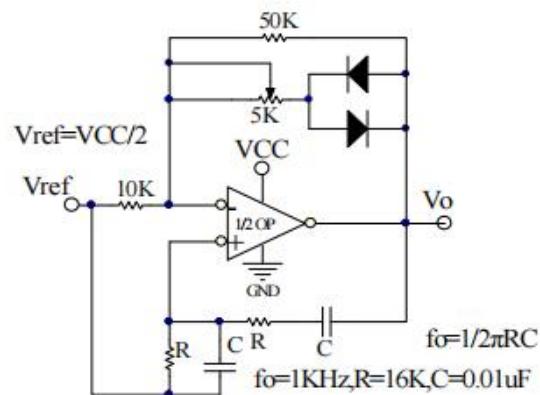


Wien Bridge Oscillator

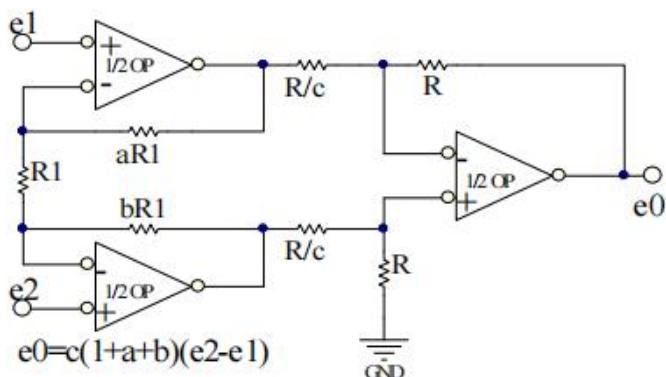


High Impedance Differential Amplifier

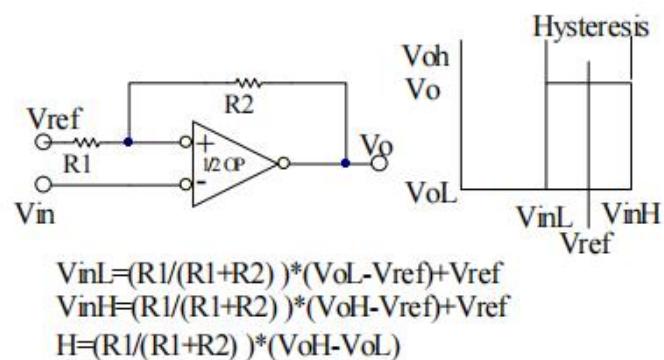

Comparator with Hysteresis

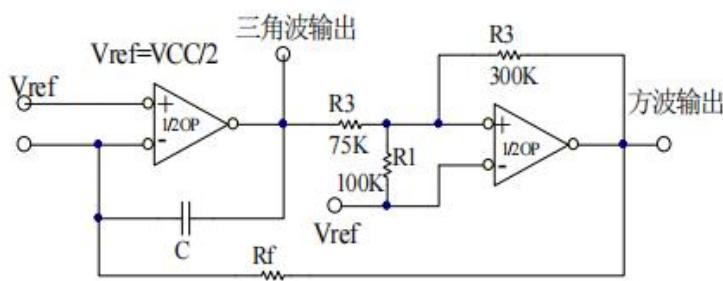

Function Generator

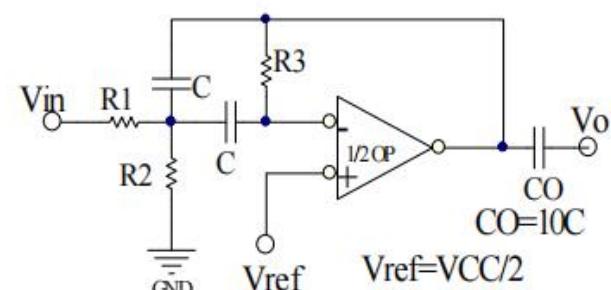


$f_o = \text{center frequency}$


Multiple Feedback Bandpass Filter




Typical Performance Characteristics

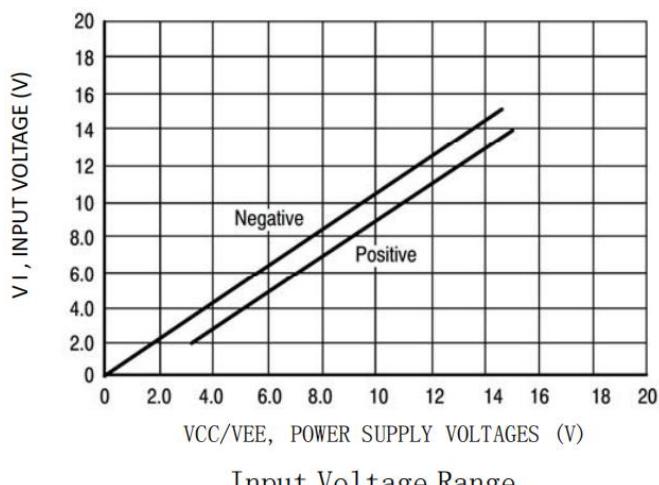


Input Voltage Range

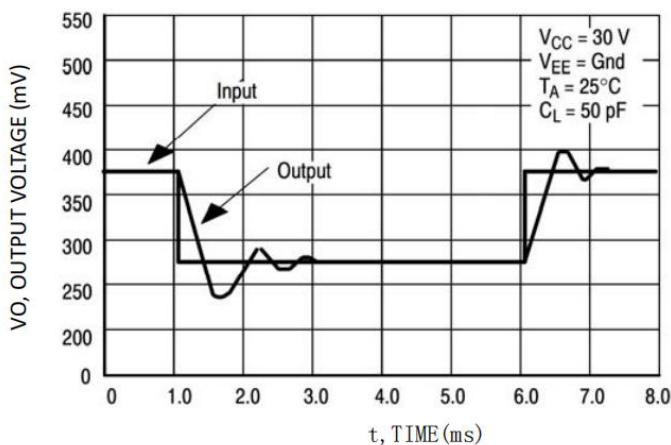

Small Signal Voltage Follower Pulse Response
(Noninverting)

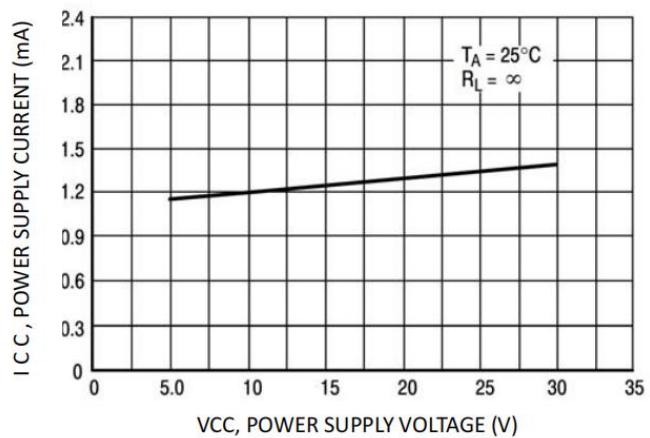

Power Supply Current versus Power Supply Voltage

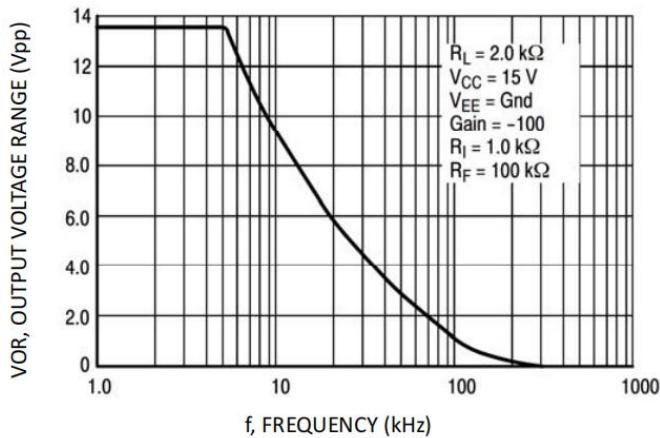


Large-Signal Frequency Response



Package Information

SOP8

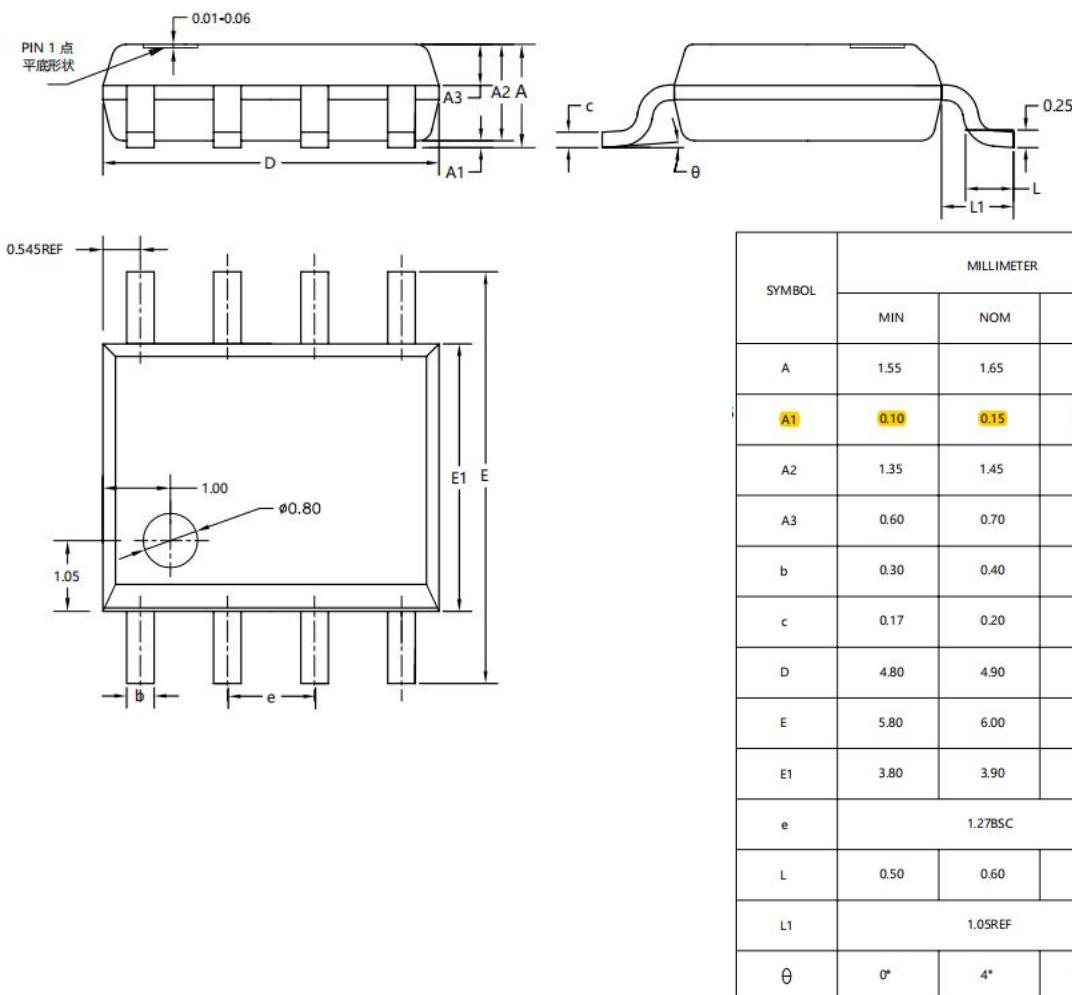

Statement:

- ◇ Shenzhen xinbole electronics co., ltd. reserves the right to change the product specifications, without notice! Before placing an order, the customer needs to confirm whether the information obtained is the latest version, and verify the integrity of the relevant information.
- ◇ Any semiconductor product is liable to fail or malfunction under certain conditions, and the buyer shall be responsible for complying with safety standards in the system design and whole machine manufacturing using Shenzhen xinbole electronics co., ltd products, and take appropriate security measures to avoid the potential risk of failure may result in personal injury or property losses of the situation occurred!
- ◇ This document is for referenceonly, and the actual use should be based on the application test results.
- ◇ Product performance is never ending, Shenzhen xinbole electronics co., ltd will be dedicated to provide customers with better performance, better quality of integrated circuit products.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by XBLW manufacturer:

Other Similar products are found below :

[430227FB](#) [LT1678IS8](#) [058184EB](#) [NCV33202DMR2G](#) [NJM324E](#) [M38510/13101BPA](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#)
[AZV358MMTR-G1](#) [SCY33178DR2G](#) [NCV20034DR2G](#) [NTE778S](#) [NTE871](#) [NTE937](#) [NJU7057RB1-TE2](#) [SCY6358ADR2G](#)
[NJM2904CRB1-TE1](#) [UPC4570G2-E1-A](#) [UPC4741G2-E1-A](#) [UPC4574GR-9LG-E1-A](#) [NJM8532RB1-TE1](#) [EL2250CS](#) [EL5100IS](#) [EL5104IS](#)
[EL5127CY](#) [EL5127CYZ](#) [EL5133IW](#) [EL5152IS](#) [EL5156IS](#) [EL5162IS](#) [EL5202IY](#) [EL5203IY](#) [EL5204IY](#) [EL5210CS](#) [EL5210CYZ](#)
[EL5211IYE](#) [EL5220CY](#) [EL5223CLZ](#) [EL5223CR](#) [EL5224ILZ](#) [EL5227CLZ](#) [EL5227CRZ](#) [EL5244CS](#) [EL5246CS](#) [EL5246CSZ](#) [EL5250IY](#)
[EL5251IS](#) [EL5257IS](#) [EL5260IY](#)