


# INFRARED EMITTING DIODES

FOR HIGH-VOLUME APPLICATIONS

## PULSED LASER DIODES AND INFRARED LEDs (IREDS) ■

Infrared Emitting Diodes (IREDs) VTE

### Infrared Emitting Diodes (IREDs) – VTE

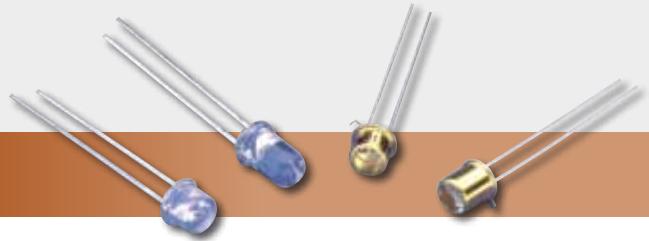

#### Applications

- Consumer coin readers
- Lottery card readers
- Position sensors – joysticks
- Safety shields
- Encoders – measure speed and direction
- Printers – margin control
- Copiers – monitor paper position or paper stack height

#### Features and Benefits

- End and side radiating configurations
- Selection of emission angle spread using molded lenses
- Narrow band of emitted wavelengths
- Minimal heat generation
- Low power consumption

#### Product Description

IREDs are solid state light sources emitting in the near infrared part of the spectrum. The emission wavelength is closely matched to the response peak of silicon photodiodes and phototransistors. The product line provides a broad range of mounting lens and power output options. Both end and side radiating cases are available. Wide arrays of emission beam profiles are available. Devices may be operated in either CW or pulsed operating modes.





IREDs can be combined with Excelitas detectors or phototransistors in integrated assemblies for optoisolators, optical switches and retro sensors. Optical isolators are useful when electrical isolation is required, for example to transmit control logic signals to high power switching circuits (which can be noisy). In an optical switch an object is detected when it passes between the IRED and detector/phototransistor, for example a coin counter. In a retro sensor an object is detected when the IRED emitted beam is reflected onto the detector/photodetector. The retro sensor is used in applications where the object changes the reflectance, for example detecting the end of a ply wood sheet or other manufactured material.

Our core competencies include: LPE wafer growth; wafer processing of the grown GaAs wafers; assembly using either epoxy die attach; epoxy encapsulation of the IRED LEDs on lead frame; hermetically sealed package.

Product Table

#### Infrared Emitting Diodes (IREDs) – VTE

Part Number	Package	Irradiance	Distance	Diameter	Radiant Intensity	Total Peak Power	Forward Test Current	Forward Voltage Drop	Max Pulsed Forward Current	Wavelength	Beam Angle FWHM
Symbol		E <sub>t</sub> typ.	mW/cm <sup>2</sup>	mm	mm	mW/sr	mW	mA	V <sub>f</sub> max	mA	nm
Unit								V			Degrees
<b>VTE1013H</b>	TO-46	2.7	36	6.4	27	30	1000 •	2.5	3000	940	±35
<b>VTE1063H</b>	TO-46	5.0	36	6.4	49	80	1000 •	3.5	3000	880	±35
<b>VTE1113H</b>	TO-46	15	36	6.4	156	30	1000 •	2.5	3000	940	±10
<b>VTE1291-1H</b>	T-1½ (5 mm)	3.3	36	6.4	32	20	100 •	2.0	2500	880	±12
<b>VTE1291-2H</b>	T-1½ (5 mm)	6.5	36	6.4	65	25	100 •	2.0	2500	880	±12
<b>VTE1291W-1H</b>	T-1½ (5 mm)	1.6	36	6.4	16	20	100 •	2.0	2500	880	±25
<b>VTE1291W-2H</b>	T-1½ (5 mm)	3.3	36	6.4	32	25	100 •	2.0	2500	880	±25
<b>VTE1295H</b>	T-1½ (5 mm)	5.5	36	6.4	39	20	100 •	2.0	2500	880	±8
<b>VTE3322LAH</b>	T-1 (3 mm)	1.3	10.16	2.1	1.0	1.5	20 •	1.6	3000	940	±10
<b>VTE3324LAH</b>	T-1 (3 mm)	2.6	10.16	2.1	2.0	2.5	20 •	1.6	3000	940	±10
<b>VTE7172H</b>	Lateral 4.57x1.65 mm	0.6	16.7	4.6	1.1	2.5	20 •	1.8	2500	880	±25
<b>VTE7173H</b>	Lateral 4.57x1.65 mm	0.8	16.7	4.6	1.7	5.0	20 •	1.8	2500	880	±25
<b>CR10IRD</b>	SMD	-	-	-	-	6.3	50 •	2.05	800	770	-
<b>CR50IRDA</b>	SMD	-	-	-	-	20	50 •	1.8	800	870	±90
<b>CR50IRH</b>	SMD	-	-	-	-	10.6	50 •	1.85	800	870	±90
<b>CR50IRK</b>	SMD	-	-	-	-	11.4	50 •	1.7	800	950	±90

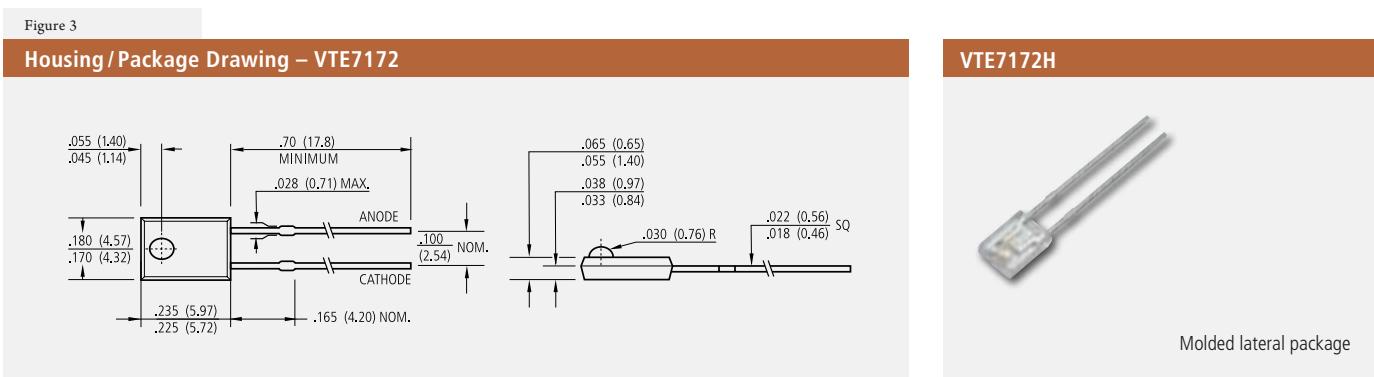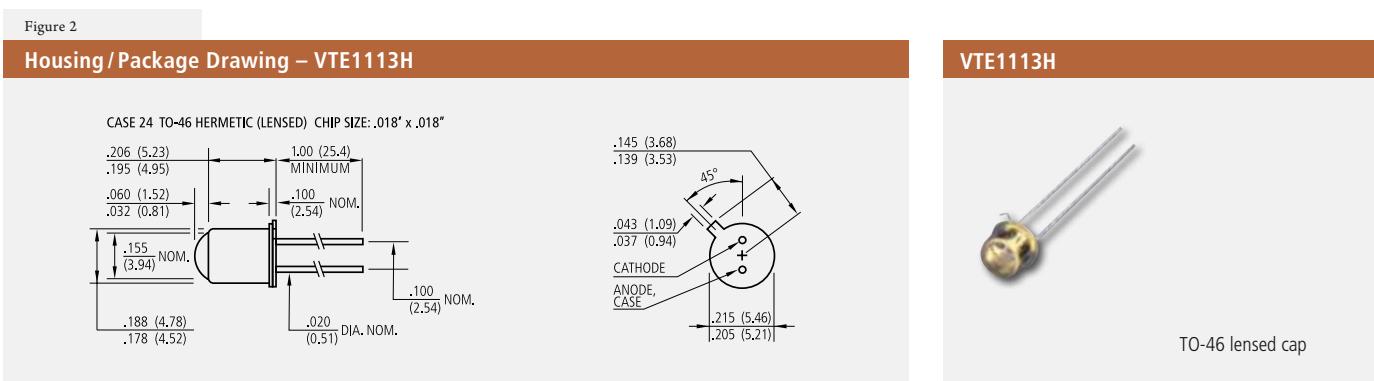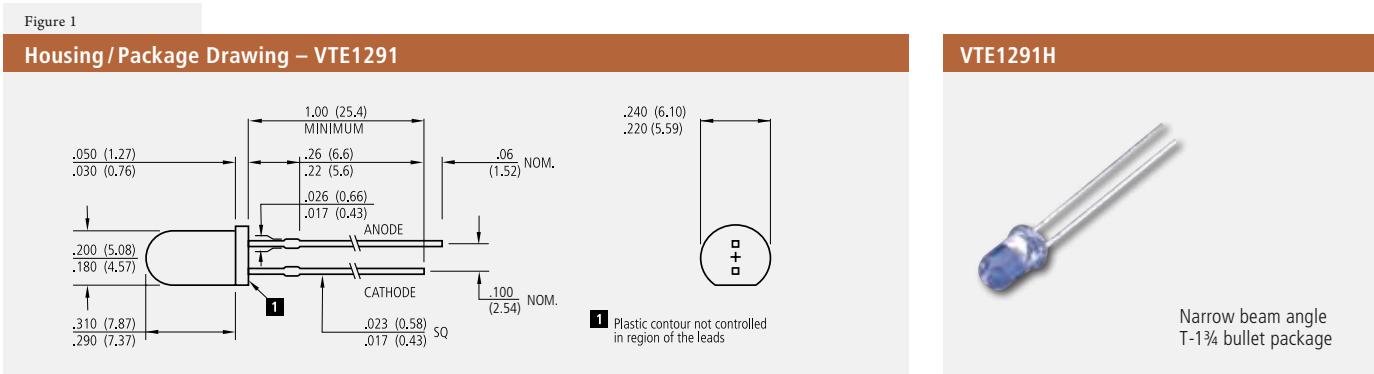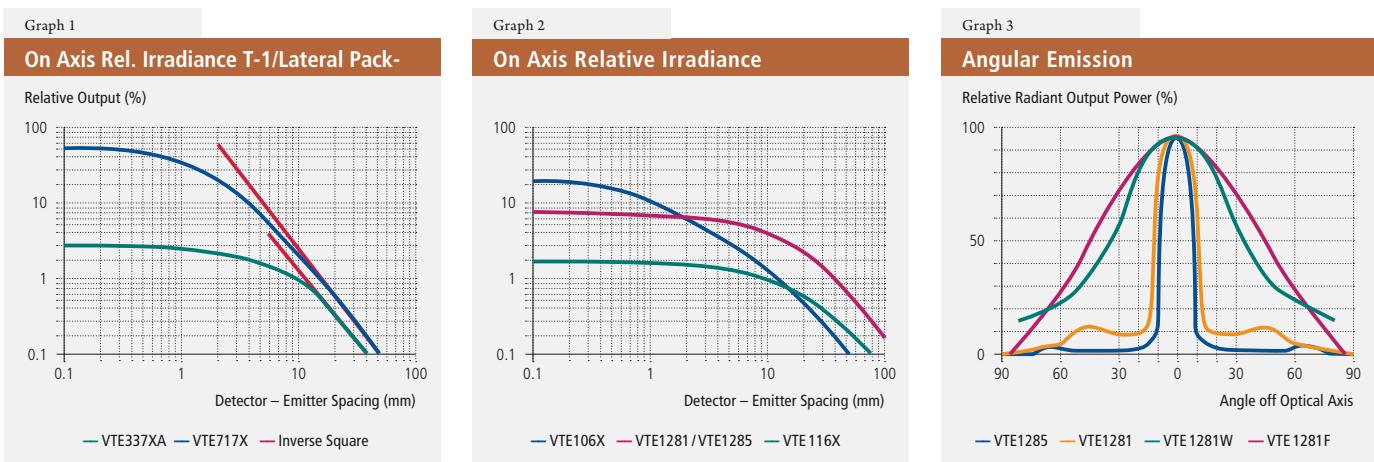

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Infrared Emitters - High Power category:***

***Click to view products by Excelitas manufacturer:***

Other Similar products are found below :

[IR19-315C/TR8](#) [SFH 4030](#) [SFH 4060](#) [HSM8-V380](#) [HSM9-V380](#) [SFH 5750](#) [PK2S-2KJE-A](#) [PK2S-2LJE-A](#) [PK2S-3KJE-A](#) [PK2S-3KKE-A](#)  
[PK2S-3LJE-A](#) [PK2S-4KJE-A](#) [AREQ-90C0-00000](#) [AREQ-80C0-00000](#) [SFH 4775S A01](#) [SST-10-IRD-B90H-S810](#) [SFH 4727A](#) [SFH 4726AS](#)  
[SFH 4717AS](#) [AREQ-8020-00000](#) [HR5P-N3FB-00000](#) [HR5P-N2FB-00000](#) [HR5P-N3CB-00000](#) [HR5P-N2CB-00000](#) [HR5P-N3CA-00000](#)  
[HR5P-N2CA-00000](#) [HR5P-N2FA-00000](#) [HR5P-N3FA-00000](#) [VSMY2853SLX01](#) [VSMY2853RGX01](#) [VSMY2853GX01](#) [VSMY2850GX01](#)  
[IN-P281ASGHIR](#) [IN-P281ASGIR](#) [QEE123](#) [HSDL-4400#011](#) [C3535SIR2C-2B](#) [KM-4457F3C](#) [L-53F3BT](#) [VTE1291W-2H](#) [LL-304IRC4B-2AD](#) [LL-503HIRT2E-1CC](#) [LL-503IRC2E-2AC](#) [LL-503IRC2V-2AD](#) [LL-503IRT2E-2AC](#) [LL-503IRT2E-2AE](#) [LL-503SIRC2E-1BD](#) [LL-503SIRC2H-1BE](#) [LL-S170IRC-2A](#) [SFH 4259](#)