



ISSUE 12; August 2012 - RoHS 2011/65/EU



Description

- Standard 7 x 5 crystal oscillators
- Ceramic package with a seam sealed metal lid, hermetically sealed
- Stock parts are available
- Fast Make capability: CFPP-73 series programmable oscillators are the nearest equivalent fast make model
- MEMS capability: IQMS-500 series oscillators are the nearest equivalent MEMS model

Frequency Range

- Frequency 0.5 to 156.0 MHz

Supply Voltage

- Voltage 3.3V $\pm 10\%$

Ageing

- Ageing ± 3 ppm per year max

Output Compatibility & Load

- Output Compatibility HCMOS

Maximum Capacitive Load	
0.5MHz to 50MHz	50pF max
>50MHz to 80MHz	30pF max
>80MHz to 160MHz	15pF max

Frequency Stabilities

- Frequency Stability ± 20 ppm, ± 25 ppm, ± 50 ppm, ± 100 ppm (inclusive of supply voltage and output load variations over the operating temperature range)

Operating Temperature Ranges

- 0 to 70°C
- 40 to 85°C

Output Control

- Logic '1' (>70% VS) to pad 1 enables oscillator output
- Logic '0' (<30% VS) to pad 1 disables oscillator output; the oscillator output goes to the high impedance state
- No connection to pad 1 enables oscillator output
- Standby Current: 10 μ A max

Environmental Parameters



- Shock: MIL-STD-202, Method 213, Condition E
- Vibration: MIL-STD-883, Method 2007, Condition A
- Storage Temperature Range: -55 to 125°C

Packing Details

- Pack Style: **Bulk** Loose in bulk pack
- Pack Size 100
- Pack Style: **Reel** Tape and reel in accordance with EIA-481-D
- Pack Size 1,000
- Alternative packing options available




Outline (mm)




Pad Connections
1. Standby Operation
2. GND
3. Output
4. +VS

Solder Pad Layout



Test Circuit

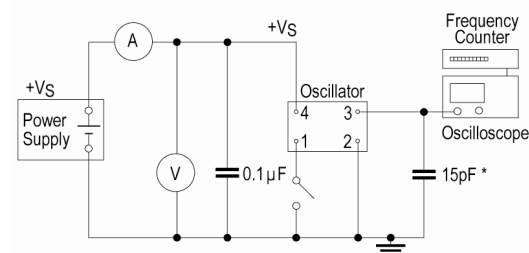


* Inclusive of jigging and equipment capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0) 650 798 5047

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

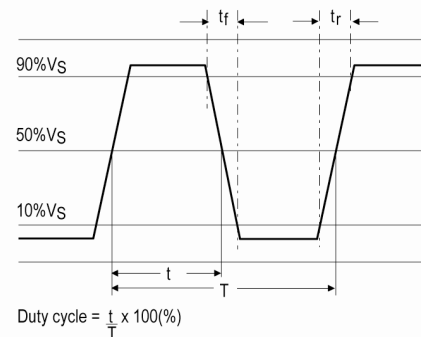**Wave Form****Electrical Specification - maximum limiting values 3.3V $\pm$ 10%**

Frequency Range	Temp Range	Stability Inclusive		Current Draw	Rise & Fall (10 to 90%)	Duty Cycle %
		Min	Max			
0.5 to 19.999999MHz	0 to 70°C	± 20 ppm	± 100 ppm	7.0mA	10ns	45/55
	-40 to 85°C	± 25 ppm	± 100 ppm	7.0mA	10ns	45/55
20.0 to 31.999999MHz	0 to 70°C	± 20 ppm	± 100 ppm	12.0mA	10ns	45/55
	-40 to 85°C	± 25 ppm	± 100 ppm	12.0mA	10ns	45/55
32.0 to 49.999999MHz	0 to 70°C	± 20 ppm	± 100 ppm	20.0mA	10ns	45/55
	-40 to 85°C	± 25 ppm	± 100 ppm	20.0mA	10ns	45/55
50.0 to 79.999999MHz	0 to 70°C	± 20 ppm	± 100 ppm	25.0mA	8ns	45/55
	-40 to 85°C	± 25 ppm	± 100 ppm	25.0mA	8ns	45/55
80.0 to 99.999999MHz	0 to 70°C	± 20 ppm	± 100 ppm	30.0mA	5ns	45/55
	-40 to 85°C	± 25 ppm	± 100 ppm	30.0mA	5ns	45/55
100.0 to 156.0MHz	0 to 70°C	± 20 ppm	± 100 ppm	40.0mA	4ns	45/55
	-40 to 85°C	± 25 ppm	± 100 ppm	40.0mA	4ns	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0) 650 798 5047

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [IQD](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA2-27.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [EMK41H2H-26.000M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SIT8920AM-22-33E-40.000000](#) [SIT8920AM-73-33E-20.000000](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-19.200MHZ-L-T](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#)