


Y5V Dielectric

General Specifications

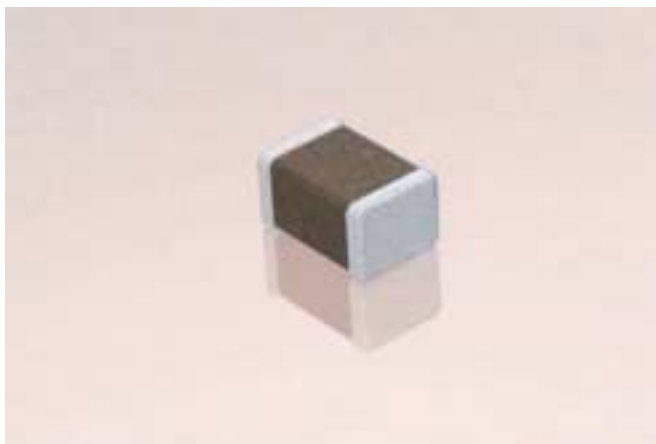

Y5V formulations are for general-purpose use in a limited temperature range. They have a wide temperature characteristic of +22% -82% capacitance change over the operating temperature range of -30°C to +85°C.

Y5V's high dielectric constant allows the manufacture of the highest capacitance value in a given case size.

These characteristics make Y5V ideal for decoupling applications within limited temperature range.

PART NUMBER (see page 2 for complete part number explanation)

0805

Size
(L" x W")

3

Voltage
6.3V = 6
10V = Z
16V = Y
25V = 3
50V = 5

G

Dielectric
Y5V = G

104

Capacitance Code (In pF)
2 Sig. Digits + Number of Zeros

Z

Capacitance Tolerance
Z = +80 -20%

A

Failure Rate
A = Not Applicable

T

Terminations
T = Plated Ni and Sn


2

Packaging
2 = 7" Reel
4 = 13" Reel


A

Special Code
A = Std. Product


Temperature Coefficient

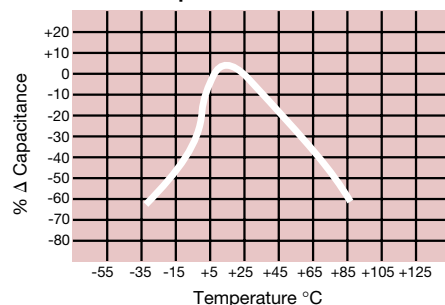


Capacitance Change vs. DC Bias Voltage

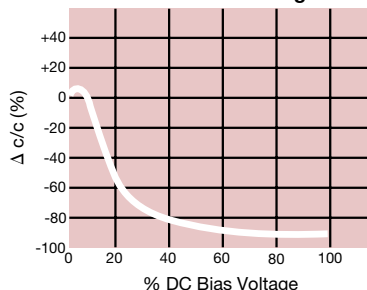


Insulation Resistance vs. Temperature

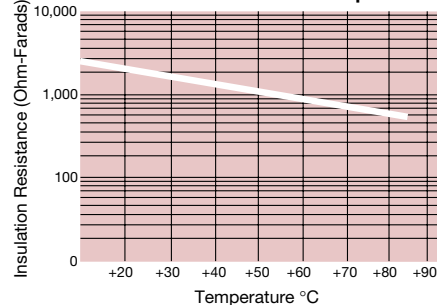


0.1 μF - 0603 Impedance vs. Frequency

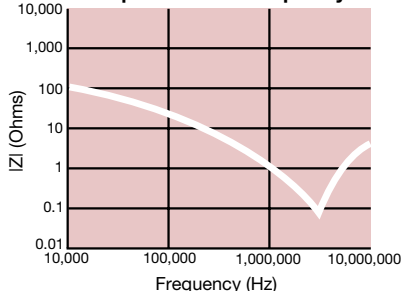

0.22 μF - 0805 Impedance vs. Frequency

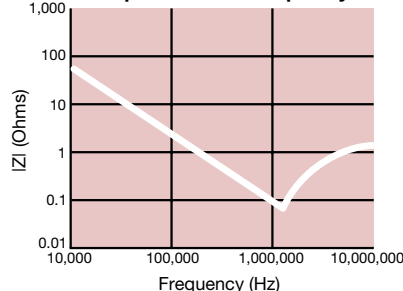


1 μF - 1206 Impedance vs. Frequency

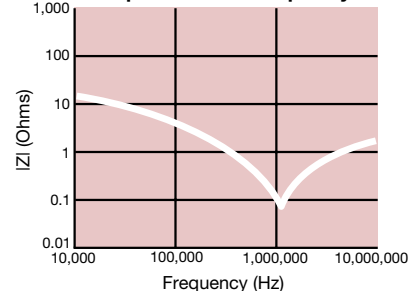

Y5V Dielectric



Specifications and Test Methods

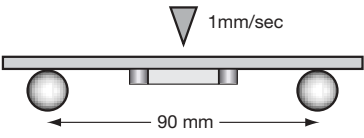Parameter/Test		Y5V Specification Limits	Measuring Conditions	
Operating Temperature Range		-30°C to +85°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz $\pm$ 10% Voltage: 1.0Vrms $\pm$.2V For Cap > 10 μ F, 0.5Vrms @ 120Hz	
Dissipation Factor		$\leq$ 5.0% for $\geq$ 50V DC rating $\leq$ 7.0% for 25V DC rating $\leq$ 9.0% for 16V DC rating $\leq$ 12.5% for $\leq$ 10V DC rating		
Insulation Resistance		100,000M Ω or 500M Ω - μ F, whichever is less	Charge device with rated voltage for 60 $\pm$ 5 secs @ room temp/humidity	
Dielectric Strength		No breakdown or visual defects	Charge device with 300% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max)	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 	
	Capacitance Variation	$\leq \pm 30\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.1		
Solderability		$\geq$ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq \pm 20\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -30°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq \pm 20\%$	Step 2: Room Temp	$\leq$ 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +85°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	$\leq$ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 $\pm$ 2 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with twice rated voltage in test chamber set at 85°C $\pm$ 2°C for 1000 hours (+48, -0) Remove from test chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 30\%$		
	Dissipation Factor	$\leq$ Initial Value x 1.5 (See Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.1 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature and humidity for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 30\%$		
	Dissipation Factor	$\leq$ Initial Value x 1.5 (See above)		
	Insulation Resistance	$\geq$ Initial Value x 0.1 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

Y5V Dielectric

Capacitance Range



PREFERRED SIZES ARE SHADED

SIZE		0201		0402					0603				0805				1206				1210				
Soldering		Reflow Only		Reflow Only					Reflow/Wave				Reflow/Wave				Reflow/Wave				Reflow/Wave				
Packaging		All Paper		All Paper					All Paper				Paper/Embossed				Paper/Embossed				Paper/Embossed				
(L) Length	MM (in.)	0.60 ± 0.03 (0.024 ± 0.001)		1.00 ± 0.10 (0.040 ± 0.004)					1.60 ± 0.15 (0.063 ± 0.006)				2.01 ± 0.20 (0.079 ± 0.008)				3.20 ± 0.20 (0.126 ± 0.008)				3.20 ± 0.20 (0.126 ± 0.008)				
(W) Width	MM (in.)	0.30 ± 0.03 (0.011 ± 0.001)		0.50 ± 0.10 (0.020 ± 0.004)					.81 ± 0.15 (0.032 ± 0.006)				1.25 ± 0.20 (0.049 ± 0.008)				1.60 ± 0.20 (0.063 ± 0.008)				2.50 ± 0.20 (0.098 ± 0.008)				
(t) Terminal	MM (in.)	0.15 ± 0.05 (0.006 ± 0.002)		0.25 ± 0.15 (0.010 ± 0.006)					0.35 ± 0.15 (0.014 ± 0.006)				0.50 ± 0.25 (0.020 ± 0.010)				0.50 ± 0.25 (0.020 ± 0.010)				.50 ± 0.25 (0.020 ± 0.010)				
WWDC		6.3	10	6.3	10	16	25	50	10	16	25	50	10	16	25	50	10	16	25	50	10	16	25	50	
Cap (pF)	2200	1000 pF	1000 pF																						
	2700	A	A																						
	3300	A	A																						
	3900	A	A																						
	4700	A	A	C	C	C	C	C																	
	5600	A	A	C	C	C	C	C																	
	6800	A	A	C	C	C	C	C																	
	8200	A	A	C	C	C	C	C																	
	Cap (μF)	0.010	A	A	C	C	C	C	C	G	G	G	G	E	E	E	E	E	E	E					
	0.012	A		C	C	C	C	C	G	G	G	G	E	E	E	E	E	E	E						
	0.015	A		C	C	C	C	C	G	G	G	G	E	E	E	E	E	E	E						
	0.018	A		C	C	C	C	C	G	G	G	G	E	E	E	E	E	E	E						
	0.022	A		C	C	C	C	C	G	G	G	G	E	E	E	E	E	E	E						
	0.027	A		C	C	C	C	C	G	G	G	G	E	E	E	E	E	E	E						
	0.033	A		C	C	C	C		G	G	G	G	E	E	E	E	E	E	E						
	0.039	A		C	C	C			G	G	G	G	E	E	E	E	E	E	E						
	0.047	A		C	C	C			G	G	G	G	E	E	E	E	E	E	E	J	J	J	J		
	0.056			C	C	C			G	G	G	G	E	E	E	E	E	E	E	J	J	J	J		
	0.068			C	C	C			G	G	G	G	E	E	E	E	E	E	E	J	J	J	J		
	0.082			C	C	C			G	G	G	G	E	E	E	E	E	E	E	J	J	J	J		
	0.10			C	C	C			G	G	G	G	E	E	E	E	E	E	E	J	J	J	J		
	0.12			C	C				G	G	G	G	J	J	J	J	J	J	J	J	J	J	J		
	0.15			C	C				G	G	G	G	J	J	J	J	J	J	J	J	J	J	J		
	0.18			C	C				G	G	G		J	J	J	J	J	J	J	J	J	J	J		
	0.22			C	C				G	G	G		J	J	J	J	J	J	J	J	J	J	J		
	0.27								G	G	G		J	J	J	M	J	J	J	J	J	J	J		
	0.33								G	G			J	J	M	M	J	J	J	J	J	J	J		
	0.39								G	G			J	J	M		J	J	J	J	J	J	J		
	0.47								G	G			J	J	N		J	J	J	J	J	J	J		
	0.56								G	G			J	J	N		J	J	J	J	J	J	J		
	0.68								G	G			J	J	N		J	J	J	J	J	J	J		
	0.82								G	G			M	M	N		J	J	J	J	J	J	J		
	1.0								G	G			N	N	N		J	J	J	J	J	J	J		
	1.2												N	N			J	J	J	J	J	M			
	1.5												N	N	N		M	M	M		J	J	M		
	1.8												N	N			M	M	M		J	J	J		
	2.2												N	N			M	M	M		J	J	J		
	2.7												N	N			M	M	M		M	M	M		
	3.3												N	N			M	M			P	P	M		
	3.9												N	N			P	P			P	P			
	4.7												P				P	P			P	P	N		
	5.6																Q				Q	Q			
	6.8																Q	Q			Q	Q			
	8.2																Q	Q			Q	Q			
	10.0																Q				Q		X		
	12.0																				X				
	15.0																				X				
	18.0																				X				
	22.0																				X				
	47.0																								
	100.0																								
WWDC		6.3	10	6.3	10	16	25	50	10	16	25	50	10	16	25	50	10	16	25	50	10	16	25	50	
SIZE		0201		0402					0603				0805				1206				1210				
Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z	BB	CC										
Max.	0.33	0.56	0.71	0.86	0.94	1.02	1.27	1.40	1.52	1.78	2.29	2.54	2.79	3.05	3.175										
Thickness	(0.013)	(0.022)	(0.028)	(0.034)	(0.037)	(0.040)	(0.050)	(0.055)	(0.060)	(0.070)	(0.090)	(0.100)	(0.110)	(0.120)	(0.125)										
	PAPER										EMBOSSED														

Contact Factory for Multiples



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) ***category:***

Click to view products by [AVX](#) ***manufacturer:***

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#) [1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#)
[2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#) [CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#)
[CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#) [CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#)
[CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#) [CGA3E1X7R1C474K](#)
[CGA3E2C0G1H561JT0Y0N](#)