

ML SERIES

105°C Long Life, 5mm~9mm Height.

◆FEATURES

- Load Life : 105°C 3000~5000 hours.
- RoHS compliance.



◆SPECIFICATIONS

Items	Characteristics																															
Category Temperature Range	-40~+105°C																															
Rated Voltage Range	6.3~50V.DC																															
Capacitance Tolerance	$\pm 20\%$ (20°C,120Hz)																															
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(V)																															
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td></td> </tr> <tr> <td>tanδ</td> <td>0.40</td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.20</td> <td>(20°C,120Hz)</td> </tr> </table>								Rated Voltage (V)	6.3	10	16	25	35	50		tanδ	0.40	0.35	0.30	0.25	0.20	0.20	(20°C,120Hz)								
Rated Voltage (V)	6.3	10	16	25	35	50																										
tanδ	0.40	0.35	0.30	0.25	0.20	0.20	(20°C,120Hz)																									
Endurance	After life test with ripple current at conditions stated in the table below at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within $\pm 30\%$ of the initial value.</td> <td>Case Size</td> <td>Life Time (hrs)</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value.</td> <td>L=5mm</td> <td>3000</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> <td>L\geq7mm</td> <td>5000</td> </tr> </table>								Capacitance Change	Within $\pm 30\%$ of the initial value.	Case Size	Life Time (hrs)	Dissipation Factor	Not more than 300% of the specified value.	L=5mm	3000	Leakage Current	Not more than the specified value.	L \geq 7mm	5000												
Capacitance Change	Within $\pm 30\%$ of the initial value.	Case Size	Life Time (hrs)																													
Dissipation Factor	Not more than 300% of the specified value.	L=5mm	3000																													
Leakage Current	Not more than the specified value.	L \geq 7mm	5000																													
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td></td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td></td> </tr> </table>								Rated Voltage (V)	6.3	10	16	25	35	50	(120Hz)	Z(-25°C)/Z(20°C)	6	4	4	3	2	2		Z(-40°C)/Z(20°C)	12	10	8	6	4	4	
Rated Voltage (V)	6.3	10	16	25	35	50	(120Hz)																									
Z(-25°C)/Z(20°C)	6	4	4	3	2	2																										
Z(-40°C)/Z(20°C)	12	10	8	6	4	4																										

◆MULTIPLIER FOR RIPPLE CURRENT

	Frequency (Hz)	60(50)	120	500	1k	10k \leq
Coefficient	1μF	0.50	1.0	1.20	1.30	1.50
	2.2~6.8μF	0.65	1.0	1.20	1.30	1.50
	10~82μF	0.80	1.0	1.20	1.30	1.50
	100~1000μF	0.80	1.0	1.10	1.15	1.20

◆OPTION

	Code
PET Sleeve	EFC

◆PART NUMBER

□□□ ML □□□□□ M □□□ Option □□ Lead Forming D×L
 Rated Voltage Series Capacitance Capacitance Tolerance Case Size




MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ML

DIMENSIONS

(mm)

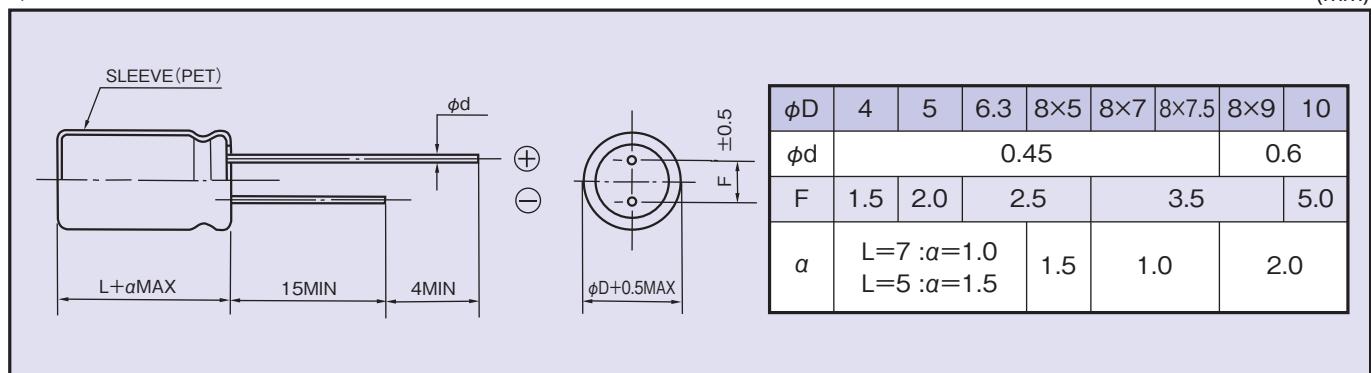

◆ STANDARD SIZE

Size $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 120Hz)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)