

Power Choke Coil

Series: **PCC-M0512W (MC)**

High power, Low loss, Low-profile



■ Features

- Small type (5.4×5.15×H1.2 mm)
- High power (2.2 A to 5.5 A)
- Low loss (R_{DC} :19.2 to 168.0 m Ω)
- Suitable for high frequency circuit (up to 1 MHz)
- Low buzz noise due to its gap-less structure
- RoHS compliant


■ Recommended Applications

- HDD, Tablet PC power supply modules
- Servers, Routers, DC-DC converters for driving CPUs

■ Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 6000 pcs./box (2 reel)

■ Explanation of Part Numbers

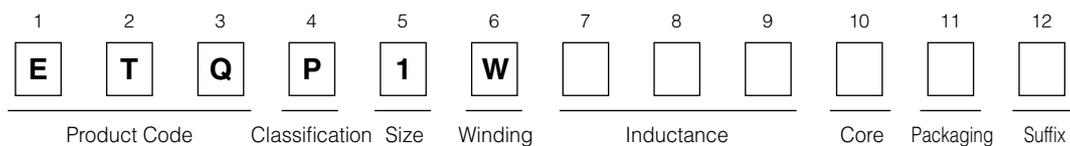

■ Standard Parts

Part No.	Inductance (at 20 °C)*1			Rated current (A)*2	DC resistance (at 20 °C) (m Ω) max.
	L0 at 0A	L1*3			
	(μ H)	(μ H)	Measurement current (A)		
ETQP1WR47WFP	0.47±20 %	(0.42)	5.5	5.5	19.2
ETQP1W1R0WFP	1.00±20 %	(0.87)	4.4	4.4	46.5
ETQP1W2R2WFP	2.20±20 %	(1.80)	3.4	3.4	77.3
ETQP1W3R3WFP	3.30±20 %	(2.70)	2.8	2.8	103.0
ETQP1W4R7WFP	4.70±20 %	(3.90)	2.2	2.2	168.0

(*1) Inductance is measured at 100 kHz.


(*2) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method A)

(*3) Reference only


(*4) Method A (PANASONIC's standard measurement conditions)

■ Performance Characteristics (Reference)


Inductance vs DC Current

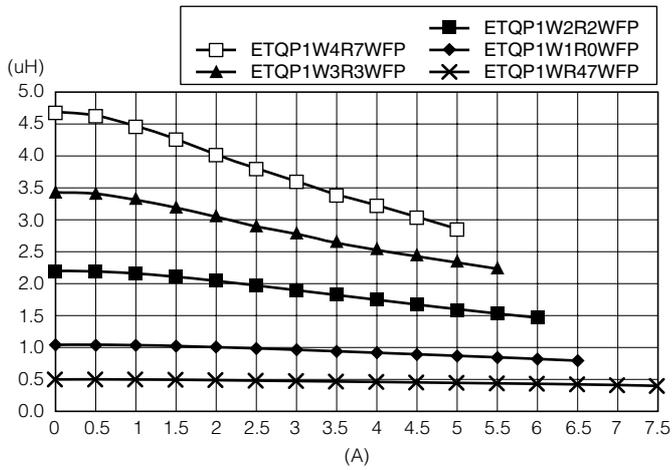


Case Temperature vs DC Current (Method A)

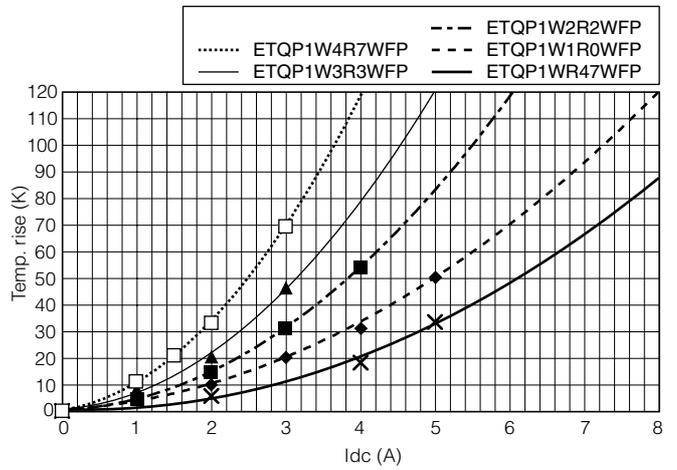


■ Dimensions in mm (not to scale)

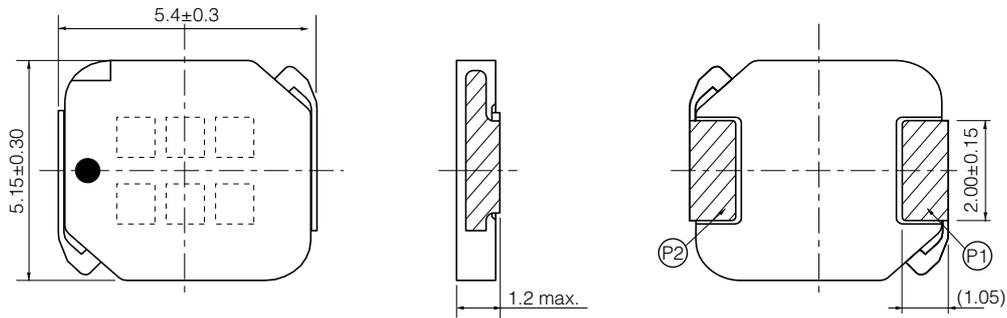

■ Connection



■ Recommended Land Pattern in mm (not to scale)

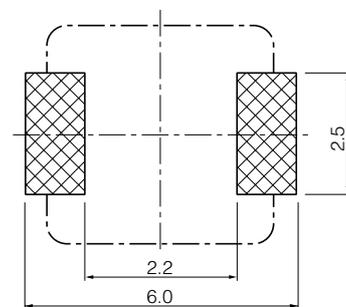

■ Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use)

Please see Data Files

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panasonic](#) manufacturer:

Other Similar products are found below :

[ECE-A1HKAR47](#) [ELC-09D151F](#) [HC2-H-DC48V-F](#) [HL2-HP-AC120V-F](#) [HL2-H-DC12V-F](#) [HL2-HP-DC12V-F](#) [HL2-HP-DC6V-F](#) [HL2-HP-DC24V-F](#) [HL2-H-DC110V-F](#) [HC4-H-DC24V](#) [HL2-HTM-DC24V-F](#) [HL2-HTM-AC24V-F](#) [HC4-H-AC24V](#) [HC4-H-AC120V](#) [HC4-H-DC12V](#) [AZH2031](#) [RP-SDMF64DA1](#) [EVM-F6SA00B55](#) [RP-SMLE08DA1](#) [ERZ-V20R391](#) [ELL-ATV681M](#) [ERZ-V05V680CB](#) [LT4H-DC24V](#) [LT4HL8-AC24V](#) [LT4HW-AC24V](#) [LT4HWT8-AC240V](#) [LT4HWT-AC240VS](#) [CY-122A-P](#) [ETQ-P5M470YFM](#) [EVAL_PAN1555](#) [EVQ-PAE04M](#) [EX-14B](#) [EX-22B-PN](#) [EX-31A-C5](#) [EXB-24N121JX](#) [EX-F72-PN](#) [EX-L211](#) [EYG-A121803V](#) [FCR-M50-AC208V](#) [FC-SFBH-20](#) [FC-SFBH-24](#) [FD-F8Y](#) [MHMA102A1C](#) [MHMD022S1S](#) [MHMD041S1S](#) [MHMD042G1T](#) [MHMD082G1T](#) [FD-S9](#) [FP0-LDR](#) [FP2-AD8X](#)