



Series 970 PowerTrip™ Connectors and Accessories

Cable Connectors

970-001 Plug with Accessory Thread

PLUG CONNECTORS



Series 970 PowerTrip™ plug connectors feature high current LouverBand contacts and rugged water resistant construction for the most demanding environments. Coupling threads are triple-start ACME type. EMI protected with ground spring and splined backshell interface. Anti-decoupling ratchet prevents de-mating under vibration. Standard contacts are silver plated high conductivity copper alloy, or choose gold-plated contacts for improved corrosion protection. Fluorosilicone rubber gaskets and grommets provide watertight sealing. Contacts are packaged with connector.

- EMI Protected
- High Current Contacts
- Splined Backshell Interface
- Ratchet Self-Locking

PRODUCT FACTS

2000 VAC Sea Level DWV Rating
 -65°C to +200°C Operating Temperature
 6 Feet Water Immersion, 48 Hours
 65 dB min. Attenuation, up to 10GHz
 500 Cycles Mating Durability
 MIL-S 901 Grade A High-Impact Shock
 43 g Random Vibration

HOW TO ORDER

SERIES	SHELL MATERIAL AND FINISH	SHELL SIZE - INSERT ARRANGEMENT						CONTACT TYPE AND PLATING	KEY POSITION		
970-001 Plug Connector	ME Aluminum, Electroless Nickel Finish	Contact	Contact Size and Qty					P1 Pin Contacts, Silver Plating*	-1 Position 1		
		Arr.	#16	#12	#8	#4	#1/0				
	18-2			2			P2 Pin Contacts, Gold Plating	-2 Position 2			
	18-4		2	2							
	20-3			3							
	20-4			4							
	20-5		2	3							
	20-7	4		3			S1 Socket Contacts, Silver Plating*	-3 Position 3			
	24-2				2						
	24-3				3						
	24-5			5							
	24-6		4		2						
	24-A6		3		3		S2 Socket Contacts, Gold Plating	-4 Position 4			
	28-4				4						
	28-8		1	7							
	28-9	5			4						
	28-15	15									
	32-2					2	A Pin Connector, without Contacts	-5 Position 5			
	32-3					3					
	32-4				2	2					
	32-5				5						
	32-6		3			3					
	32-20	1	19								
	36-4					4					
	36-16	3		13							
	40-5					5					
	40-21			21							
Sample Part Number											
970-001	MT	18- 2							P2	-1	


* Size 12 and 16 contacts are gold-plated. Size 8, 4 and 1/0 are silver plated.

Series 970 PowerTrip™ Connectors and Accessories Cable Connectors


970-001 Plug with Accessory Thread



970-001 PLUG CONNECTOR

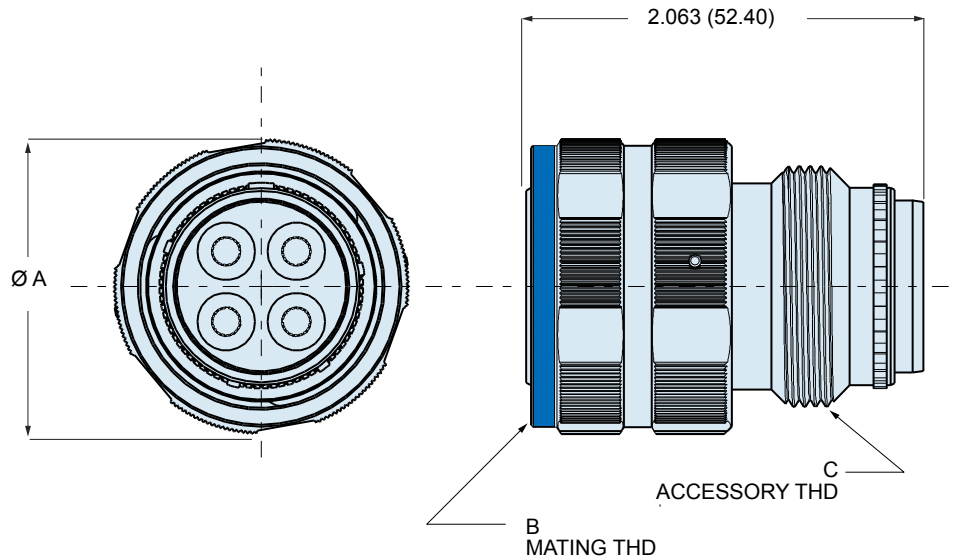

DIMENSIONS				
Shell Size	Ø A		B Mating Thread	C Accessory Thread
	In.	mm.		
18	1.485	37.72	1.125-0.1P-.3L-TS-2B	1.125-18 UNEF-2A
20	1.583	40.21	1.250-0.1P-.3L-TS-2B	1.250-18 UNEF-2A
24	1.875	47.63	1.500-0.1P-.3L-TS-2B	1.4375-18 UNEF-2A
28	2.186	55.52	1.750-0.1P-.3L-TS-2B	1.8125-16 UN-2A
32	2.420	61.47	2.000-0.1P-.3L-TS-2B	2.0625-16 UNS-2A
36	2.709	68.81	2.250-0.1P-.3L-TS-2B	2.250-16 UN-2A
40	2.980	75.69	2.500-0.1P-.3L-TS-2B	2.500-16 UN-2A

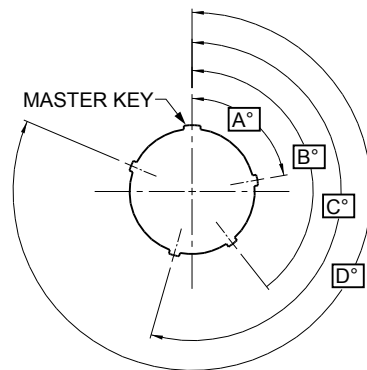

KEY POSITIONS				
Position	A°	B°	C°	D°
1	80	142	196	293
2	135	170	200	310
3	49	169	200	244
4	66	140	200	257
5	62	145	180	280
6	79	153	197	272

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Mounting Fixings](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[007310](#) [007541](#) [6-141-P](#) [620HA038NF09](#) [620HA038NF11](#) [71-074914-006](#) [71-146610-6H](#) [712HA170B23128-N](#) [75-69116-8S](#) [75-69211-3P](#)
[75-69224-28P](#) [75-69224-5S](#) [770-006A109](#) [770-006A109R](#) [770-006A207](#) [770-006A208W1](#) [770-006A209](#) [770-006A306](#) [770-006A703W1](#)
[770-006A704](#) [770-006A704W1](#) [770-006A705](#) [770-006A706](#) [770-006A706W1](#) [770-006A707](#) [770-006A709](#) [770-007A203](#) [770-007A203W1](#)
[770-007A204W1](#) [770-007A207W1](#) [770-007A703](#) [770-007A704W1](#) [770-007A706](#) [770-007A707W1](#) [770-010Y208](#) [770-010Y308](#) [770-](#)
[010Y705](#) [770-010Y706](#) [770-010Y707W1](#) [770-011T201](#) [770-011T203](#) [770-011T701W1](#) [770-011T702](#) [770-011T702W1](#) [770-011T703](#) [770-](#)
[013311](#) [770-013312](#) [770-013709](#) [770-013711](#) [770-013711W1](#)