



Stud Thyristor

Line Thyristor

SKT 24

Features

- Hermetic metal case with glass insulator
- Threaded stud ISO M6 or UNF 1/4-28
- International standard case

Typical Applications

- DC motor control (e. g. for machine tools)
- Controlled rectifiers (e. g. for battery charging)
- AC controllers (e. g. for temperature control)
- Recommended snubber network e. g. for $V_{VRMS} \leq 400$ V:
 $R = 100 \Omega/5 W$, $C = 0,1 \mu F$

¹⁾ Available with UNF thread 1/4-28 UNF2A, e. g. SKT 24/12E UNF

V_{RSM}	V_{RRM}, V_{DRM}	$I_{TRMS} = 50 A$ (maximum value for continuous operation) $I_{TAV} = 24 A$ (sin. 180; $T_c = 95^\circ C$)
500	400	SKT 24/04D
900	800	SKT 24/08D
1300	1200	SKT 24/12E ¹⁾
1500	1400	SKT 24/14E
1700	1600	SKT 24/16E ¹⁾
1900	1800	SKT 24/18E

Symbol	Conditions	Values	Units
I_{TAV}	sin. 180; $T_c = 100$ (85) $^\circ C$; K5; $T_a = 45^\circ C$; B2 / B6	22 (29)	A
I_D	K3; $T_a = 45^\circ C$; B2 / B6	22 / 30	A
I_{RMS}	K5; $T_a = 45^\circ C$; W1C	28 /40 24	A
I_{TSM}	$T_{vj} = 25^\circ C$; 10 ms $T_{vj} = 130^\circ C$; 10 ms	450	A
i^2t	$T_{vj} = 25^\circ C$; 8,35 ... 10 ms $T_{vj} = 130^\circ C$; 8,35 ... 10 ms	380 1000 720	A's A ² s
V_T	$T_{vj} = 25^\circ C$; $I_T = 75 A$	max. 1,9	V
$V_{T(TO)}$	$T_{vj} = 130^\circ C$	max. 1	V
r_T	$T_{vj} = 130^\circ C$	max. 10	mΩ
$I_{DD}; I_{RD}$	$T_{vj} = 130^\circ C$; $V_{RD} = V_{RRM}$; $V_{DD} = V_{DRM}$	max. 8	mA
t_{gd}	$T_{vj} = 25^\circ C$; $I_G = 1 A$; $dI_G/dt = 1 A/\mu s$	1	μs
t_{gr}	$V_D = 0,67 * V_{DRM}$	2	μs
$(di/dt)_{cr}$	$T_{vj} = 130^\circ C$	max. 50	A/μs
$(dv/dt)_{cr}$	$T_{vj} = 130^\circ C$; SKT ...D / SKT ...E	max. 500 / 1000	V/μs
t_q	$T_{vj} = 130^\circ C$	80	μs
I_H	$T_{vj} = 25^\circ C$; typ. / max.	80 / 150	mA
I_L	$T_{vj} = 25^\circ C$; typ. / max.	150 / 300	mA
V_{GT}	$T_{vj} = 25^\circ C$; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25^\circ C$; d.c.	min. 100	mA
V_{GD}	$T_{vj} = 130^\circ C$; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 130^\circ C$; d.c.	max. 3	mA
$R_{th(j-c)}$	cont.	0,8	K/W
$R_{th(j-c)}$	sin. 180	0,9	K/W
$R_{th(j-c)}$	rec. 120	0,95	K/W
$R_{th(c-s)}$		0,5	K/W
T_{vj}		- 40 ... + 130	°C
T_{stg}		- 40 ... + 150	°C
V_{isol}	to heatsink	-	V~
M_s		2,5	Nm
a		5 * 9,81	m/s ²
m	approx.	13	g
Case		B 2	



SKT

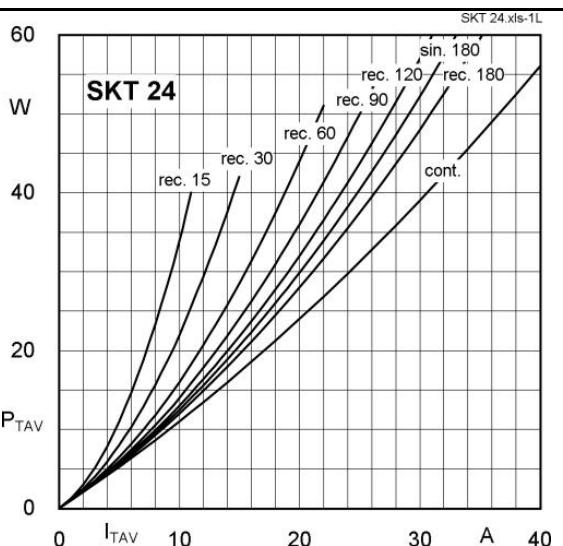


Fig. 1L Power dissipation vs. on-state current

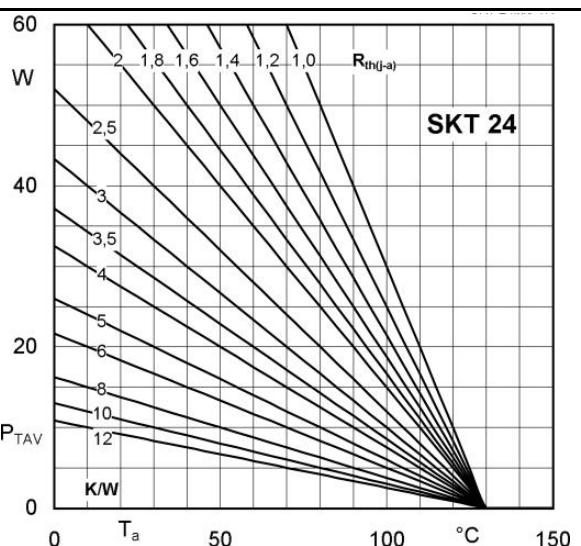


Fig. 1R Power dissipation vs. ambient temperature

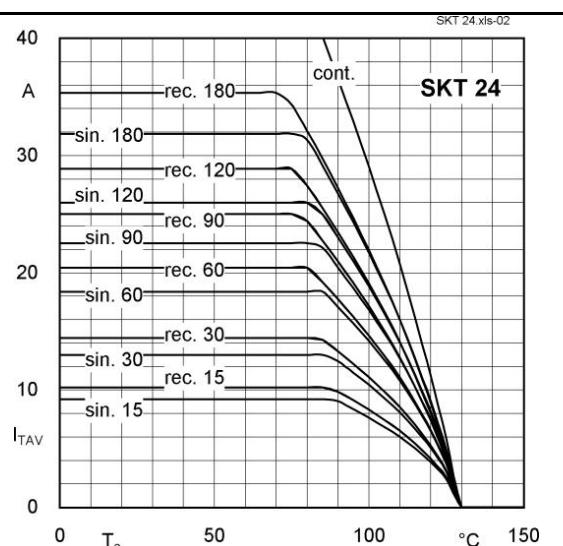


Fig. 2 Rated on-state current vs. case temperature

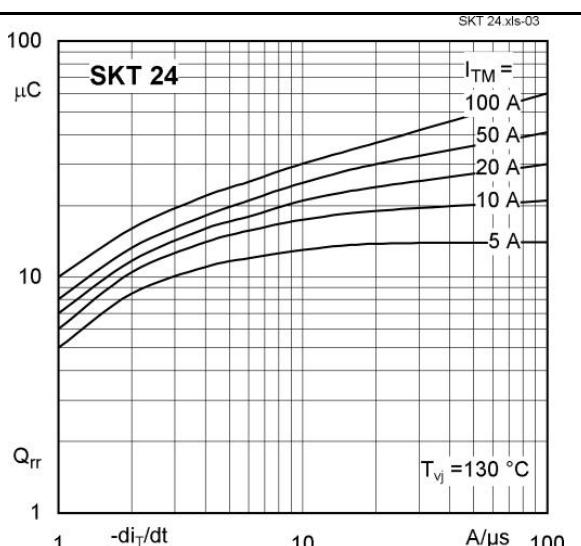


Fig. 3 Recovered charge vs. current decrease

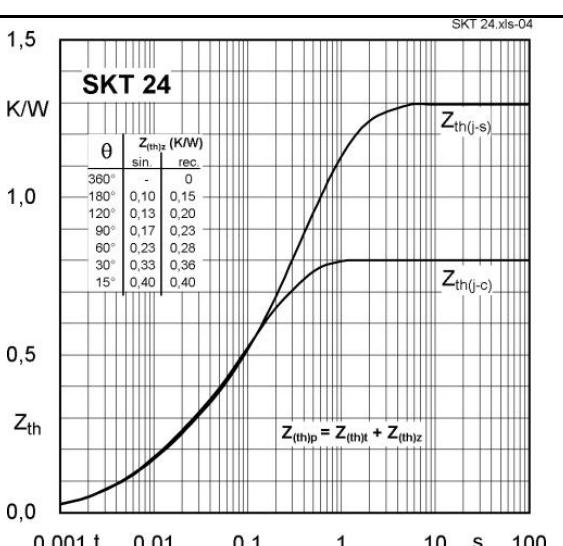


Fig. 4 Transient thermal impedance vs. time

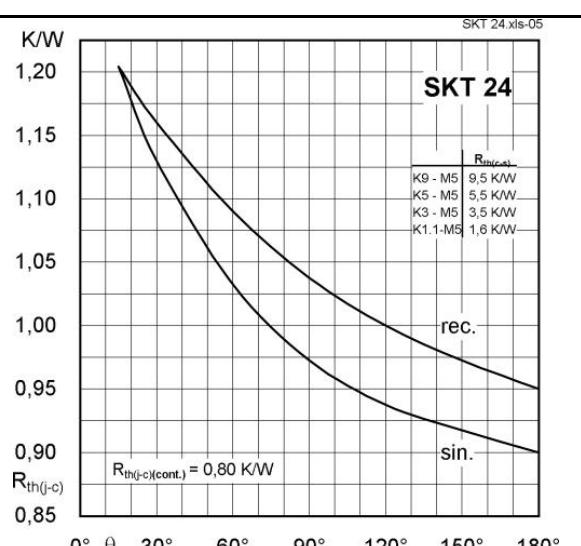


Fig. 5 Thermal resistance vs. conduction angle

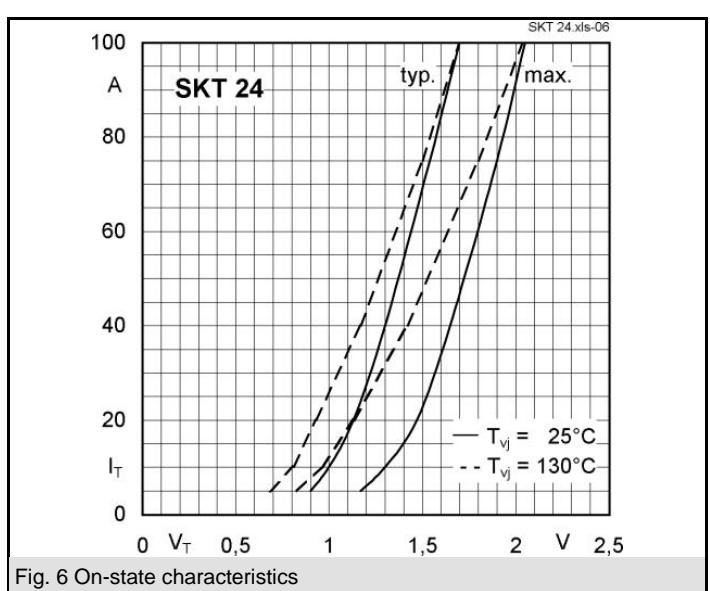


Fig. 6 On-state characteristics

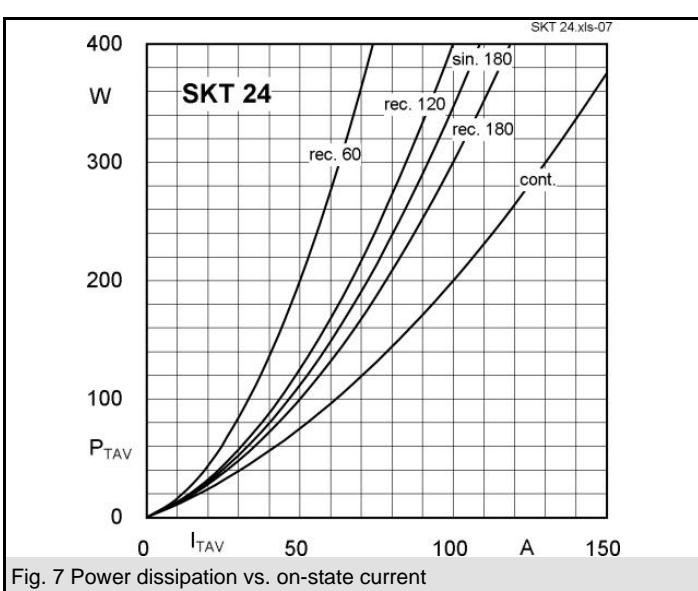


Fig. 7 Power dissipation vs. on-state current



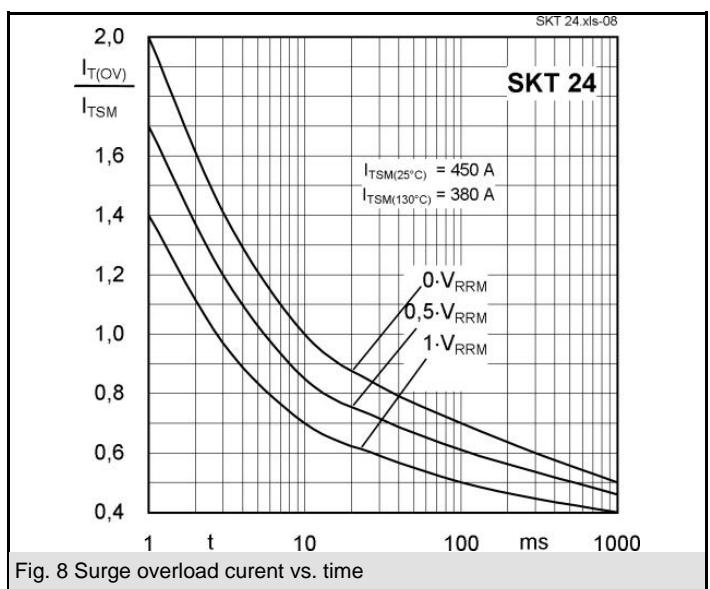


Fig. 8 Surge overload current vs. time

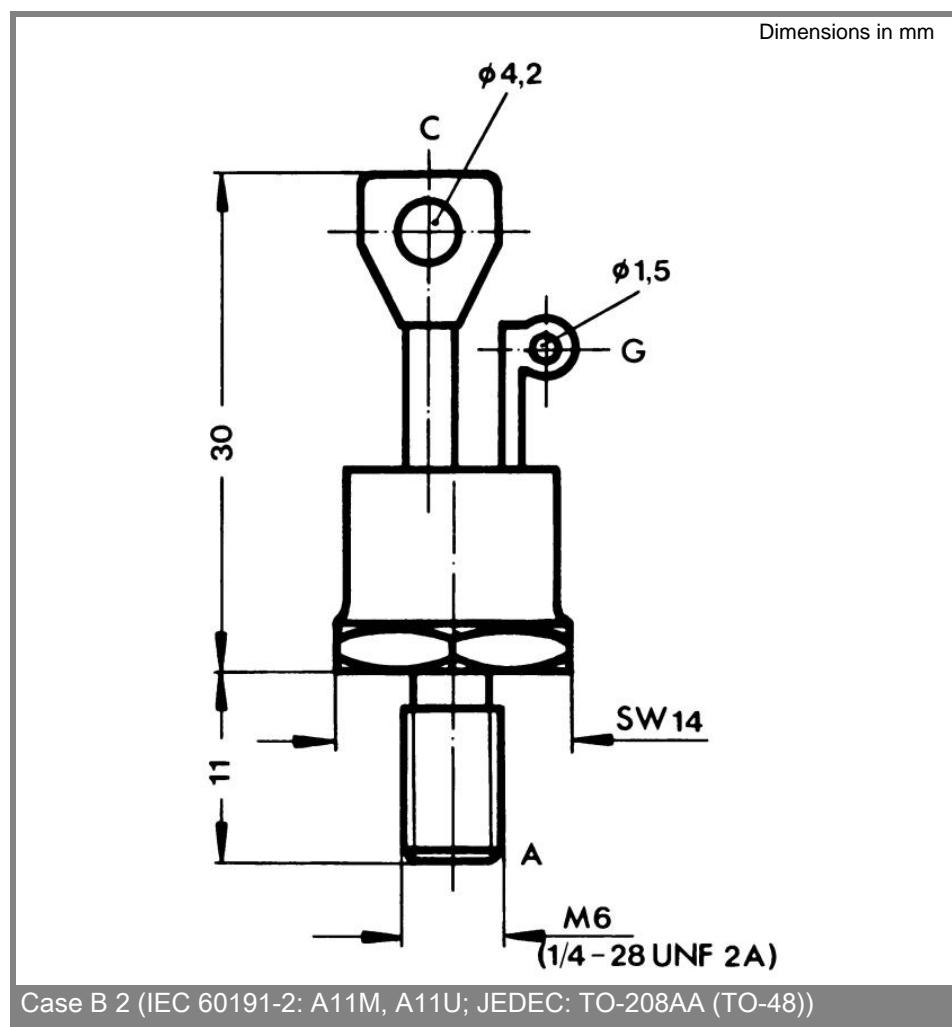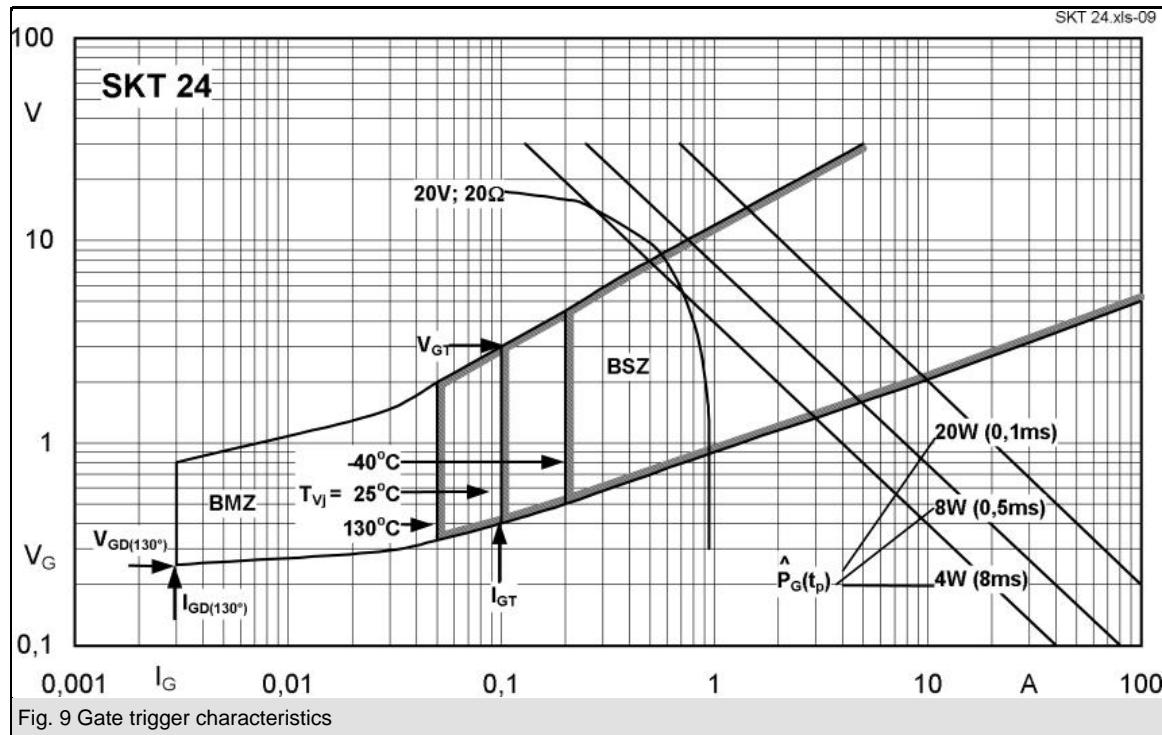

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

X-ON Electronics

Authorized Distributor

Click to view similar products for [SCRs](#) category.

Click to view products by [Semikron](#) manufacturer.

Other Similar products are found below :

[SKT4016E](#) [TYN616](#) [T321608](#) [T321610](#) [CS2316IO2](#) [CS2208io1M](#) [SK055M](#) [SK040NRP](#)
[SK025R](#) [SK016NRP](#) [2N6508TG](#) [2N6507TG](#) [2N6507](#) [2N6405G](#) [2N6399G](#) [2N2329](#)
[S8070WTP](#) [S8070W](#) [S8055W](#) [S8055NRP](#) [S8035KTP](#) [S8025RTP](#) [S8025NRP](#) [S6X8ES1](#)
[S6055W](#)