



- Three Phase AC Input
- Up to 93% Efficiency
- Wide Adjustment Range
- Full Power -40 ° C to +60 ° C
- Rugged Design for Industrial Applications
- Single Phase Input Operation (340–575 VAC)
- 3 Year Warranty

## Specification

### Input

Input Voltage	• 340-575 VAC 3 phase (single phase operation with 75% of rated output), 480-820 VDC
Input Frequency	• 47-63 Hz
Input Current	• See tables
Inrush Current	• DNR120: 10.0 A, DNR240: 20.0 A, DNR480: 20.0 A, DNR960: 30.0 A, typical at 480 VAC, cold start
Power Factor	• 0.6 typical at 480 VAC input and nominal load, DNR960TS: 0.8 typical at 480 VAC input and nominal load
Earth Leakage Current	• 0.32 mA
Input Protection	• 3 internal fuses, DNR120TS, DNR240TS: T2.0 A, 600 VAC, DNR480TS: T3.15 A, 500 VAC, DNR960TS: T5.0 A, 500 VAC

### Output

Output Voltage	• See table
Output Voltage Trim	• See table
Initial Set Accuracy	• ±1%
Minimum Load	• No minimum load required
Start Up Delay	• <1 s (may increase at low temperature extremes)
Start Up Rise Time	• <150 ms
Hold Up Time	• 20 ms min at 480 VAC, DNR960TS: 15 ms min at 480 VAC
Line Regulation	• ±1%
Load Regulation	• ±1% max (±5% for units in parallel (not DNR120TS))
Parallel Operation	• 2 units can be connected in parallel (not DNR120TS), total power available is 90% of the rated current of each unit, minimum load per unit 10%, use Ishare connection for DNR960TS. Redundancy module DPM10 available for load currents up to 10 A, contact sales
Transient Response	• 4% max deviation recovering to within 1% in 2 ms for 50% load change
Ripple & Noise	• 100 mV pk-pk 20 MHz bandwidth, DNR960TS: 80 mV pk-pk 20 MHz bandwidth, (may increase at low temperature extremes)
Overvoltage Protection	• 120-145%, auto recovery
Overload Protection	• 110%-140%, constant current, auto recovery
Temperature Coefficient	• ±0.03%/°C
Short Circuit Protection	• Continuous trip and restart (hiccup mode) (DNR480TS switchable hiccup mode or power limited )

### General

Efficiency	• See table
Isolation	• 3000 VAC Input to Output, 1500 VAC Input to Ground, 500 VAC Output to Ground
Switching Frequency	• DNR120TS: 70 kHz typical, DNR240TS: 25 kHz typical, DNR480TS: 80 kHz typical, DNR960TS: 52 kHz typical
Signals	• DC ON indicator LED Green, DC LOW indicator LED Red DC OK: normally open relay on 24 V models
MTBF	• DNR120TS: 550 kHrs, 240TS: 500 kHrs 480TS: 420 kHrs, 960TS: 380 kHrs to Bellcore Issue 6, at +40 °C, GB
DIN Rail	• Compatible with TS35/7.5 or TS35/15

### Environmental

Operating Temperature	• -40 °C to 70 °C (DNR480TS -30 °C), derate linearly from 60 °C at 2.5%/°C (3.5%/°C for DNR960TS), start up at -35 °C (DNR480TS -20 °C) see derating curves
Cooling	• Convection-cooled with 25 mm free space all sides
Operating Humidity	• 20-95% RH, non-condensing
Storage Temperature	• -40 °C to +85 °C
Shock	• 15 g, 11 ms, 3 axis, 6 faces, 3 shocks/face
Vibration	• 2 g, 10 Hz to 500 Hz, along X, Y & Z axis, 60 min/axis, mounted on rail

### EMC & Safety

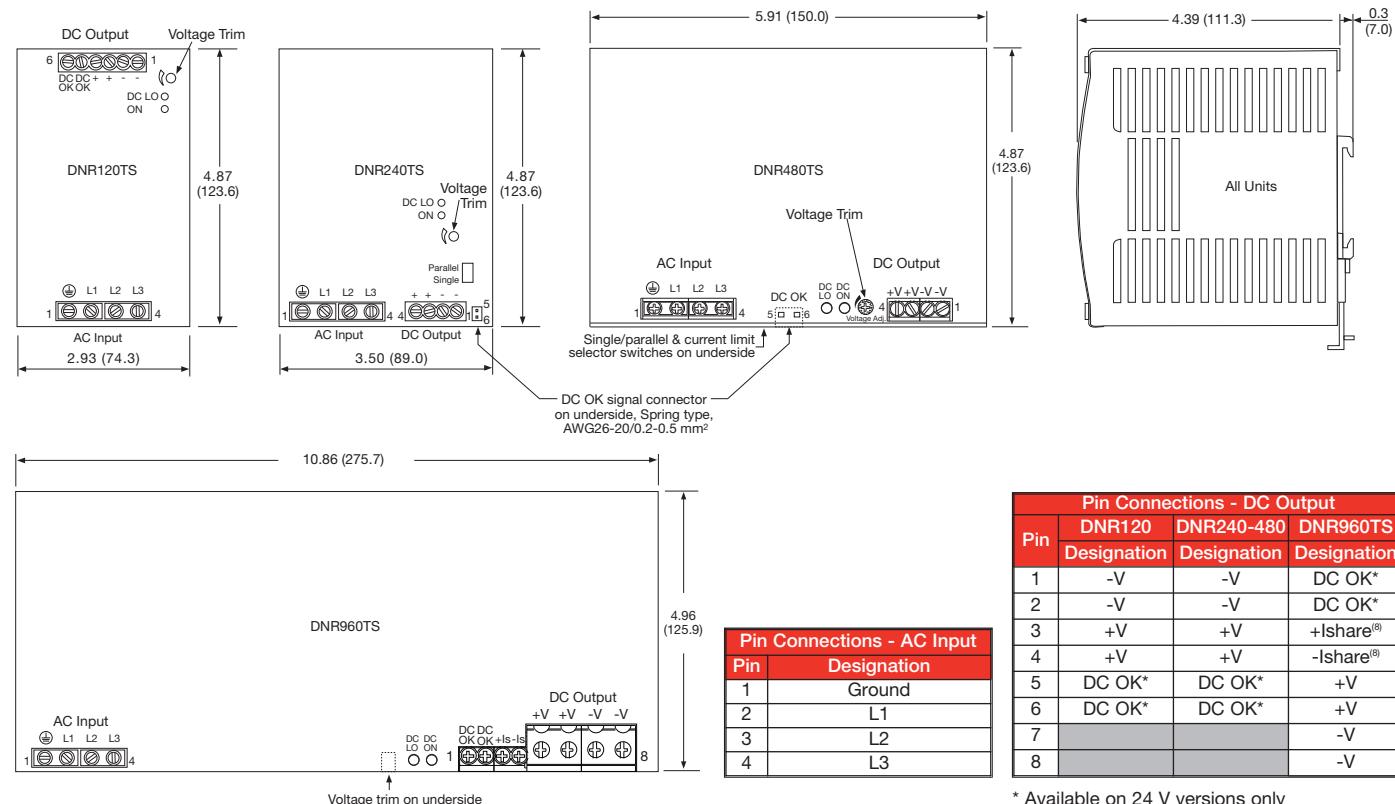
Emissions	• EN55022, Class B conducted & radiated
Harmonic Currents	• EN61000-3-2, Class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 4 Perf Criteria A
Radiated Immunity	• EN61000-4-3, level 3 Perf Criteria A
EFT/Burst	• EN61000-4-4, level 4 Perf Criteria A
Surge	• EN61000-4-5, installation class 4, Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 3 perf criteria A
Magnetic Field	• EN61000-4-8, level 4 perf criteria A
Dips & Interruptions	• EN61000-4-11, 30% 500 ms, 60% 200 ms, >95% 5000 ms Perf Criteria A, A, A
Safety Approvals	• EN60950-1 UL508 UL60950-1 Pollution Degree 2, UL60950-1 Overvoltage Category II UL508 Overvoltage Category III, ANSI/ISA 12.12.01 Class 1, Division 2, Groups A,B,C and D

**Models and Ratings**

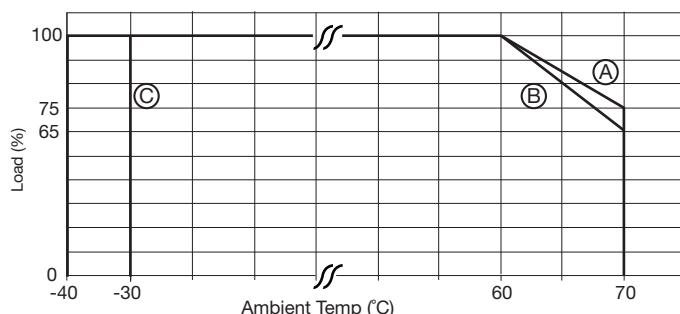
Output Voltage	Input Current (typ.)		Output Voltage Trim	Output Current <sup>(1)</sup>	Efficiency (typ.)	Model Number
	400 VAC	500 VAC				
12 V	0.36 A	0.30 A	11.4-14.5 V	10.0 A	87%	DNR120TS12
24 V	0.36 A	0.30 A	22.5-28.5 V	5.0 A	89%	DNR120TS24
24 V	0.65 A	0.55 A	22.5-28.5 V	10.0 A	90%	DNR240TS24-I
48 V	0.65 A	0.55 A	47.0-56.0 V	5.0 A	91%	DNR240TS48-I
24 V	1.10 A	0.93 A	22.5-28.5 V	20.0 A	90%	DNR480TS24-I
48 V	1.10 A	0.93 A	47.0-56.0 V	10.0 A	91%	DNR480TS48-I
24 V	1.72 A	1.50 A	22.5-28.5 V	40.0 A	92%	DNR960TS24-I
48 V	1.72 A	1.50 A	47.0-56.0 V	20.0 A	93%	DNR960TS48-I

**Notes**

1. Reduce by 25% for single phase input operation, (340-575 VAC).

**Mechanical Details****Notes**

- All dimensions in inches (mm).
- Tolerance: ±0.02 (0.5) maximum.
- Weight - DNR120TS: 1.76 lb (800 g) approx.  
DNR240TS: 2.43 lb (1100 g) approx.  
DNR480TS: 4.23 lb (1720 g) approx.  
DNR960TS: 7.05 lb (3200 g) approx.
- Screw terminal: 10-24 AWG cable size.
- DC OK Relay rated at 60 VDC at 300 mA.
- Allow 0.98" (25 mm) clearance all round to ensure adequate ventilation.
- Connection screw maximum torque: Input: 9 lbs-in (1.0 Nm), Output: 5.5 lbs-in (0.6 Nm).
- Connecting +Ishare and -Ishare between two power supplies will force the units to current share.

**Derating Curves**

(A) DNR120-240TS

(B) DNR960TS

(C) DNR480TS

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for xp power manufacturer:***

Other Similar products are found below :

[FCM400PS12](#) [HDS1500PS48](#) [ASB110PS28](#) [ECE40US24-SD](#) [ECE40US48](#) [ECE60US48-S](#) [ECL15UD02-T](#) [ECM40UT33](#) [ECM60US48](#)  
[EMH250PS12](#) [EML15US24-E](#) [EML30US03-S](#) [IA0524D](#) [ISW0505A](#) [ITV2405SA](#) [JCA0205S05](#) [JCA0248S05](#) [JCD0412D05](#) [JCK3012S05](#)  
[IA2424S](#) [IE1205SH](#) [JCA0305S15](#) [JCG1212S05](#) [JCK6048S12](#) [JTE0624D24](#) [JTL6048S12](#) [JTK3024S15](#) [JTC0648D03](#) [JTC0624S05](#)  
[JSM2524S12](#) [JHL0624S05](#) [ACS40-60 LOOM](#) [JCP4024T0515](#) [JCM3024S12](#) [JCM3012S12](#) [JCK3048S05](#) [RCQ50110S15](#) [JCD0612S05](#)  
[IF0503S](#) [IEU0224D12](#) [IEQ0524S3V3](#) [IEU0312D05](#) [IEQ0548S24](#) [VER36US120-JA](#) [VER18US150-JA](#) [AH20N-12](#) [ECM40/60S LOOM](#)  
[MTC3528S12](#) [TR05S15](#) [ECL15 DIN CLIP](#)