

IRC series

C12-A2x

8-pin, Interface relays, 2-pole, plug-in faston

Type	C12-A2x/ ... V Standard relay 2 change-over contact			
Maximum contact load	5 A/250 V	AC1	0,5 A/110 V	DC1
	5 A/30 V	DC1	0,2 A/220 V	DC1
Recommended minimum contact load	1 mA/10 V (with 10 μ Au) 10 mA/10 V (standard contact)			

Contacts

Material	Standard	Code 1	AgNi + 0,2 μ Au
	Optional	Code 2	AgNi + 10 μ Au
Rated current	5 A		
Switch-on current max. (20 ms)	15 A		
Switching voltage max.	250 V		
AC load	1,2 kVA		
DC load	see fig. 2		

Coil

Coil resistance	see table; tolerance $\pm 10\%$
Pick-up voltage	$\geq 0,8 \times U_N$
Release voltage	$\geq 0,1 \times U_N$
Nominal power	1,1 VA (AC)/0,7 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1200	23	24	742	32
115	7.300	9,5	48	3.500	13,7
230	28.800	4,7	110	19.900	5,5

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	3000 V
Contact/coil	5 kV
Insulation resistance at 500 V	≥ 3 G Ω
Insulation, IEC 61810-5	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)...60 $^{\circ}$ C / -40 ... 80 $^{\circ}$ C
Pick-up time/bounce time	10 ms/ ≤ 1 ms
Release time/bounce time	5 ms/ ≤ 3 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill. switching cycles
Rated load	≥ 100000 switching cycles
Switching frequency at rated load	≤ 1200 /h
Protection class	IP40
Weight	21 g

Standard types

AC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)

LED

RC suppresor

DC 12, 24, 48, 110

LED

Polarity and free wheeling diode

AC/DC bridge rectifier 24 V, 48 V, 60 V

C12-A21/AC ... V
C12-A21X/AC ... V
C12-A21R/AC ... V

C12-A21/DC ... V
C12-A21X/DC ... V
C12-A21FX/DC ... V

C12-A21BX/UC ... V

C12-A22/AC ... V
C12-A22X/AC ... V
C12-A22R/AC ... V

C12-A22/DC ... V
C12-A22X/DC ... V
C12-A22FX/DC ... V

C12-A22BX/UC ... V

"..." Enter the voltage for full type designation

Accessories

Socket: S12, S12-P



Connection diagram

Gap:
0,5 mm




Fig. 1 AC voltage endurance



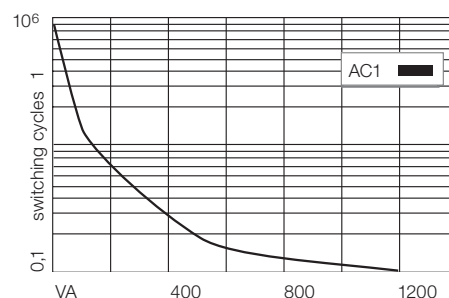


Fig. 2 DC load limit curve

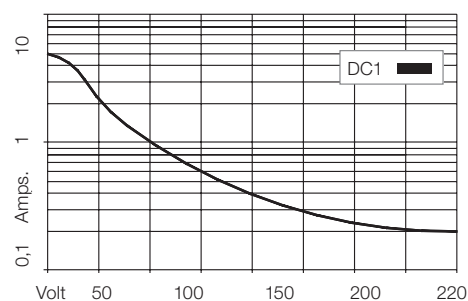

Dimensions [mm]

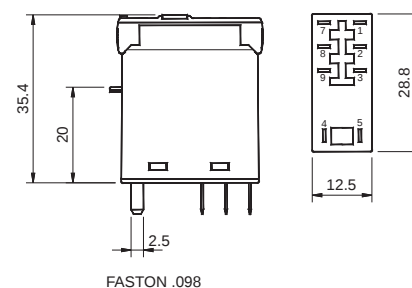

Technical approvals, conformities



IEC 61810; EN 60947

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Releco](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)