


# ADAM-4017+ ADAM-4018+ ADAM-4019+

8-ch Analog Input Module with Modbus

8-ch Thermocouple Input Module with Modbus


8-ch Universal Analog Input Module with Modbus

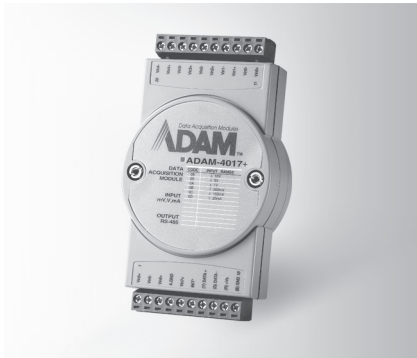

ADAM-4017+



ADAM-4018+

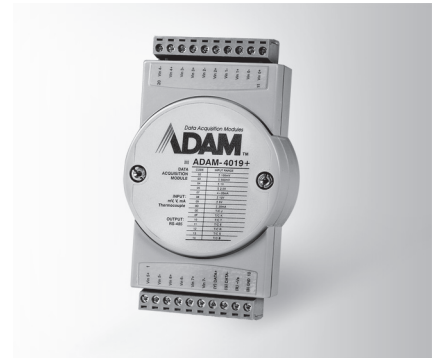

ADAM-4019+



## Specifications

### General

- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Input

- **Channels** 8 differential
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ  
Current: 120 Ω
- **Input Type** mV, V, mA
- **Input Range** ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, ±20 mA, 4 ~ 20 mA

## Specifications

### General

- **Power Consumption** 0.8 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Input

- **Channels** 8 differential
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ  
Current: 120 Ω
- **Input Type** Thermocouple, mA
- **Input Range** 0 ~ 20 mA, 4 ~ 20 mA
- **T/C Types and Temperature Ranges**

<b>J</b>	0 ~ 760°C	<b>R</b>	500 ~ 1,750°C
<b>K</b>	0 ~ 1,370°C	<b>S</b>	500 ~ 1,750°C
<b>T</b>	-100 ~ 400°C	<b>B</b>	500 ~ 1,800°C
<b>E</b>	0 ~ 1,000°C		

- **Burn-out Detection** All T/C

## Specifications

### General

- **Power Consumption** 1.0 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Input

- **Channels** 8 differential channels for individual input type
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ  
Current: 120 Ω
- **Input Type** T/C, mV, V, mA
- **Input Range** ±1 V, ±2.5 V, ±5 V, ±10 V, ±100 mV, ±500 mV, ±20 mA, 4 ~ 20 mA

### T/C Types and Temperature Ranges

<b>J</b>	0 ~ 760°C	<b>R</b>	500 ~ 1,750°C
<b>K</b>	0 ~ 1,370°C	<b>S</b>	500 ~ 1,750°C
<b>T</b>	-100 ~ 400°C	<b>B</b>	500 ~ 1,800°C
<b>E</b>	0 ~ 1,000°C		

- **Burn-out Detection** 4 ~ 20 mA & all T/C

## Common Specifications

### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Connectors** 2 x plug-in terminal block (#14 ~ 22 AWG)

### Analog Input

- **Accuracy** Voltage mode: ±0.1% or better  
Current mode: ±0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/second (total)
- **Isolation Voltage** 3,000 V<sub>DC</sub>

- **Overvoltage Protection** ±35 V<sub>DC</sub>
- **CMR @ 50/60 Hz** 120 dB
- **NMR @ 50/60 Hz** 100 dB
- **Span Drift** ±25 ppm/°C
- **Zero Drift** ±6 μV/°C
- **Built-in TVS/ESD Protection**

### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- **ADAM-4017+** 8-ch Analog Input Module with Modbus
- **ADAM-4018+** 8-ch Thermocouple Input Module w/Modbus
- **ADAM-4019+** 8-ch Universal Analog Input Module w/Modbus

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [G88104401](#) [GUR02](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [SM-IDC15](#) [G34960001700](#) [G77-S](#) [G78-16-E](#) [GP34829091724](#) [GP34960005700](#) [JQP4](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [GT1-DA04](#) [B7AM-6BS](#) [GRT1-ML2](#) [GRT1-TS2P](#) [CRT1-ID16TAH-1](#) [70GRCQ24-HS](#) [CRT1-ID08](#) [G7TC-ID16](#) [DC24V](#) [CRT1-ID08-1](#) [84110210](#) [6422](#) [AIIS-DIO32-00A1E](#) [84110410](#) [GT1-OD16MX](#) [GRT1-PC8](#) [G7VC-OC16-B7](#) [G7TC-OC08-1](#) [DC24V](#) [G7TC-IA16](#) [AC200/220V](#) [G7TC-OC08](#) [DC24V](#) [70MRCK24-DIN](#) [2736505](#) [ODC5AQ](#)