

DATA SHEET

ARRAY CHIP RESISTORS

YC/TC 164 (8Pin/4R)

5%, 1%

sizes 4 × 0603

RoHS compliant



SCOPE

This specification describes YCI64 (convex) and TCI64 (concave) series chip resistor arrays with lead-free terminations made by thick film process.

APPLICATIONS

- Terminal for SDRAM and DDRAM
- Computer applications: laptop computer, desktop computer
- Consume electronic equipment: PDAs, PNDs
- Mobile phone, telecom...

FEATURES

- RoHS compliant
 - Products with lead free terminations meet RoHS requirements
 - Pb-glass contained in electrodes
 - Resistor element and glass are exempted by RoHS
- Reducing environmentally hazardous wastes
- High component and equipment reliability
- Saving of PCB space
- None forbidden-materials used in products/production
- Halogen Free Epoxy

ORDERING INFORMATION - GLOBAL PART NUMBER & I2NC

Both part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

YAGEO BRAND ordering code

GLOBAL PART NUMBER (PREFERRED)

YC TC 164 - X X X XX XXXX L
 (1) (2) (3) (4) (5) (6)

(1) TOLERANCE

F = $\pm 1\%$

J = $\pm 5\%$ (for Jumper ordering, use code of J)

(2) PACKAGING TYPE

R = Paper taping reel

(3) TEMPERATURE COEFFICIENT OF RESISTANCE

– = Base on spec

(4) TAPING REEL

07 = 7 inch dia. Reel

10 = 10 inch dia. Reel

13 = 13 inch dia. Reel

(5) RESISTANCE VALUE

There are 2~4 digits indicated the resistor value. Letter R/K/M is decimal point, no need to mention the last zero after R/K/M, e.g. 1K2, not 1K20.

Detailed resistance rules show in table of "Resistance rule of global part number".

(6) OPTIONAL CODE

L = optional symbol (Note)

Resistance rule of global part number	
Resistance code rule	Example
0R	0R = Jumper
XRXX (1 to 9.76 Ω)	1R = 1 Ω 1R5 = 1.5 Ω 9R76 = 9.76 Ω
XXRX (10 to 97.6 Ω)	10R = 10 Ω 97R6 = 97.6 Ω
XXXXR (100 to 976 Ω)	100R = 100 Ω
XKXX (1 to 9.76 K Ω)	1K = 1,000 Ω 9K76 = 9760 Ω
XMXX (1 to 9.76 M Ω)	1M = 1,000,000 Ω 9M76 = 9,760,000 Ω

ORDERING EXAMPLE

The ordering code of a YCI64 convex chip resistor array, value 1,000 Ω with $\pm 5\%$ tolerance, supplied in 7-inch tape reel is: YCI64-JR-071K(L).

NOTE

1. All our RSMD products meet RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol printed and the optional "L" at the end of GLOBAL PART NUMBER / I2NC can be added (both are on customer request)

PHYCOMP BRAND ordering codes

Both GLOBAL PART NUMBER (preferred) and I2NC (traditional) codes are acceptable to order Phycomp brand products.

GLOBAL PART NUMBER (PREFERRED)

For detailed information of GLOBAL PART NUMBER and ordering example, please refer to page 2.

I2NC CODE

2350		XXX XXXXX L					Last digit of I2NC Resistance decade ⁽³⁾		Last digit
(1)		(2)	(3)	(4)					
TYPE/ 4×0603	START IN ⁽¹⁾	TOL. (%)	RESISTANCE RANGE	PAPER / PE TAPE ON REEL (units) ⁽²⁾					
				5,000	20,000				
ARV24I	2350	±5%	1 to 1 MΩ	035 10xxx	035 12xxx		0.01 to 0.0976 Ω		0
ARV242	2350	±1%	1 to 1 MΩ	025 1xxxx	025 3xxxx		0.1 to 0.976 Ω		7
ARC24I	2350	±5%	10 to 1 MΩ	034 10xxx	013 3xxxx		1 to 9.76 Ω		8
ARC242	2350	±1%	10 to 1 MΩ	024 1xxxx	013 3xxxx		10 to 97.6 Ω		9
Jumper	2350	-	0 Ω	ARV24I/YC164	035 91001	-	100 to 976 Ω		1
				ARC24I/TC164	034 91001	-	1 to 9.76 KΩ		2
							10 to 97.6 KΩ		3
							100 to 976 KΩ		4
							1 to 9.76 MΩ		5
							10 to 97.6 MΩ		6

(1) The resistors have a 12-digit ordering code starting with 2350.

(2) The subsequent 4 or 5 digits indicate the resistor tolerance and packaging.

(3) The remaining 4 or 3 digits represent the resistance value with the last digit indicating the multiplier as shown in the table of "Last digit of I2NC".

(4) "L" is optional symbol ^(Note).

Example:	0.02 Ω	=	0200 or 200
	0.3 Ω	=	3007 or 307
	1 Ω	=	1008 or 108
	33 KΩ	=	3303 or 333
	10 MΩ	=	1006 or 106

ORDERING EXAMPLE

The ordering code of a ARV24I resistor, value 1,000 Ω with ±5% tolerance, supplied in tape of 10,000 units per reel is: 235003510102(L) or YC164-JR-071K(L).

NOTE

1. All our RSMD products are RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol printed and the optional "L" at the end of GLOBAL PART NUMBER / I2NC can be added (both are on customer request)

MARKING

YC164

TC164




Fig. 1 Jumper=0Ω




Fig. 2 Jumper=0Ω

I-Digit marking




Fig. 3 Value = 240 KΩ




Fig. 4 Value = 240 KΩ

E-24 series: 3 digits

First two digits for significant figure and 3rd digit for number of zeros

For further marking information, please see special data sheet "Chip resistors marking"

CONSTRUCTION

The resistor is constructed on top of a high-grade ceramic body. Internal metal electrodes are added on each end to make the contacts to the thick film resistive element. The composition of the resistive element is a noble metal imbedded into a glass and covered by a second glass to prevent environment influences. The resistor is laser trimmed to the rated resistance value. The resistor is covered with a protective epoxy coat, finally the two external terminations (matte tin on Ni-barrier) are added. See fig.5

OUTLINES

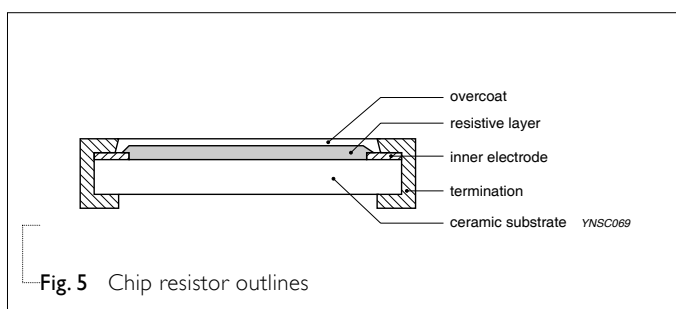


Fig. 5 Chip resistor outlines

DIMENSIONS

Table I

TYPE	YC164	TC164
B (mm)	0.30 ±0.15	0.30 ±0.15
H (mm)	0.65 ±0.05	---
H _I (mm)	0.50 ±0.15	---
P (mm)	0.80 ±0.05	0.80 ±0.05
L (mm)	3.20 ±0.15	3.20 ±0.15
T (mm)	0.60 ±0.10	0.60 ±0.10
W ₁ (mm)	0.30 ±0.15	0.30 ±0.15
W ₂ (mm)	1.60 ±0.15	1.60 ±0.15

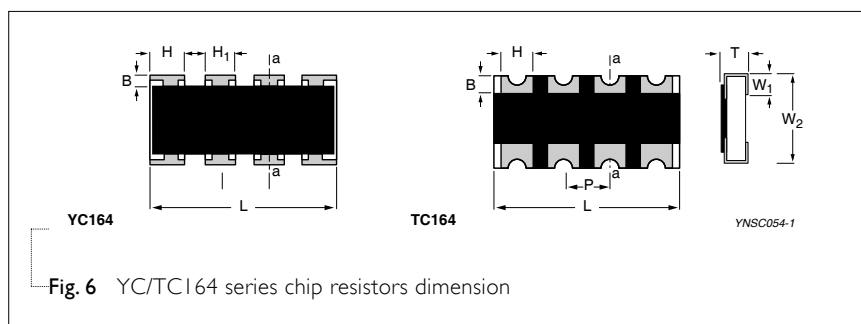


Fig. 6 YC/TC164 series chip resistors dimension

SCHEMATIC

For dimension see Fig. 6 and Table I

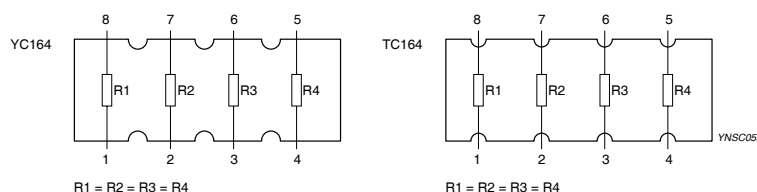


Fig. 7 Equivalent circuit diagram

ELECTRICAL CHARACTERISTICS

Table 2

CHARACTERISTICS		YC/TC164 1/16 W
Operating Temperature Range		-55 °C to +155 °C
Maximum Working Voltage		50 V
Maximum Overload Voltage		100 V
Dielectric Withstanding Voltage		100 V
Resistance Range 5% (E24), 1% (E24/E96)	YC164	1 Ω to 1 MΩ
	TC164	10 Ω to 1 MΩ
	Zero Ohm Jumper < 0.05 Ω	
Temperature Coefficient		±200 ppm/°C
Jumper Criteria	Rated Current	1.0 A
	Maximum Current	2.0 A

FOOTPRINT AND SOLDERING PROFILES

For recommended footprint and soldering profiles, please see the special data sheet "Chip resistors mounting".

PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

PRODUCT TYPE	PACKING STYLE	REEL DIMENSION	QUANTITY PER REEL
YC/TC164	Paper Taping Reel (R)	7" (178 mm)	5,000 units
		10" (254 mm)	10,000 units
		13" (330 mm)	20,000 units

NOTE

I. For paper tape and reel specification/dimensions, please see the special data sheet "Chip resistors packing".

FUNCTIONAL DESCRIPTION**POWER RATING**

YC/TC 164 rated power at 70 °C is 1/16 W

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

or max. working voltage whichever is less

Where

V=Continuous rated DC or
AC (rms) working voltage (V)

P=Rated power (W)

R=Resistance value (Ω)

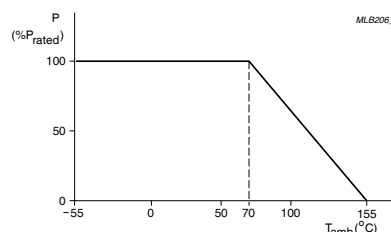


Fig. 8 Maximum dissipation (P) in percentage of rated power as a function of the operating ambient temperature (T_{amb})

TESTS AND REQUIREMENTS**Table 4** Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Life/ Operational Life/ Endurance	MIL-STD-202G-method 108A	1,000 hours at 70±5 °C applied RCWV	±(2%+0.05 Ω)
	IEC 60115-1 4.25.1	1.5 hours on, 0.5 hour off, still air required	<100 mΩ for Jumper
	JIS C 5202-7.10		
High Temperature Exposure/ Endurance at upper category temperature	MIL-STD-202G-method 108A	1,000 hours at maximum operating temperature	±(1%+0.05 Ω)
	IEC 60115-1 4.25.3	depending on specification, unpowered	<50 mΩ for Jumper
	JIS C 5202-7.11	No direct impingement of forced air to the parts Tolerances: 155±3 °C	
Moisture Resistance	MIL-STD-202G-method 106F	Each temperature / humidity cycle is defined at 8	±(2%+0.05 Ω)
	IEC 60115-1 4.24.2	hours (method 106F), 3 cycles / 24 hours for 10d	<100 mΩ for Jumper
		with 25 °C / 65 °C 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts Measurement at 24±2 hours after test conclusion	
Thermal Shock	MIL-STD-202G-method 107G	-55/+155 °C	±(0.5%+0.05 Ω) for 10 KΩ to 10 MΩ
		Note: Number of cycles required is 300. Devices unmounted	±(1%+0.05 Ω) for others
		Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air – Air	<50 mΩ for Jumper
Short time overload	MIL-R-55342D-para 4.7.5	2.5 times RCWV or maximum overload voltage	±(2%+0.05 Ω)
	IEC60115-1 4.13	whichever is less for 5 sec at room temperature	<50 mΩ for Jumper
			No visible damage
Board Flex/ Bending	IEC60115-1 4.33	Device mounted on PCB test board as described,	±(1%+0.05 Ω)
		only 1 board bending required	<50 mΩ for Jumper
		3 mm bending Bending time: 60±5 seconds Ohmic value checked during bending	No visible damage

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Solderability			
- Wetting	IPC/JEDECJ-STD-002B test B IEC 60068-2-58	Electrical Test not required Magnification 50X SMD conditions: 1 st step: method B, aging 4 hours at 155 °C dry heat 2 nd step: leadfree solder bath at 245±3 °C Dipping time: 3±0.5 seconds	Well tinned (≥95% covered) No visible damage
- Leaching	IPC/JEDECJ-STD-002B test D IEC 60068-2-58	Leadfree solder, 260 °C, 30 seconds immersion time	No visible damage
- Resistance to Soldering Heat	MIL-STD-202G-method 210F IEC 60068-2-58	Condition B, no pre-heat of samples Leadfree solder, 270 °C, 10 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	±(1%+0.05 Ω) <50 mΩ for Jumper No visible damage

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 3	Oct 27, 2008	-	- Change to dual brand datasheet that describes YC/TC I 64 with RoHS compliant - Description of "Halogen Free Epoxy" added - Define global part number
Version 2	Mar 01, 2005	-	- Test method and procedure updated - TC I 64, the concave chip resistor arrays combined
Version 1	Apr. 22, 2004	-	- 13" taping and Jumper added, delete G in ordering code, and test & requirement (Pb free) updated
Version 0	Nov. 10, 2003	-	- First issue of this specification

“ Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN.”

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [yageo](#) manufacturer:

Other Similar products are found below :

PHH2-KIT	PHH6-KIT	PR03/15K	AC0603FR-07330KL	AC0603JR-07100KL	MRS25/470R/1	2238-580-15648	2238-580-16618	2238-586-
15639	2238-586-15641	2238-586-15646	2238-586-15648	2238-587-15623	2238-861-15108	2238-861-15121	2238-861-15129	2238-861-
15689	2238-863-55331	2238-867-15128	2238-867-15181	2238-867-15479	2238-867-15561	2238-867-15621	2322-702-60229	2322-702-
60271	2322-702-60683	2322-704-61101	2322-704-61109	2322-704-61209	2322-704-61303	2322-704-61604	2322-704-62202	2322-704-
62209	2322-704-62404	2322-704-62702	2322-704-62942	2322-704-63012	2322-704-64303	2322-704-65492	2322-704-66202	2322-704-
66204	2322-704-67501	2322-704-68201	2322-711-41301	2322-711-61109	2322-711-61124	2322-711-61223	2322-711-61229	2322-711-
61272	2322-711-61339							