



Dimensions: dimensions are in mm

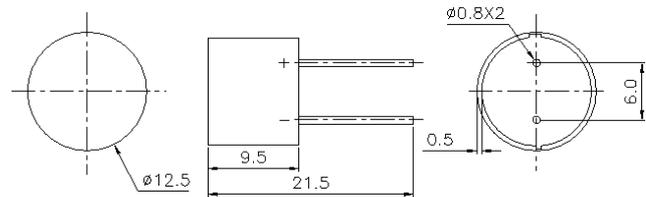

Impedance/Phase Angle vs. Frequency
Tested under 1Vrms Oscillation Level

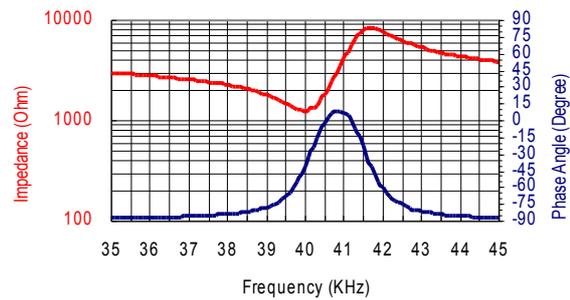

Specification


400EP125	Transceiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB)	400EP125 1.5Khz
Transmitting Sound Pressure Level (with rubber sleeve)	100dB min.
at resonant frequency;0dB re 0.0002µbar per 10Vrms at 30cm	
Receiving Sensitivity (with rubber sleeve)	-78dB min.
at resonant frequency 0dB = 1 volt/µbar	
Nominal Impedance (Ohm)	1000
Ringing (ms) @25°C	1.2 max.
Capacitance at 1Khz	±20% 1400 pF
Max. Driving Voltage	100Vpp
20 bursts, 25ms repetition rate	
Total Beam Angle	-6dB 108°
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Models of less ringing are available


Models available:

1	400EP125	Natural Aluminum Housing
2	400EP125B	Black Painted Housing
3	400EP125BR	Black Housing+Rubber Sleeve

Sensitivity/Sound Pressure Level
SPL Tested under 10Vrms@30cm

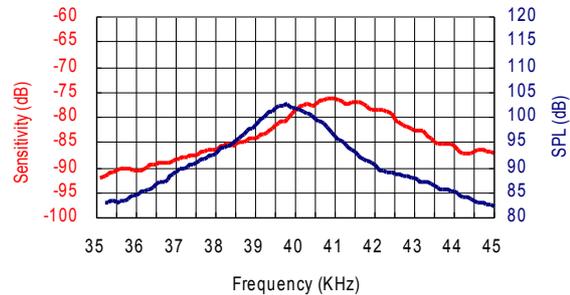

Beam Angle: Tested at 40.0Khz frequency

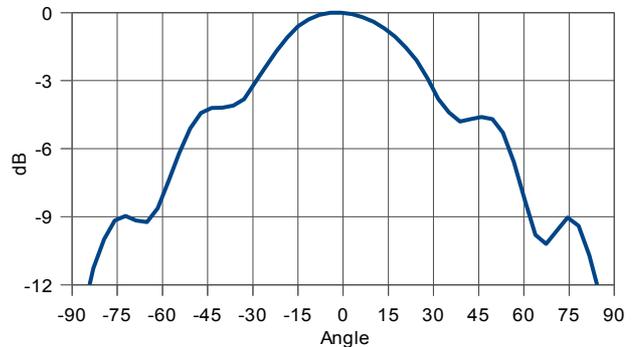

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [prowave](#) manufacturer:

Other Similar products are found below :

[400SR120](#) [400ST100](#) [FS-2513P](#) [328ER250](#) [M165D25](#) [400SR10B](#) [K4000001](#) [400SR160](#) [400ST120](#) [400EP18A](#) [500MB120](#) [K4000005](#)
[K4000004](#) [400PT160](#)