



ACTUATOR-/INDICATOR COMPONENT WITH
INTEGRATED LED 24V AC/DC LAMP HOLDER SCREW
TERMINAL RED

Contact block/ lampholder:

Product designation		lampholder
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Product function / positive opening		No
Number of lampholders		1
Execution of the mounting		integrated
Nature of fluorescent material		LED
Color / of the fluorescent material		red
Design of the electrical connection		screw-type terminals

General technical details:

Degree of pollution		class 3
Type of voltage / of the supply voltage / of light source		AC/DC
Supply voltage / 1 / of the fluorescent material		
• at 60 Hz / for AC / rated value	V	24
• at 50 Hz / for AC / rated value	V	24
• for DC / rated value	V	24
Voltage type / of operating voltage		AC/DC
Reference code		

• according to DIN EN 61346-2 • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		P H
Ambient temperature		
• during operating • during storage	°C °C	-25 ... +70 -25 ... +80
protection type IP		
• of the terminal • of the enclosure		IP20 IP40
Operating voltage / 1 / at 50 Hz / for AC / rated value	V	24
Operating voltage / 1 / at 60 Hz / for AC / rated value	V	24
Operating voltage		
• 1 / for DC / rated value • at 50 Hz / at AC / rated value • at 60 Hz / at AC / rated value • for DC • rated value	V V V V	24 21.6 ... 26.4 21.6 ... 26.4 21.6 ... 26.4
Suitability for integration		
• pressure selection button • front element • suspension switch • suspension pushbutton		front element Yes Yes Yes Yes
Insulation voltage / rated value	V	250
Impulse voltage resistance / rated value	kV	4
Tightening torque / for auxiliary contacts / with screw-type terminals	N·m	0.8
Product component		
• fluorescent materials • diode • lamp transformer • series resistance		Yes Yes No No
Mounting type		front mounting

Connections:

Type of the connectable conductor cross-section

• for auxiliary contacts / solid	2x (1.0 ... 1.5 mm²)
• for auxiliary contacts / solid / with conductor end processing	2x (0.5 ... 0.75 mm²)
• for auxiliary contacts / finely stranded / with conductor end processing	2x (0.5 ... 1.5 mm²)
• for AWG conductors / for auxiliary contacts	2x (18 ... 14)

Certificates/approvals:

General Product Approval



CCC



CSA

Declaration of Conformity



EG-Konf.

Test Certificates

[Special Test
Certificate](#)

other

[Confirmation](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB3400-1PB/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3400-1PB

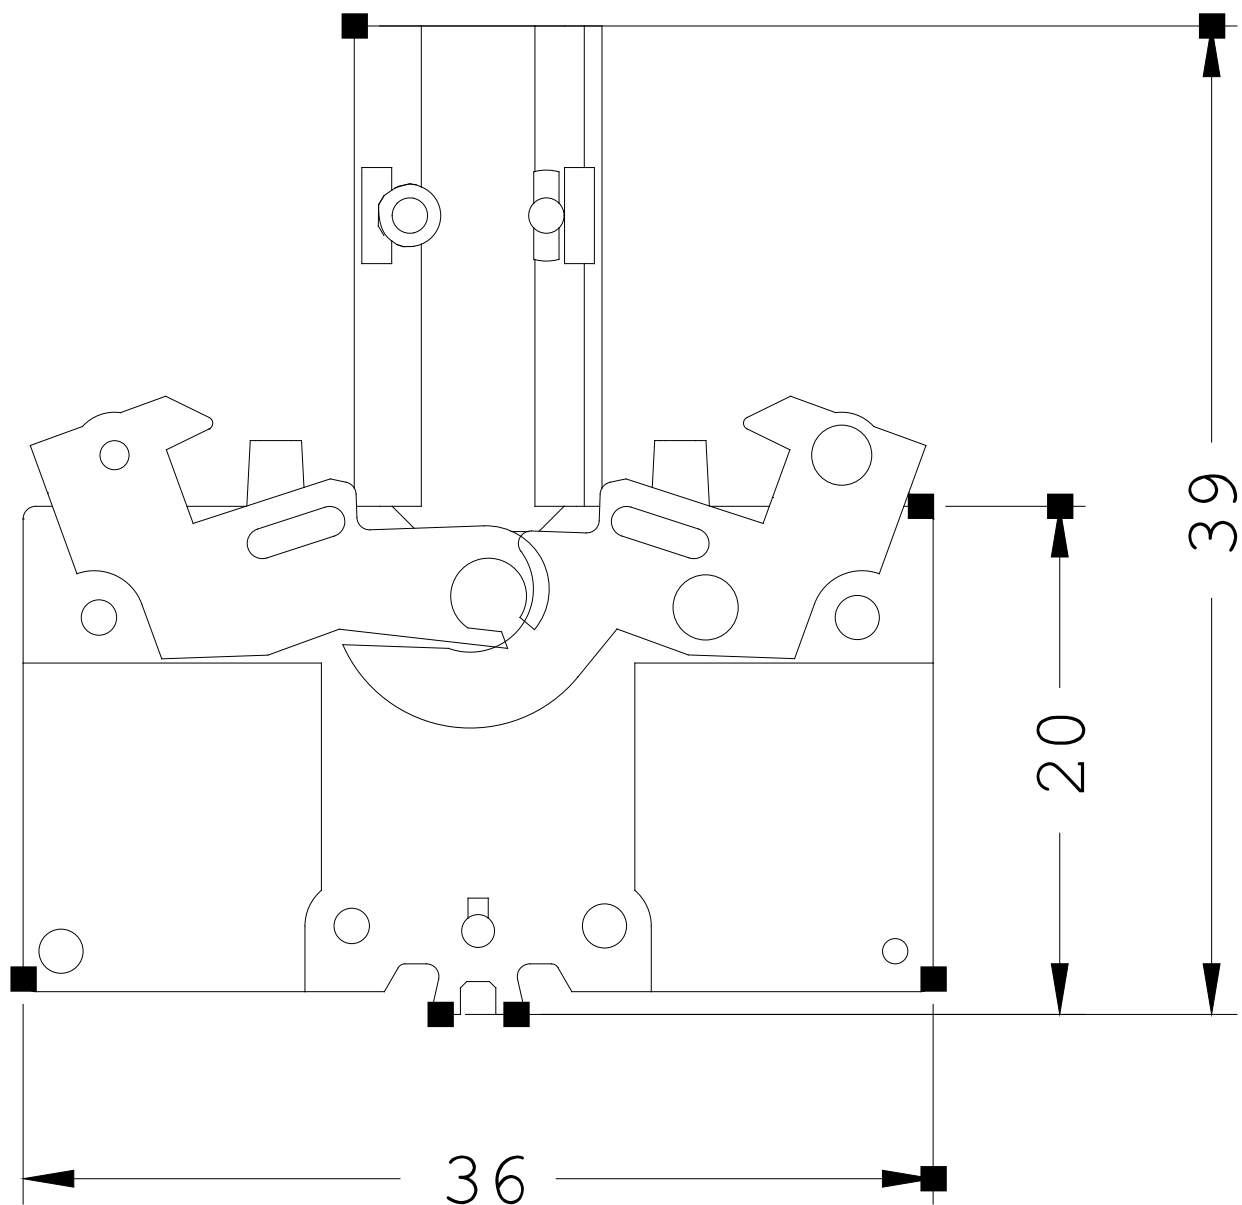

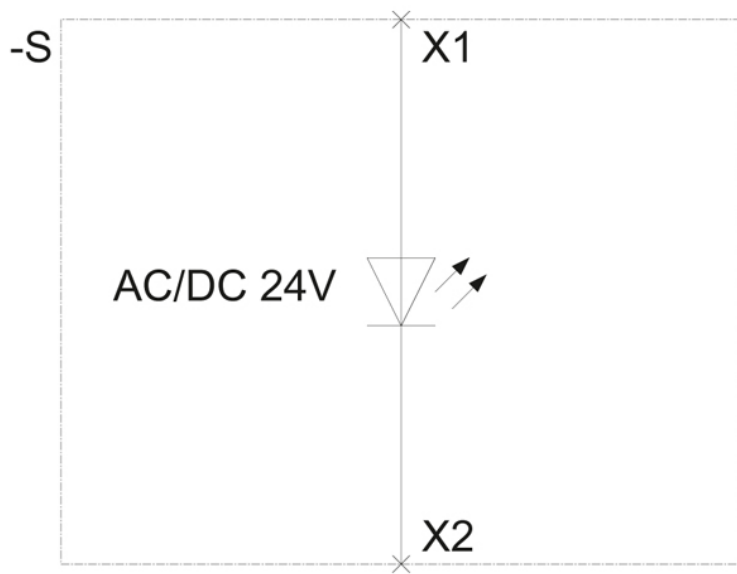

last change:

Mar 17, 2014

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switch Hardware](#) category:

Click to view products by [Siemens](#) manufacturer:

Other Similar products are found below :

[893102000](#) [LZZ1A](#) [0098.9234](#) [61-9707.7](#) [61-9771.0](#) [M2PA-5011](#) [635401](#) [6PA104](#) [6PA113](#) [6PA147-E6](#) [6PA148-E6](#) [6PA32](#) [6PA9](#) [700106](#)
[700109](#) [700201A56](#) [700303A56](#) [700701264](#) [700C1GRY](#) [700C2GRN](#) [704-6001](#) [704.960.4](#) [704.960.9](#) [704.965.1](#) [704.965.2](#) [704.965.6](#)
[704.966.0](#) [7089-3](#) [71M1048](#) [757200264](#) [778000A56](#) [79215938](#) [MHU35](#) [MHU37](#) [825.003.011](#) [825.005.011](#) [825.053.011](#) [825.055.011](#)
[826.000.071](#) [827.020.011](#) [827.400.021](#) [835.900.023](#) [MML52C10C](#) [MML52E10C](#) [MML72EEK](#) [MML92HGH](#) [MML93K](#) [84211M02CNNS](#)
[84211M02LGRS](#) [84211M02LNNX3](#)