


Spectra-Zip Slit Zip Planar Cable

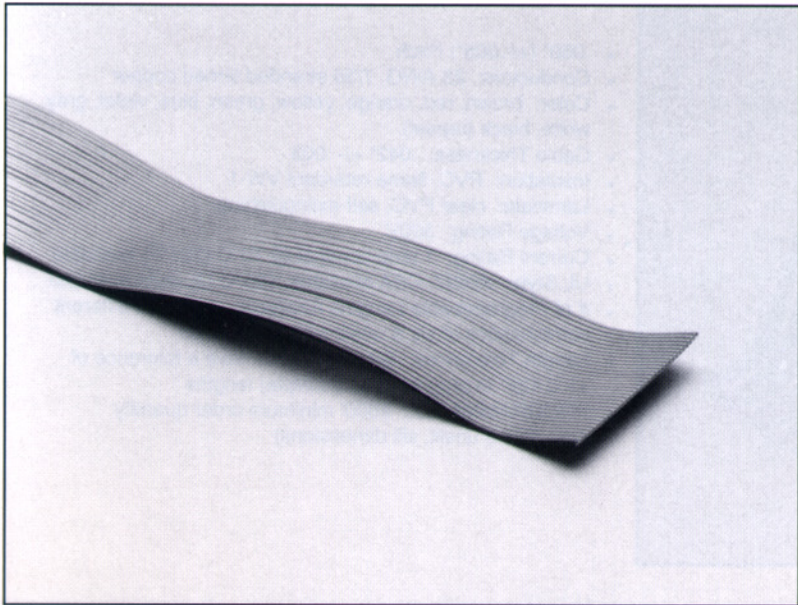

Characteristics

- .050" (+/- .002") Pitch
- Conductors: 28 AWG, 7/36 strand tinned copper
- Color: gray (one edge red)
- .050" Pitch Cable Thickness: .035" +/- .003"
- Insulation: PVC, flame retardant VW-1
- Voltage Rating: 300V
- Current Rating: 1 amp nominal@ 10°C
- Temperature Rating: -20°C to 105°C (-4°F to 221°F)
- UL Style: #2651, CSA available
- # of Programmable Lengths Available; up to five different combinations of slit & unslit within one cable
- Length Tolerances: .125" on slit & unslit lengths
- Minimum Slit Length: 0.75"
- Minimum Unslit Length: 0.75"
- Other Capabilities:
 - .025" center cable, slit every two conductors
 - .050" center cable, slit every two conductors
 - other gauges and strands available
 - Fixed: 1000' minimum order quantity
 - 3/4" unslit, 3/4 slit, repeat 3/4" unslit, 1 1/2" slit, repeat
 - 1" unslit, 1 3/4" slit, repeat 1 1/2" unslit, 4" slit, repeat
 - PROGRAMMABLE: 5000' minimum order quantity
 - (You define unslit, slit dimensions)

Ordering Information:

Overall put-up length: _____ Measure in: feet ☐ meters ☐

Slit: Every conductor ☐ AWG: _____ # of conductors: _____
Every two conductors ☐ Strand: _____
Spacing: _____

Slit length measure in: inches ☐ mm ☐

Indicate each unslit and slit length in spaces below.
Write in "repeat", if appropriate.

Unslit	Slit	Unslit	Slit	Unslit	Slit
--------	------	--------	------	--------	------

Date _____

This request for pricing is made by:

Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone No. (_____) _____

Fax No. (_____) _____

Comments: _____

Copy & Fax to: Cable Marketing Manager

Amphenol
SPECTRA-STRIP

Fax: (203) 281-5872
Phone: (203) 281-3200
(800) 846-6400

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ribbon Cables / IDC Cables](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[FSK-12A](#) [Ribbon Cable, 6 Pin, 500mm](#) [AWG28-10G](#) [EHJ3C](#) [EHJ4C](#) [EHJ5C](#) [cab-LVDV-PWR-10-15](#) [FSP-25A](#) [Ribbon Cable, 4 Pin, 350mm](#)
[Ribbon Cable, 6 Pin, 300mm](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [100063-0094](#) [100063-0106](#) [100063-0102](#)
[100063-0104](#) [MMSD-02-20C-F-15.00-S-K](#) [100063-0099](#) [100063-0105](#) [100063-0095](#) [100063-0103](#) [100063-0093](#) [100063-0091](#) [2200000068](#)
[100063-0092](#) [100063-0101](#) [100063-0100](#) [100063-0097](#) [TFSDT-08-28-H-15.00-S](#) [S1SD-02-30-GF-09.00-L](#) [MMSD-02-22C-F-15.00-S-K](#)
[S1SS-02-28C-GF-02.00-L](#) [S1SDT-02-28-GF-03.00-L](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [TCSD-22-D-26.00-01](#) [S1SST-07-30-](#)
[GF-06.00-L](#) [T2SD-20-24-L-07.87-TR-NUS](#) [DS1057-01-44A282R-30.5](#) [FFSD-06-S-17.00-01-N](#) [IDSS-03-D-20.00-T](#) [TCMD-17-S-36.00-01-](#)
[SR](#) [92301-0718](#) [839023](#) [490107670612S](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#)