


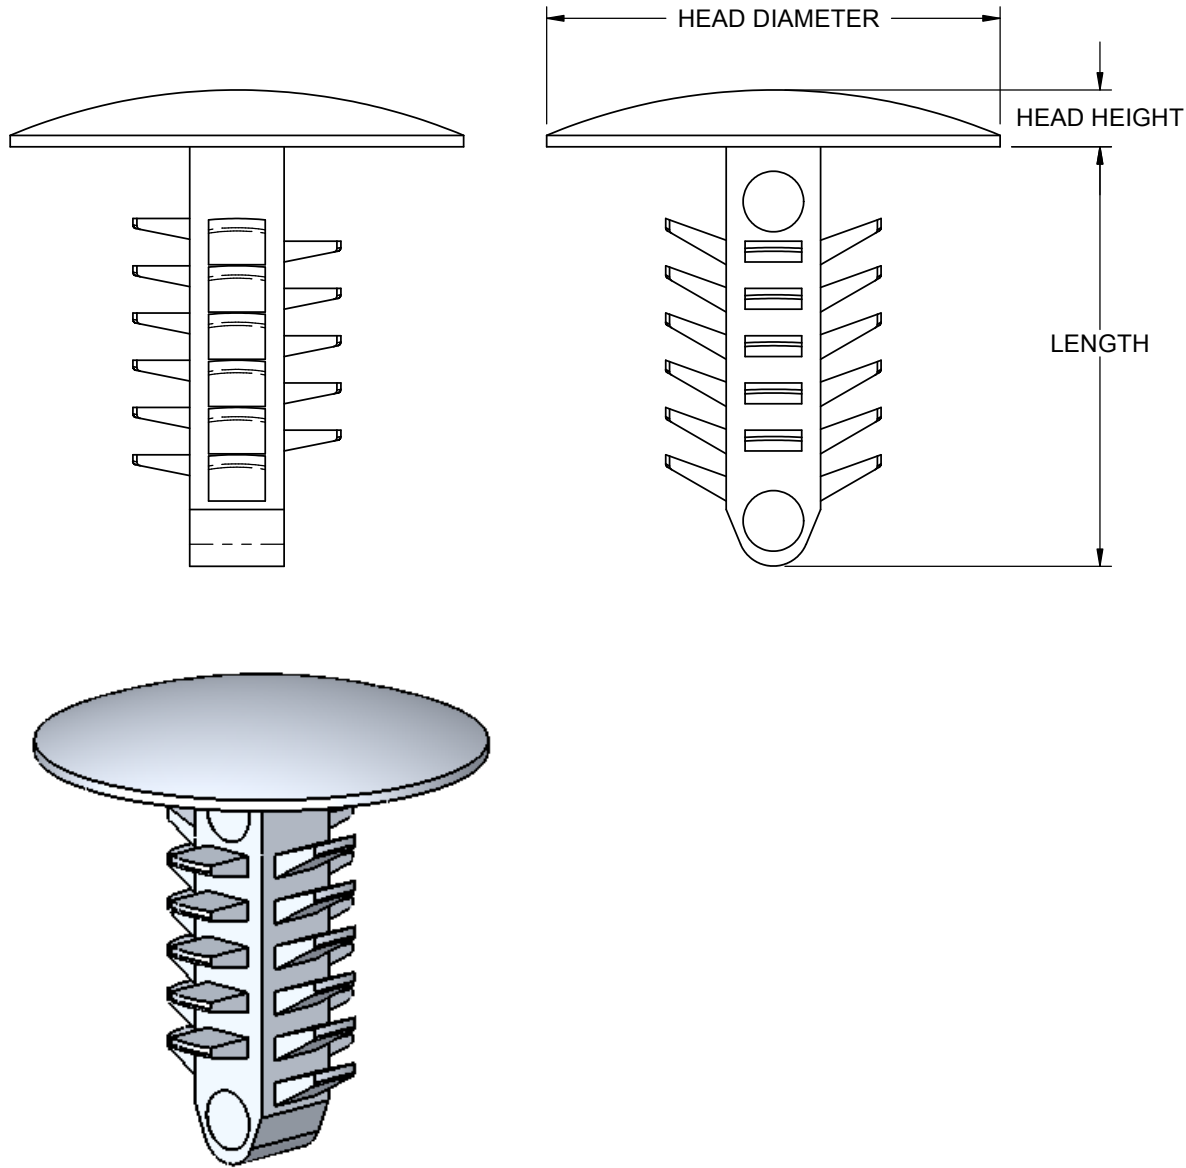

NOTES:
1. MATERIAL: NYLON 6/6 (RMS-01).
FLAME RETARDANT NYLON (RMS-19)
AVAILABLE BY SPECIAL ORDER.
2. COLOR: BLACK.
NATURAL BY SPECIAL ORDER

B	SEE ECN # 917 FOR CHANGES	SK	01/18/05
A	RELEASED FOR PRODUCTION	SM	10/19/04
REV.	DESCRIPTION	ENGR.	DATE

PART NO.	HOLE DIAMETER ±.003 [0.08]	HEAD DIAMETER	SUGGESTED TOTAL BOARD THICKNESS	HEAD HEIGHT	LENGTH
RBF-4-8.6-8	.157(4.00)	.32(8.0)	.08-.17(2.1-4.3)	.04(1.0)	.34(8.6)
RBF-4-11.1-8			.08-.28(2.1-7.2)		.44(11.1)
RBF-4-15-8			.22-.42(5.7-10.7)		.59(15.0)
RBF-4-8.6-12		.47(12.0)	.08-.17(2.1-4.3)	.06(1.5)	.34(8.6)
RBF-4-11.1-12			.08-.28(2.1-7.2)		.44(11.1)
RBF-4-15-12			.22-.42(5.7-10.7)		.59(15.0)
RBF-4-8.6-16		.63(16.0)	.08-.17(2.1-4.3)	.08(2.0)	.34(8.6)
RBF-4-11.1-16			.08-.28(2.1-7.2)		.44(11.1)
RBF-4-15-16			.22-.42(5.7-10.7)		.59(15.0)
RBF-4.8-8.6-8	.188(4.76)	.32(8.0)	.08-.17(2.1-4.3)	.04(1.0)	.34(8.6)
RBF-4.8-11.1-8			.08-.28(2.1-7.2)		.44(11.1)
RBF-4.8-15-8			.22-.42(5.7-10.7)		.59(15.0)
RBF-4.8-8.6-12		.47(12.0)	.08-.17(2.1-4.3)	.06(1.5)	.34(8.6)
RBF-4.8-11.1-12			.08-.28(2.1-7.2)		.44(11.1)
RBF-4.8-15-12			.22-.42(5.7-10.7)		.59(15.0)
RBF-4.8-8.6-16		.63(16.0)	.08-.17(2.1-4.3)	.08(2.0)	.34(8.6)
RBF-4.8-11.1-16			.08-.28(2.1-7.2)		.44(11.1)
RBF-4.8-15-16			.22-.42(5.7-10.7)		.59(15.0)
RBF-6.4-8.6-8	*.250(6.35)	.32(8.0)	.08-.17(2.1-4.3)	.04(1.0)	.34(8.6)
RBF-6.4-11.1-8			.08-.28(2.1-7.2)		.44(11.1)
RBF-6.4-15-8			.22-.42(5.7-10.7)		.59(15.0)
RBF-6.4-8.6-12		.47(12.0)	.08-.17(2.1-4.3)	.06(1.5)	.34(8.6)
RBF-6.4-11.1-12			.08-.28(2.1-7.2)		.44(11.1)
RBF-6.4-15-12			.22-.42(5.7-10.7)		.59(15.0)
RBF-6.4-8.6-16		.63(16.0)	.08-.17(2.1-4.3)	.08(2.0)	.34(8.6)
RBF-6.4-11.1-16			.08-.28(2.1-7.2)		.44(11.1)
RBF-6.4-15-16			.22-.42(5.7-10.7)		.59(15.0)
RBF-7.1-11.1-8	*.281(7.14)	.32(8.0)	.08-.28(2.1-7.2)	.04(1.0)	.44(11.1)
RBF-7.1-15-8			.15-.42(3.8-10.7)		.59(15.0)
RBF-7.1-19-8			.27-.56(6.9-14.2)		.75(19.0)
RBF-7.1-11.1-12		.47(12.0)	.08-.28(2.1-7.2)	.06(1.5)	.44(11.1)
RBF-7.1-15-12			.15-.42(3.8-10.7)		.59(15.0)
RBF-7.1-19-12			.27-.56(6.9-14.2)		.75(19.0)
RBF-7.1-11.1-16		.63(16.0)	.08-.28(2.1-7.2)	.08(2.0)	.44(11.1)
RBF-7.1-15-16			.15-.42(3.8-10.7)		.59(15.0)
RBF-7.1-19-16			.27-.56(6.9-14.2)		.75(19.0)

* FOR USE IN METAL, LEADING EDGE OF HOLE MUST BE BROKE

TITLE: BARBED PUSH FASTENER						DWG IN IN [MM]	
CREATED USING SOLIDWORKS	FILE #: RBF		DWN: D.J.Z.	APP: DJZ		FINAL	
TOLERANCES UNLESS NOTED .XX=±.01 .XXX=±.005 FRAC.=±1/64 ANG.=±1°	SHEET: 1 OF 1		SHEET SIZE: B		DT: 06/09/2004	CHKD: SJ	PART #
	RE: RICHCO INC.		RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060		SEE TABLE		PRINT TYPE CA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [Richco](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [593503FX](#) [0098.0094](#) [0098.9206](#) [0098.9219](#) [0098.9221](#) [0098.9262](#) [596-2114-013](#) [59781-4](#) [59781-6](#) [0098.0026](#)
[0098.9210](#) [0098.9212](#) [60227-01](#) [60227-04](#) [60227-08](#) [60228-09](#) [618-00001](#) [62153-03](#) [62153-11](#) [M316-KSSTMCZ100](#) [M3440-SS](#) [M3442-](#)
[SS](#) [M3448-SS](#) [6291A](#) [6292-1](#) [6-306105-9](#) [6-306131-4](#) [690432-1](#) [699161-000](#) [700989](#) [7-18023-1](#) [7-21002-8](#) [7230-3](#) [7235-3](#) [7248-1](#) [7248-2](#)
[73542-02](#) [CAPTIVE SHORT THUMBSCREW](#) [745564-1](#) [748174-2](#) [F03-02](#) [SUS316](#) [F1209](#) [751-00001](#) [80011](#) [809704-1](#) [8700](#) [8860220](#)
[9047](#) [95000002B](#) [9885-2](#)