

**BCY78, VII, VIII, IX, X  
BCY79, VII, VIII, IX, X**

**SILICON  
PNP TRANSISTORS**



[www.centralsemi.com](http://www.centralsemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BCY78 and BCY79 series types are silicon PNP epitaxial planar transistors, mounted in a hermetically sealed metal case, designed for low noise amplifier and switching applications.



**TO-18 CASE**

**MAXIMUM RATINGS: (T<sub>A</sub>=25°C unless otherwise noted)**

	<b>SYMBOL</b>	<b>BCY78</b>	<b>BCY79</b>	<b>UNITS</b>
Collector-Base Voltage	V <sub>CBO</sub>	32	45	V
Collector-Emitter Voltage	V <sub>CEO</sub>	32	45	V
Emitter-Base Voltage	V <sub>EBO</sub>	5.0		V
Continuous Collector Current	I <sub>C</sub>	100		mA
Peak Collector Current	I <sub>CM</sub>	200		mA
Peak Base Current	I <sub>BM</sub>	200		mA
Power Dissipation	P <sub>D</sub>	340		mW
Power Dissipation (T <sub>C</sub> =25°C)	P <sub>D</sub>	1.0		W
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 to +200		°C
Thermal Resistance	Θ <sub>JA</sub>	450		°C/W
Thermal Resistance	Θ <sub>JC</sub>	150		°C/W

**ELECTRICAL CHARACTERISTICS: (T<sub>A</sub>=25°C unless otherwise noted)**

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>		<b>MAX</b>		<b>UNITS</b>
		<b>MIN</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>	
I <sub>CBO</sub>	V <sub>CB</sub> =Rated V <sub>CBO</sub>			15		nA
I <sub>CBO</sub>	V <sub>CB</sub> =Rated V <sub>CBO</sub> , T <sub>A</sub> =150°C			10		µA
I <sub>EBO</sub>	V <sub>EB</sub> =5.0V			20		nA
BV <sub>CBO</sub>	I <sub>C</sub> =10µA (BCY78)	32				V
BV <sub>CBO</sub>	I <sub>C</sub> =10µA (BCY79)	45				V
BV <sub>CEO</sub>	I <sub>C</sub> =2.0mA (BCY78)	32				V
BV <sub>CEO</sub>	I <sub>C</sub> =2.0mA (BCY79)	45				V
BV <sub>EBO</sub>	I <sub>E</sub> =1.0µA	5.0				V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =250µA			0.25		V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =100mA, I <sub>B</sub> =2.5mA			0.80		V
V <sub>BE(SAT)</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =250µA	0.60		0.85		V
V <sub>BE(SAT)</sub>	I <sub>C</sub> =100mA, I <sub>B</sub> =2.5mA	0.70		1.20		V
V <sub>BE(ON)</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =2.0mA	0.60		0.75		V

	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10µA	<b>BCY78-VII</b>		<b>BCY78-VIII</b>		<b>BCY78-IX</b>		<b>BCY78-X</b>	
		<b>BCY79-VII</b>		<b>BCY79-VIII</b>		<b>BCY79-IX</b>		<b>BCY79-X</b>	
		<b>MIN</b>	<b>TYP</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>	<b>MIN</b>
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10µA	-	140	-	30	-	40	-	100
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =2.0mA	120	-	220	180	310	250	460	380
h <sub>FE</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =10mA	80	-	-	120	400	160	630	240
h <sub>FE</sub>	V <sub>CE</sub> =1.0V, I <sub>C</sub> =100mA	40	-	-	45	-	60	-	60

R4 (4-June 2013)


BCY78, VII, VIII, IX, X  
BCY79, VII, VIII, IX, X

SILICON  
PNP TRANSISTORS

ELECTRICAL CHARACTERISTICS - Continued: ( $T_A=25^\circ C$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$f_T$	$V_{CE}=5.0V$ , $I_C=10mA$ , $f=100MHz$	100		MHz
$C_{ob}$	$V_{CB}=10V$ , $I_E=0$ , $f=1.0MHz$		7.0	pF
$C_{ib}$	$V_{EB}=0.5V$ , $I_C=0$ , $f=1.0MHz$		15	pF
NF	$V_{CE}=5.0V$ , $I_C=0.2mA$ , $R_S=2.0k\Omega$ , $f=1.0kHz$ , $B=200Hz$		10	dB
$t_{on}$	$V_{CC}=3.0V$ , $I_C=10mA$ , $I_{B1}=I_{B2}=1.0mA$		100	ns
$t_d$	$V_{CC}=3.0V$ , $I_C=10mA$ , $I_{B1}=I_{B2}=1.0mA$		50	ns
$t_r$	$V_{CC}=3.0V$ , $I_C=10mA$ , $I_{B1}=I_{B2}=1.0mA$		50	ns
$t_{off}$	$V_{CC}=3.0V$ , $I_C=10mA$ , $I_{B1}=I_{B2}=1.0mA$		700	ns
$t_s$	$V_{CC}=3.0V$ , $I_C=10mA$ , $I_{B1}=I_{B2}=1.0mA$		600	ns
$t_f$	$V_{CC}=3.0V$ , $I_C=10mA$ , $I_{B1}=I_{B2}=1.0mA$		100	ns
$t_{on}$	$V_{CC}=10V$ , $I_C=100mA$ , $I_{B1}=I_{B2}=10mA$		100	ns
$t_d$	$V_{CC}=10V$ , $I_C=100mA$ , $I_{B1}=I_{B2}=10mA$		35	ns
$t_r$	$V_{CC}=10V$ , $I_C=100mA$ , $I_{B1}=I_{B2}=10mA$		65	ns
$t_{off}$	$V_{CC}=10V$ , $I_C=100mA$ , $I_{B1}=I_{B2}=10mA$		400	ns
$t_s$	$V_{CC}=10V$ , $I_C=100mA$ , $I_{B1}=I_{B2}=10mA$		300	ns
$t_f$	$V_{CC}=10V$ , $I_C=100mA$ , $I_{B1}=I_{B2}=10mA$		100	ns

TO-18 CASE - MECHANICAL OUTLINE

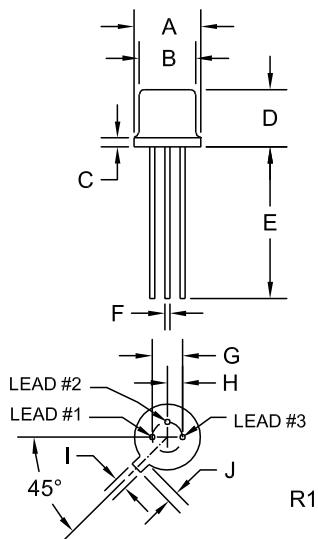

SYMBOL	DIMENSIONS			
	INCHES	MILLIMETERS	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100	-	2.54	-
H	0.050	-	1.27	-
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING:

FULL PART NUMBER

R4 (4-June 2013)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centralsemi.com](http://www.centralsemi.com)

**Worldwide Field Representatives:**  
[www.centralsemi.com/wwreps](http://www.centralsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centralsemi.com/wwdistributors](http://www.centralsemi.com/wwdistributors)

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centralsemi.com/terms](http://www.centralsemi.com/terms)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by Central Semiconductor manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)