

PRODUCT DATASHEET

P CLAS A 100 14 W/2700 K E27

PARATHOM CLASSIC A DIM | Dimmable LED lamps, classic bulb shape



AREAS OF APPLICATION

- Domestic applications
- General illumination
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Very long lifetime of up to 25,000 h
- Low energy consumption
- High color consistency thanks to narrow binning
- Easy replacement of classic lamps thanks to compact design
- Instant 100 % light, no warm-up time

PRODUCT FEATURES

- LED alternative to conventional lamps
- Good quality of light; color rendering index $R_a: \geq 80$; constant chromaticity
- High color consistency: < 6 SDCM
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Mercury-free lamps



TECHNICAL DATA

Electrical data

Rated wattage	14.00 W
Nominal wattage	14.00 W
Nominal voltage	220...240 V
Operating frequency	50...60 Hz
Power factor λ	> 0.80
Claimed equiv. conventional lamp power	100 W


Photometrical data

Nominal luminous flux	1521 lm
Rated luminous flux	1521 lm
Rated color temperature	2700 K
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	1521 lm
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 6 sdc _m
Color rendering index Ra	≥ 80

Light technical data

Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s

Dimensions & weight



Overall length	134.0 mm
Diameter	70.0 mm
Outer bulb	A60

Length	134.0 mm
---------------	----------

Lifespan

Nominal lamp life time	25000 h
Rated lamp life time	25000 h
Number of switching cycles	100000
Lumen maintenance at end of service life	0.70

Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted
Show WEEE picto	Yes
Product remark	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

Dimmable	Yes
-----------------	-----


Certificates & standards

Energy efficiency class	A+
Energy consumption	14 kWh/1000h

Country-specific categorizations

ILCOS	DRAA/F-14,5/840-220-240-E27-60
Order reference	LEDPCLA100D 14W

Light Distribution

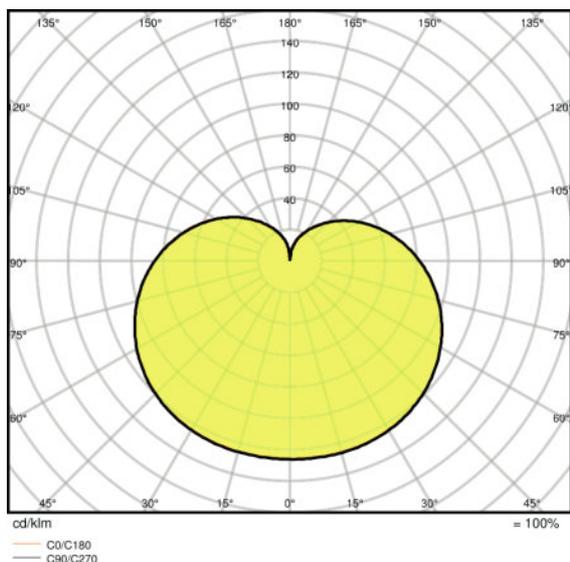

LDC typ polar

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075101098	P CLAS A 100 14 W/2700 K E27	Shipping carton box 10	315 mm x 131 mm x 134 mm	5.53 dm ³	1360.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For dimming conformity see

- ▶ www.ledvance.com/dim

For further products and actual information concerning LED lamps see

- ▶ www.ledvance.com/ledlamps

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Backlighting](#) category:

Click to view products by [Osram](#) manufacturer:

Other Similar products are found below :

[HBL0218](#) [SSB-COB7540GW](#) [SSB-DL6528SRW](#) [3G3DV130B4294](#) [SSB-CEL8040UWW](#) [4052899961654](#) [49131](#) [0025 INT CLASSIC](#)
[GLACIER WHITE](#) [0025 INT NATURAL BLUE](#) [0100 INT CLASSIC GLACIER WHITE](#) [0100 INT EXTREME ORANGE](#) [0100 INT](#)
[NATURAL BLUE](#) [0200 INT EXTREME BLUE GREEN](#) [30531](#) [30586](#) [30588](#) [30589](#) [30590](#) [30637](#) [4052899149281](#) [4052899326453](#)
[44865WFL](#) [JDR20W38 E14](#) [JDR50W38 GU10](#) [KB-2600ID](#) [KB-2855SGW](#) [4052899913615](#) [L-875/4IDT](#) [L-875/4SRDT](#) [44860WFL](#)
[44870WFL](#) [MR16 60ST 20W](#) [MR16 60ST 50W](#) [64465](#) [64695 ECO](#) [64698 ECO](#) [64701 ECO](#) [64702 ECO](#) [64760](#) [30597](#) [SL2CD](#) [SKU 165](#)
[SKU 167](#) [SKU 193](#) [SKU 194](#) [SKU 203](#) [4052899973428](#) [8718696497586](#) [8718696537015](#) [8718696728352](#)