



快恢复二极管 Fast Recovery Rectifier

■特征 Features

- I_o 2.0A
- VRRM 50V-1000V
- 耐正向浪涌电流能力高
- High surge current capability


■用途 Applications

- 整流用 Rectifier

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

■外形尺寸和印记 Outline Dimensions and Mark

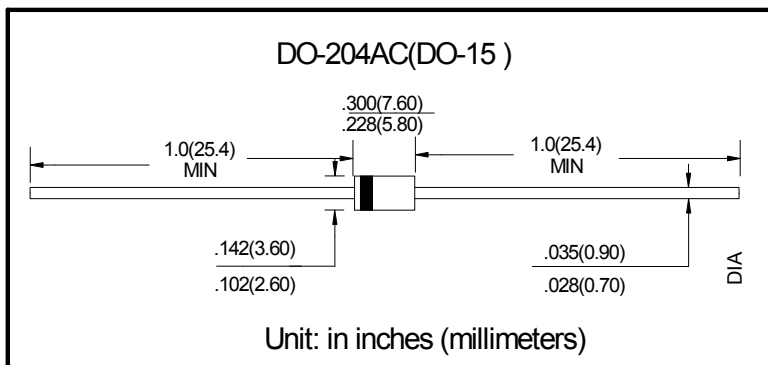

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	FR						
				201	202	203	204	205	206	207
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz,电阻负载, $T_a=50^{\circ}C$ 60Hz Half-sine wave, Resistance load, $T_a=50^{\circ}C$	2						
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	正弦半波 60Hz, 一个周期, $T_a=25^{\circ}C$ 60Hz Half-sine wave, 1 cycle, $T_a=25^{\circ}C$	60						
结温 Junction Temperature	T_J	$^{\circ}C$		-55~+125						
储存温度 Storage Temperature	T_{STG}	$^{\circ}C$		-55 ~ +150						

■电特性（ $T_a=25^{\circ}C$ 除非另有规定）Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition		FR						
					201	202	203	204	205	206	207
正向峰值电压 Peak Forward Voltage	V _{FM}	V	I _{FM} =2.0A		1.3						
反向峰值电流 Peak Reverse Current	I _{RRM1}	μA	V _{RM} =V _{RRM}	T _a =25℃	2.5						
	I _{RRM2}			T _a =125℃	100						
反向恢复时间 Reverse Recovery time	t _{rr}	ns	I _F =0.5A I _R =1A I _{RR} =0.25A		150			250		500	
热阻(典型) Thermal Resistance(Typical)	R _{θJ-A}	℃/W	结和环境之间 Between junction and ambient		40						
结电容 Typical junction capacitance	Cj	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.		40						

■特性曲线（典型） Characteristics(Typical)

FIG.1 正向电流降额曲线
FORWARD CURRENT DERATING CURVE

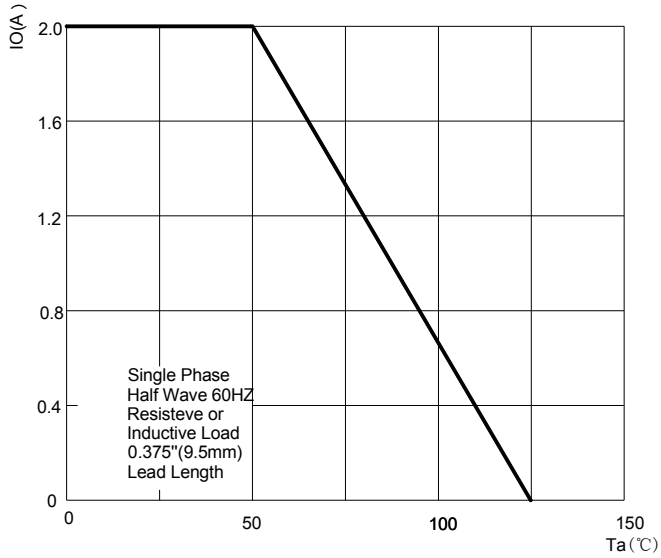


FIG.2 最大正向浪涌冲击耐受力
MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

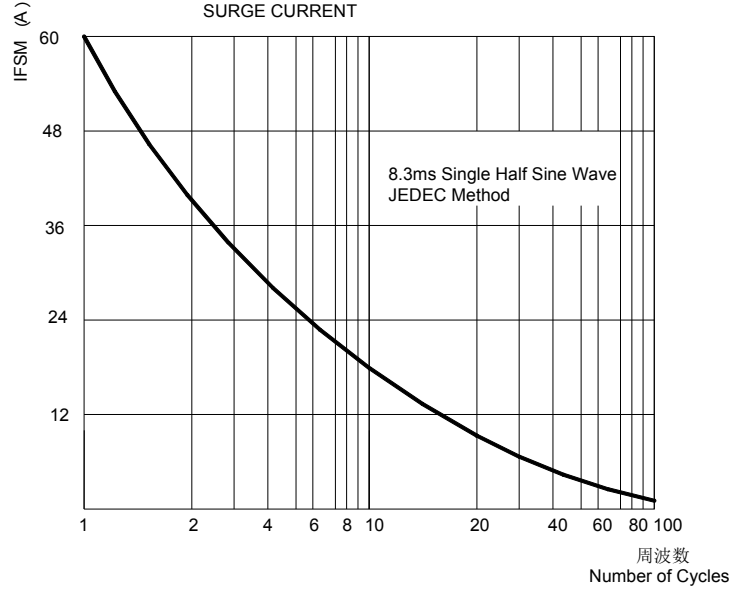


FIG.3 典型正向特性曲线
TYPICAL FORWARD CHARACTERISTICS

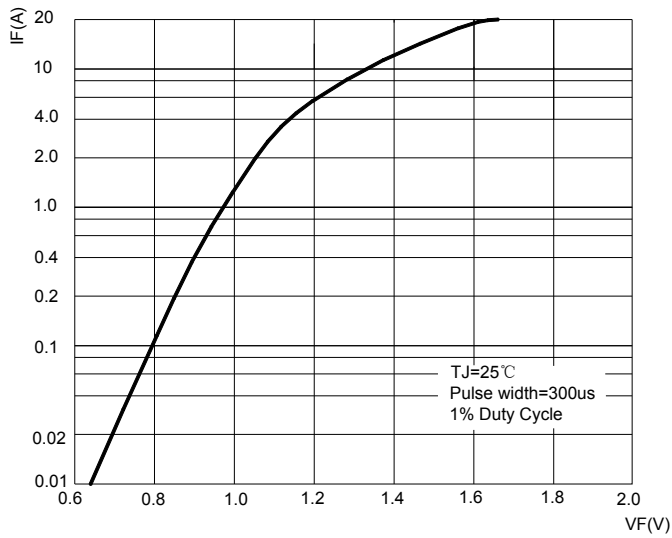


FIG.4 典型反向特性曲线
TYPICAL REVERSE CHARACTERISTICS


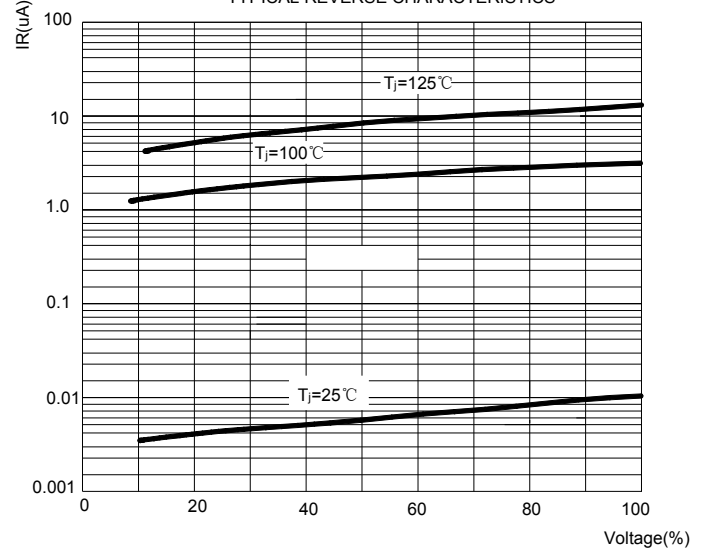


FIG.5 反向恢复时间试验电路及测试波形示意图
Diagram of circuit and Testing wave form of reverse recovery time

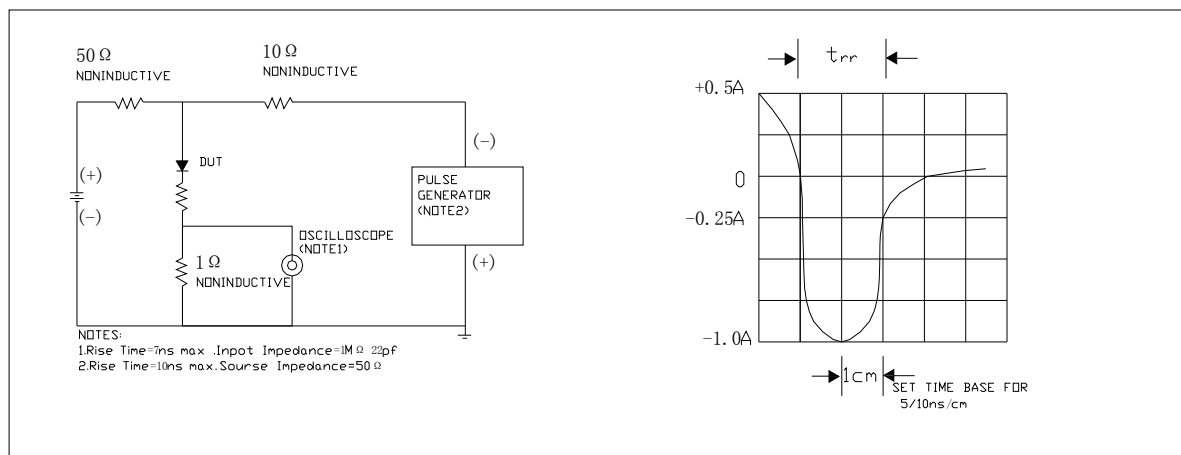

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching](#) ***category:***

Click to view products by [Yangjie](#) ***manufacturer:***

Other Similar products are found below :

[053684A](#) [057245E](#) [10A06-TP](#) [10A10](#) [10A10](#) [10A10](#) [10A10G](#) [10A2](#) [10A4](#) [150K20A](#) [150K60A](#) [150K80A](#) [150KR80A](#) [1A1](#) [1A2](#) [1A3](#) [1A4](#)
[1A4](#) [1A5](#) [1A6](#) [1A7](#) [1A7](#) [1A7](#) [1A7](#) [1A7A](#) [1G7](#) [1N3064TR](#) [1N3070](#) [1N3070TR](#) [1N3295A](#) [1N3295AR](#) [1N3296A](#) [1N3493R-SGS](#) [1N3595](#)
[1N3595TR](#) [1N3595US](#) [1N3600](#) [1N3600 TR](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001A](#) [1N4001G](#) [1N4001G](#)
[1N4001-T](#) [1N4001W](#)