




119mm Compact Fan

- With electronic protection against reverse polarity. The fan only operates when the polarity is correct. Impedance-protected against locked rotor and overloading.
- Fan of fibreglass reinforced plastic. PBT housing, PA impeller.
- Air exhaust over struts. Rotational direction CCW looking at rotor.
- Fitted with 3 pin molex connector (22-01-2035)
- Sensor signal for speed monitoring

Part Number	Air flow @ free air	Air flow @ free air	Nominal voltage	Nominal range	Noise	Sinter-sleeve bearings	Power input	Nominal speed	Max. Ambient Temperature	Service life L ₁₀ @40°C / @ t max	Dimension
	m ³ /h	CFM	VDC	VDC	dB(A)		Watt	min ⁻¹	°C	Hours	A
4412F/2GL-489	91	54	12	7...15	26	Yes	1.2	1600	-20...+75	80,000/35,500	323
4412F/2M-504	137	81	12	6...13	38	Yes	3.0	2400	-20...+75	70,000/30,000	413
4412F/2GLL-515	68	40	12	7...15	26	Yes	0.7	1200	-20...+75	84,000/37,500	323

Subject to alterations

Dimensions

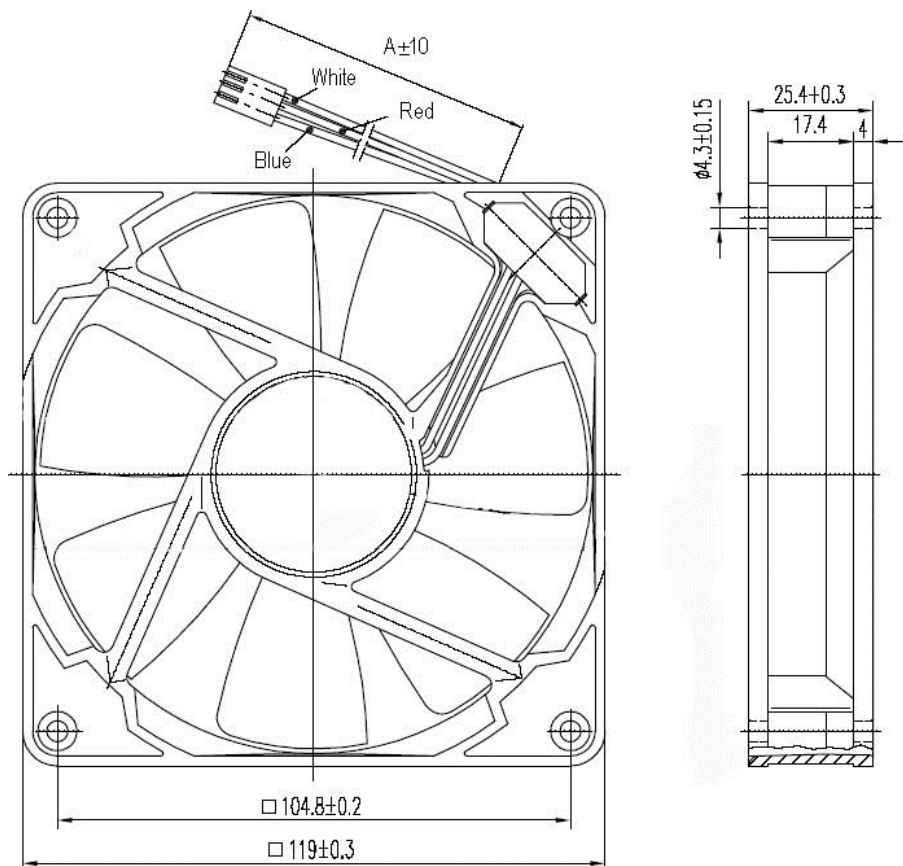

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ebm](#) [papst](#) manufacturer:

Other Similar products are found below :

[W2G110-AG43-01](#) [4412F/2GLL-515](#) [3252JH](#) [W2G110-AK43-31](#) [6224NT](#) [M2E068-BF83-12](#) [M4Q045-CA25-04](#) [D2E133-DM27-D8](#) [8314S](#)
[8414NHU](#) [A4E350-AQ02-09](#) [R4E400-AP15-10](#) [S2E250-AL06-12](#) [S4E300-AS72-50](#) [S4E450-AU03-02](#) [9496-2-4039-1](#) [A2D250-AA02-18](#)
[A2D300-AD02-01](#) [A2E300-AP02-01](#) [QR06A-2/106349](#) [R2E180CH0312](#) [R3G175-AF25-02](#) [RG125-19/12N/2](#) [RH31M-6/104372](#) [RH56M-](#)
[6/204689](#) [3950L](#) [4114NXH](#) [4412F](#) [4800N](#) [3212J/2N-301](#) [3214J39NR](#) [3314U](#) [D4E180-BA02-02](#) [W2D200-HH04-07](#) [W2S130-AA25-64](#)
[4314/17T](#) [4314R](#) [DV6424/12](#) [EE1G-115-140-03](#) [EE1G-230-160-02](#) [66313-2-4039](#) [4414FD](#) [4312R](#) [QLZ06/1800-2518](#) [QLK45/2400-2524L](#)
[R2D250-AF10-12](#) [R2E220-RA38-13](#) [R3G280-AF45-81](#) [R2S133-AE17-43](#) [414F2](#)