


CHAIN TERMINAL Made in Belgium

STO series (Tab-on Straight) <Made in Belgium>

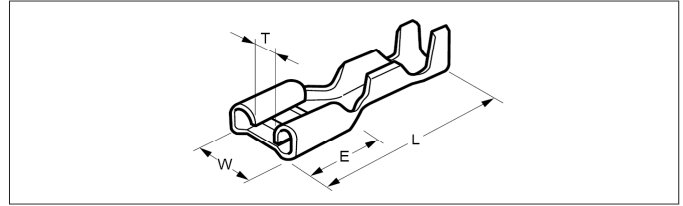

UL Listed file No. E70188 DIN 46247 TÜV 50147861

Model No.	Standard	Applicable wire			Material	Finish	Dimensions (mm)						Q'ty / reel
		mm2	AWG #	Insulation O.D. (mm)			W	L	E	T	Material thickness	Mating tab thickness	
STO-1.0-250N	UL	0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	-	7.6	19.2	7.6	1.6	0.45	0.8	5,000
STO-1.0T-250N						Tin-plated							
STO-1.0-S250N	UL	0.5 to 1.0	20 to 18	2.5 to 2.9	Brass	-	7.7	19.2	7.6	2.4	0.40	0.8	5,000
STO-1.0T-S250N						Tin-plated							
STO-1.0-250NL*	UL	0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	-	7.6	19.2	7.6	1.6	0.45	0.8	5,000
STO-1.0T-250NL*						Tin-plated							
STO-2.5-250N	UL	1.0 to 2.5	18 to 14	2.7 to 4.3	Brass	-	7.6	19.2	7.6	1.6	0.45	0.8	5,000
STO-2.5T-250N						Tin-plated							
STO-2.5-S250N	UL	1.0 to 2.5	18 to 14	2.9 to 3.6	Brass	-	7.7	19.2	7.6	2.4	0.40	0.8	5,000
STO-2.5T-S250N						Tin-plated							
STO-2.5-250NL*	UL	1.0 to 2.5	18 to 14	2.7 to 4.3	Brass	-	7.6	19.2	7.6	1.6	0.45	0.8	5,000
STO-2.5T-250NL*						Tin-plated							
STO-6.0-250N	UL	2.5 to 6.0	14 to 10	3.9 to 5.1	Brass	-	7.6	19.2	7.6	1.6	0.45	0.8	4,000
STO-6.0T-250N						Tin-plated							
STO-1.0-187N-5	UL	0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	-	5.8	15.6	6.4	1.0	0.35	0.5	8,000
STO-1.0T-187N-5						Tin-plated						0.8	
STO-1.0-187N-8						-						0.8	
STO-1.0T-187N-8						Tin-plated						0.8	
STO-0.25-110N-5	UL	0.1 to 0.25	26 to 24	1.3 to 1.5	Brass	-	3.7	14.5	6.2	0.3	0.25	0.5	15,000
STO-0.25T-110N-5						Tin-plated						0.8	
STO-0.25-110N-8						-						0.5	
STO-0.25T-110N-8						Tin-plated						0.8	
STO-0.5-110N-5	UL	0.25 to 0.5	24 to 20	1.5 to 2.0	Brass	-	3.7	14.5	6.2	0.3	0.25	0.5	15,000
STO-0.5T-110N-5						Tin-plated						0.8	
STO-0.5-110N-8						-						0.5	
STO-0.5T-110N-8						Tin-plated						0.8	
STO-1.0-110N-5	UL	0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	-	3.7	14.5	6.2	0.3	0.25	0.5	15,000
STO-1.0T-110N-5						Tin-plated						0.8	
STO-1.0-110N-8						-						0.5	
STO-1.0T-110N-8						Tin-plated						0.8	
STO-1.0-110B-5	UL	0.5 to 1.0	20 to 18	2.0 to 3.3	Brass	-	3.7	14.5	6.2	0.3	0.25	0.5	15,000
STO-1.0T-110B-5						Tin-plated						0.8	
STO-1.0-110B-8						-						0.5	
STO-1.0T-110B-8						Tin-plated						0.8	

RoHS compliance

Note: 1. Terminals of phosphor bronze or nickel-silver are also available. Contact J.S.T. Belgium N.V. for details
2. *L=Low insertion force type.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [jst](#) manufacturer:

Other Similar products are found below :

[B08B-JWPF-SK-R](#) [B3PS-VH](#) [B5B-XH-A](#) [B5P-VH](#) [B7B-XH-A](#) [B8B-PH-SM4-TB](#) [S03B-XASK-1\(LF\)\(SN\)](#) [GS6-16](#) [B34B-PHDSS-B\(LF\)\(SN\)](#) [B3B-ZR-SM4-TF](#) [B4B-PH-K-S-GW](#) [B4B-PH-SM4-TB](#) [B4PS-VH](#) [B5B-PH-SM4-TB](#) [B6B-PH-SM4-TB](#) [B6B-XH-A](#) [B6PS-VH](#) [B7PS-VH](#) [B8B-PH-K-S](#) [IDH-KR-12](#) [10HR-4K](#) [WC-ZE2426](#) [WC-691](#) [WC-122](#) [B04B-PASK-1](#) [FVDDF5.5-375A \(LF\)](#) [FVWS2-S3.3 \(LF\)](#) [FVWS5.5-5 \(LF\)](#) [B6PS-VH\(LF\)\(SN\)](#) [FNGS12-6](#) [TWE0.5-8](#) [FVGS4-1 \(LF\)](#) [HILR-06VF-1-S](#) [YRS-1090](#) [WC-GVH2630](#) [WC-PUD2](#) [S10B-PH-SM4-TB\(LF\)\(SN\)](#) [B4B-EH-A-TW \(LF\)\(SN\)](#) [B4B-XH-TW \(LF\)\(SN\)](#) [B5B-PH-TW-S \(LF\)\(SN\)](#) [B8B-PH-TW-S \(LF\)\(SN\)](#) [B9B-XH-A](#) [BM03B-GHS-TBT](#) [BM04B-GHS-TBT](#) [BM06B-GHS-TBT](#) [BM10B-GHS-TBT](#) [10FPZ-SM-TF\(LF\)\(SN\)](#) [YRS-852](#) [B04B-VYHSK-M-1](#) [WC-530](#)