

Ordering Information


25 43 U-2 XX X W XX S N X 01

43=Ht.3mm
Plastic high
No.of Pins
Per Row
01~40P
Insulator
Material
Option
W=with
Post
N=w/o post
Contact Plating
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
S0:Gold
Flash/Tin
SK:tin




F=LCP
E=PA6T
D=PA66
C=PA6T
B=PA66
A=PBT
Option
N=w/o post
W=with
Post
Contact Plating
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
S0:Gold
Flash/Tin
SK:tin

Packing
0=PE Bag
1=Tube
A=Tray
R=Tube+Cap
M=Reel+Mylar

code stream
01~99

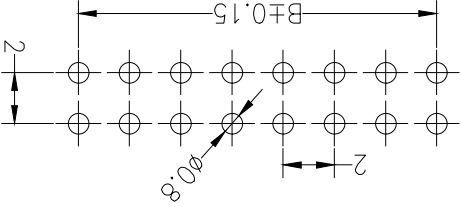

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

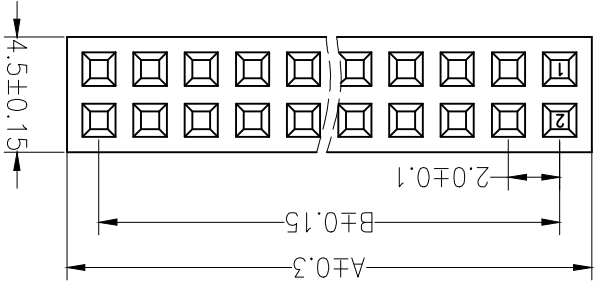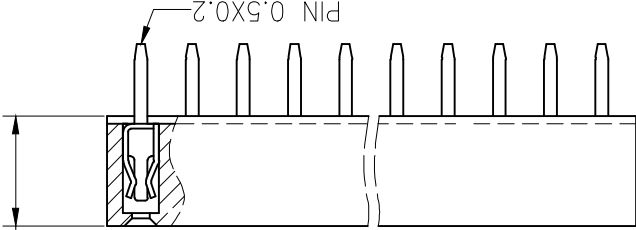

SCALE:1:1 SIZE: A4
UNIT: mm [inch]
X" ±2' X.X' ±0.5'
X.XX ±0.15
X.X ±0.30
X.XX ±0.25
TOLERANCE:

APPROVED BY: 马跃
CHECKED BY: 陈一鸣
DRAWN BY: 陈一鸣

DATE: 2014-02-23
DATE: 2014-02-23
DATE: 2014-02-23

SHEET NO. 1 OF 1
DRAW NO: HYC-1812011046
MOLD NO.
PART NO. 2543U-2XXXXXXSNX01

PART NAME: 2.00X4.3FH 2XNPIN 180°

深圳市华宇创精密电子有限公司

Dimen Sions List

Contacts	Dimensions	Per row
2	4.50	2.00
3	6.50	4.00
4	8.50	6.00
5	10.50	8.00
6	12.50	10.00
7	14.50	12.00
8	16.50	14.00
9	18.50	16.00
10	20.50	18.00
11	22.50	20.00
12	24.50	22.00
13	26.50	24.00
14	28.50	26.00
15	30.50	28.00
16	32.50	30.00
17	34.50	32.00
18	36.50	34.00
19	38.50	36.00
20	40.50	38.00

Dimen Sions List

Standard: PA6T

Insulator Material:Polyester(UL94V-0)

Contact Plating:Au or Sn Over Ni

Contact Material:Brass

Operation Temperature:-40°C to +105°C

Insulation Resistance:1000MΩ Min

Withstand Voltage:500V AC/DC

Contact Resistance:20mΩ Max

Rated Current:1.5AMP

SPECIFICATIONS

Max.Processing Temp: 230°C for 30-60 seconds

(260°C for 10 seconds)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [HOAUC](#) ***manufacturer:***

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)