
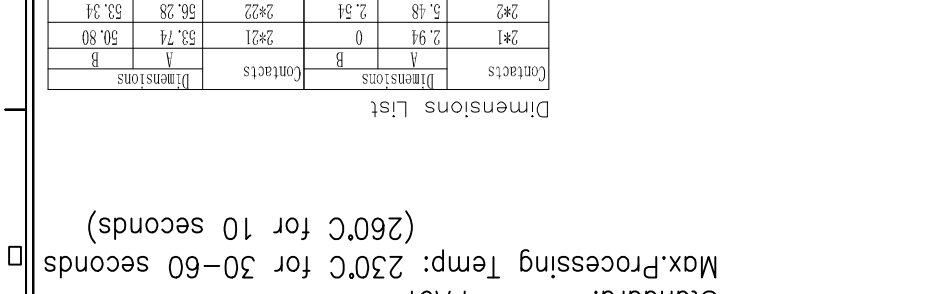


[illegible]

Technical drawing of a 10x10 hole grid. The grid is defined by a 10x10 array of circles. Dimensions are indicated: a horizontal dimension of $B \pm 0.1$ and a vertical dimension of 2.54. A specific hole is identified with a dimension of 01.02. Below the grid is a table listing the coordinates (X, Y) for each hole in the grid.

2*10	25.80	22.86	2*30	76.60	73.66
2*11	28.34	25.40	2*31	79.14	76.20
2*12	30.88	27.94	2*32	81.68	78.74
2*13	33.42	30.48	2*33	84.22	81.28
2*14	35.96	33.02	2*34	86.76	83.82
2*15	38.50	35.56	2*35	89.30	86.36
2*16	41.04	38.10	2*36	91.84	88.90
2*17	43.58	40.64	2*37	94.38	91.44

2*3	2*4	2*5	2*6	2*7	2*8	2*9
8.02	10.56	13.10	15.64	18.18	20.72	23.26
5.08	7.62	10.16	12.70	15.24	17.78	20.32
2*23	2*24	2*25	2*26	2*27	2*28	2*29
58.82	61.36	63.90	66.44	68.98	71.52	74.06
55.88	58.42	60.96	63.50	66.04	68.58	71.12

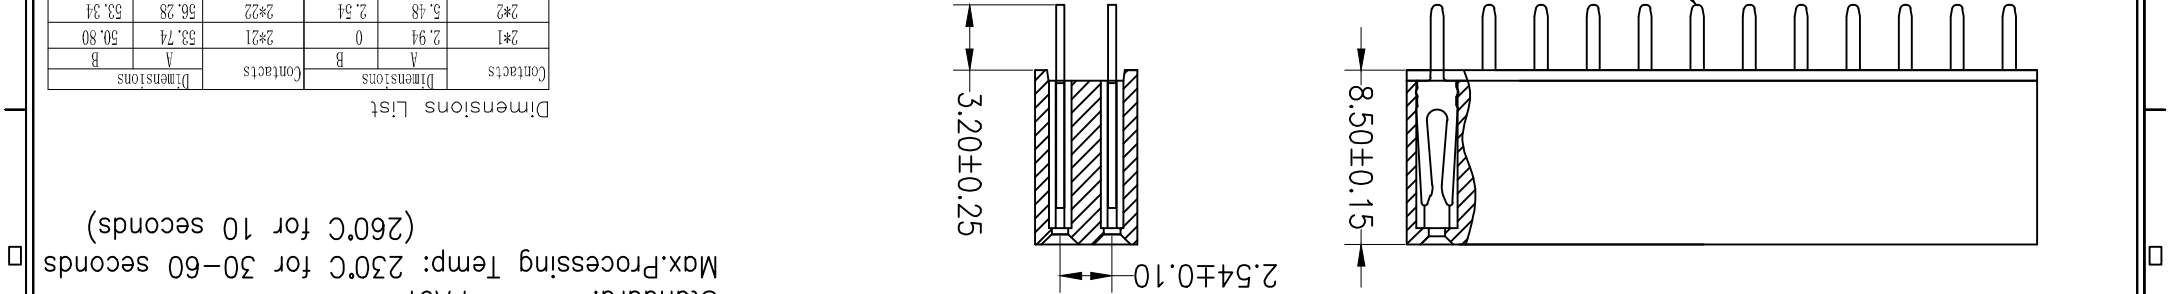

Top View Dimensions:

- Overall Width: $A \pm 0.3$
- Overall Length: $B \pm 0.1$
- Pin Pitch: 2.54 ± 0.1

Pin Layout:

- Pin 1: Top Left
- Pin 2: Top Right

Rated Current:3.0AMP	
Contact Resistance:20mΩ Max	
Withstand Voltage:1000V AC/DC	
Insulation Resistance:1000MΩ Min	
Operation Temperature:-40°c to +105°c	
Contact Material:Brass	
Contact Plating:Au or Sn Over Ni	
Insulator Material:Polyester(UL94V-0)	
Standard: PA6T	
Max.Processing Temp: 230°C for 30-60 seconds	□
(260°C for 10 seconds)	

Dimensions List

Contacts	2*1	2.94	0	2*21	53.74	50.80
	Dimensions	A	B		A	B
Contacts	2*2	5.48	2.54	2*22	56.28	53.34
	2*3	8.02	5.08	2*23	58.82	55.88
Contacts	2*4	10.56	7.62	2*24	61.36	58.42
	2*5	13.10	10.16	2*25	63.90	60.96
Contacts	2*6	15.64	12.70	2*26	66.44	63.50
	2*7	18.18	15.24	2*27	68.98	66.04
Contacts	2*8	20.72	17.78	2*28	71.52	68.58
	2*9	23.26	20.32	2*29	74.06	71.12
Contacts	2*10	25.80	22.86	2*30	76.60	73.66
	2*11	28.34	25.40	2*31	79.14	76.20
Contacts	2*12	30.88	27.94	2*32	81.68	78.74
	2*13	33.42	30.48	2*33	84.22	81.28
Contacts	2*14	35.96	33.02	2*34	86.76	83.82
	2*15	38.50	35.56	2*35	89.30	86.36
Contacts	2*16	41.04	38.10	2*36	91.84	88.90
	2*17	43.58	40.64	2*37	94.38	91.44
Contacts	2*18	46.12	43.18	2*38	96.92	93.98
	2*19	48.66	45.72	2*39	99.46	96.52
Contacts	2*20	51.20	48.26	2*40	102.00	99.06

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [HOAUC](#) ***manufacturer:***

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)