






REV.	A		DESCRIPTION	DATE	DESIGN
ECON NO.					
			变更料号	16/11/22	苏亮

NOTES:


CURRENT RATING:3A AC/DC.
VOLTAGE RATING:250V AC/DC
TEMPERATURE RANGE:-40°C~+105°C.
CONTACT RESISTANCE:10MΩ Max.
INSULATION RESISTANCE:1000MΩ Min.
WITHSTANDING VOLTAGE: 800V AC/MINUTE.
WATERLAL:PA66,UL94V-0.

Dimensions	A	B
------------	---	---

PART NO.	Dimensions	
	A	B
A2006H-2X02P	2.00	6.00
A2006H-2X03P	4.00	8.00
A2006H-2X04P	6.00	10.00
A2006H-2X05P	8.00	12.00
A2006H-2X06P	10.00	14.00
A2006H-2X07P	12.00	16.00
A2006H-2X08P	14.00	18.00
A2006H-2X09P	16.00	20.00
A2006H-2X10P	18.00	22.00
A2006H-2X11P	20.00	24.00
A2006H-2X12P	22.00	26.00
A2006H-2X13P	24.00	28.00
A2006H-2X14P	26.00	30.00
A2006H-2X15P	28.00	32.00
A2006H-2X16P	30.00	34.00
A2006H-2X17P	32.00	36.00
A2006H-2X18P	34.00	38.00
A2006H-2X19P	36.00	40.00
A2006H-2X20P	38.00	42.00

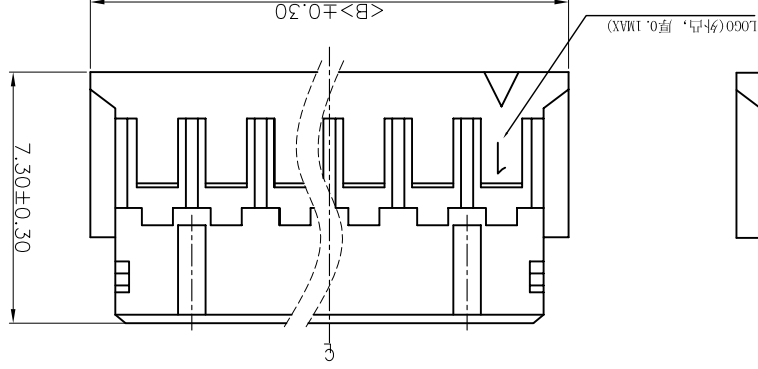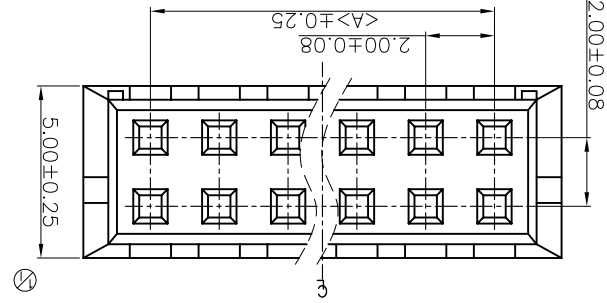

LOGO (0907), 0.1 MAX

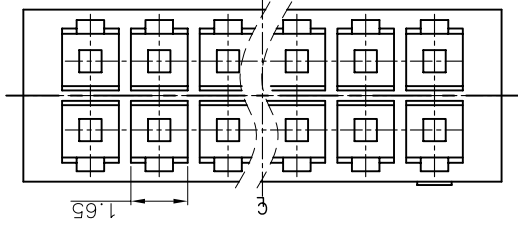






Part NO.	Wire range	Insulation O.D.	Materials	Finish	Qty/reel
A2006-TP	AWG#22-28	1.5mm(max)	Phosphor Bronze	Tin-plated	10000PCS
A2006-TPE	AWG#22-28	1.5mm(max)	Phosphor Bronze	Tin-plated	10000PCS

DIM	TOL	DIM	TOL
X.X	/	X.X	/
X.XX	0.15	X.XX°	/
X.XXX	0.10	X.XXX°	/

DRAW NO.	DESIGN:	CHECK:	REVIEW:
	陈雪峰	杨 烨	
DATE	2017.06.03		

REV. A/1	SCALE 1:1	UNIT: mm	SHEET: 1 OF 1
P/N NO:		A2006-XXX	
DRAW NAME:		2.0mm pitch Terminal	

CNJM Joint More Precision electronics Co.,Ltd.

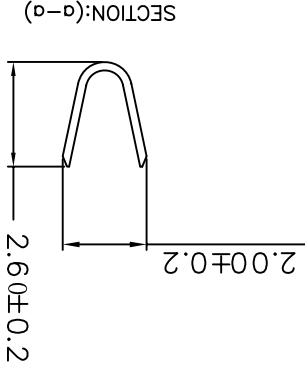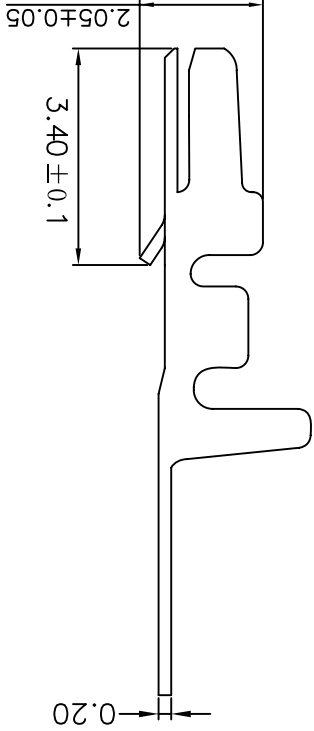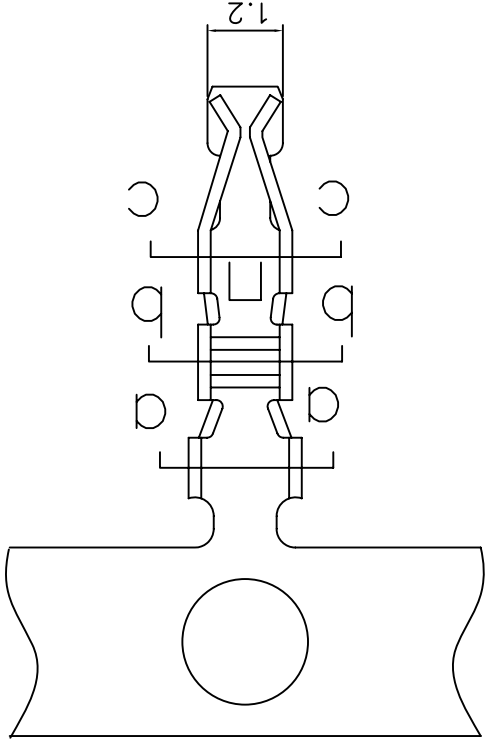

REV.	ECN NO.	变更料号	16/11/22	苏亮
A		DESCRIPTION	DATE	DESIGN

Technical drawing of the P.C.B. LAYOUT showing dimensions and tolerances. The drawing includes a title block at the top right with the text "P.C.B. LAYOUT". The layout consists of six rectangular components arranged in two rows of three. The dimensions are as follows:

- Overall width: 5.30 ± 0.10
- Overall height: 2.00 ± 0.10
- Distance between the centerlines of the two rows: 2.00
- Distance between the centerlines of the three components in each row: 1.1
- Distance from the left edge to the centerline of the first component in each row: $B \pm 0.10$

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:−40°C~+105°C.
Contact resistance:10MΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:pagt 94V0.

CNJM Joint More Precision electronics Co.,Ltd.

REV.	A	
ECN NO.		
DESCRIPTION	变更料号	
DATE	16/11/22	苏亮

Specifications:

Current rating:3A AC/DC.

Voltage rating:250V AC/DC




Temperature range:-40℃~+105℃.

Contact resistance:10MΩ Max.

Insulation resistance:100MΩ Min.

Withstanding voltage: 800V AC/minute.

Material:paft 94V0.

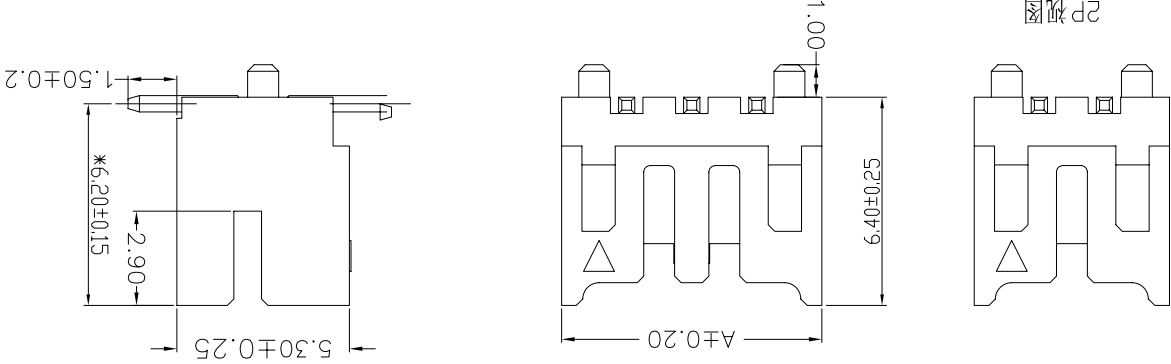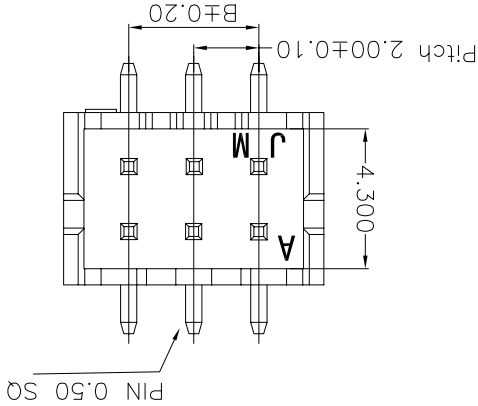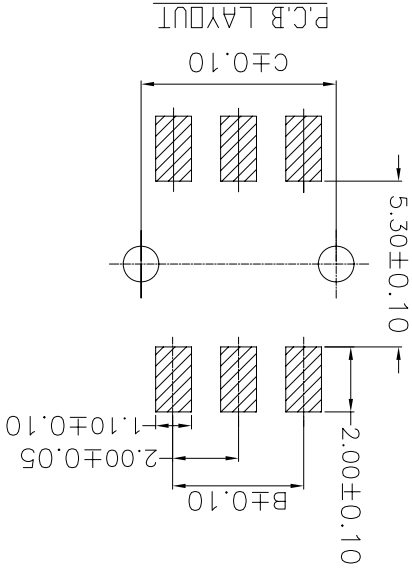

PART NO.			Dimensions		
A	B	C	A	B	C
A2006WV-S-F-2X02P	6.00	2.00	8.00	4.00	6.00
A2006WV-S-F-2X03P	8.00	4.00	10.00	6.00	8.00
A2006WV-S-F-2X04P	10.00	6.00	12.00	8.00	10.00
A2006WV-S-F-2X05P	12.00	8.00	14.00	10.00	12.00
A2006WV-S-F-2X06P	14.00	10.00	16.00	12.00	14.00
A2006WV-S-F-2X07P	16.00	12.00	18.00	14.00	16.00
A2006WV-S-F-2X08P	18.00	14.00	20.00	16.00	18.00
A2006WV-S-F-2X09P	20.00	16.00	22.00	18.00	20.00
A2006WV-S-F-2X10P	22.00	18.00	24.00	20.00	22.00
A2006WV-S-F-2X11P	24.00	20.00	26.00	22.00	24.00
A2006WV-S-F-2X12P	26.00	22.00	28.00	24.00	26.00
A2006WV-S-F-2X13P	28.00	24.00	30.00	26.00	28.00
A2006WV-S-F-2X14P	30.00	26.00	32.00	28.00	30.00
A2006WV-S-F-2X15P	32.00	28.00	34.00	30.00	32.00
A2006WV-S-F-2X16P	34.00	30.00	36.00	32.00	34.00
A2006WV-S-F-2X17P	36.00	32.00	38.00	34.00	36.00
A2006WV-S-F-2X18P	38.00	34.00	40.00	36.00	38.00
A2006WV-S-F-2X19P	40.00	36.00	42.00	38.00	40.00
A2006WV-S-F-2X20P	42.00	38.00	44.00	40.00	42.00

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME:
DESIGN:	2017.06.03	A2006WV-S-F-2XNP	2.0mm PITCH 180° DUAL ROW WAFER
CHECK:	杨 烨		-SMT TYPE
REVIEW:		SCALE 1:1	UNIT: mm
			SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X.	/
X.X	0.25	X.X	0.25
X.XX	0.15	X.XX	0.15
X.XXX	0.10	X.XXX	0.10

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [CNJM](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)