




Part NO.	Wire range	Insulation O.D.	Materials	Finish	Qty/reel
A2001-TP	AWG#24-32	1.8mm(max)	Phosphor Bronze	Tin-plated	10000PCS
A2001-TPE	AWG#24-32	1.8mm(max)	Phosphor Bronze	Tin-plated	10000PCS

X	DIM	X	DIM
X.X	TOL	X.X	TOL
0.15	X.XX°	0.25	X.X°
0.10	X.XXX°	/	X°
/	/	/	TOL

REV. A/1	SCALE 1:1	UNIT: mm	SHEET 1 OF 1
REV. A/1	SCALE 1:1	UNIT: mm	SHEET 1 OF 1
REV. A/1	SCALE 1:1	UNIT: mm	SHEET 1 OF 1

REV. A/1	SCALE 1:1	UNIT: mm	SHEET 1 OF 1
REV. A/1	SCALE 1:1	UNIT: mm	SHEET 1 OF 1
REV. A/1	SCALE 1:1	UNIT: mm	SHEET 1 OF 1

CNJM Joint More Precision electronics Co.,Ltd.

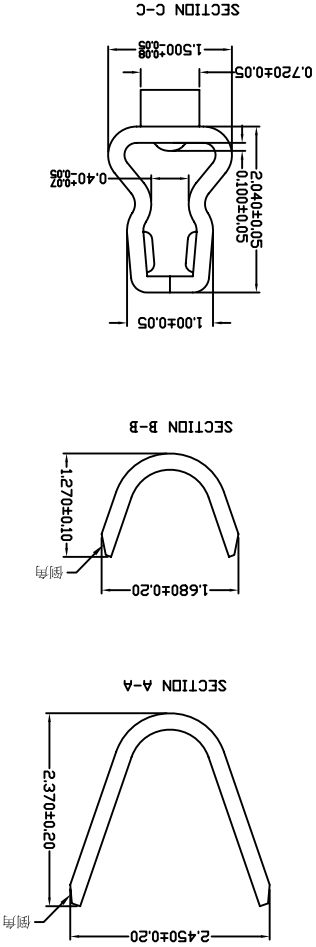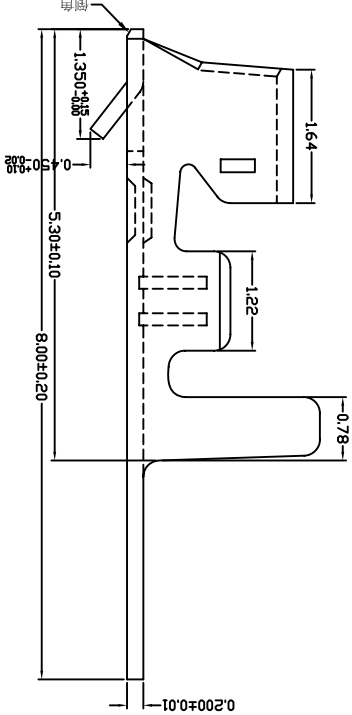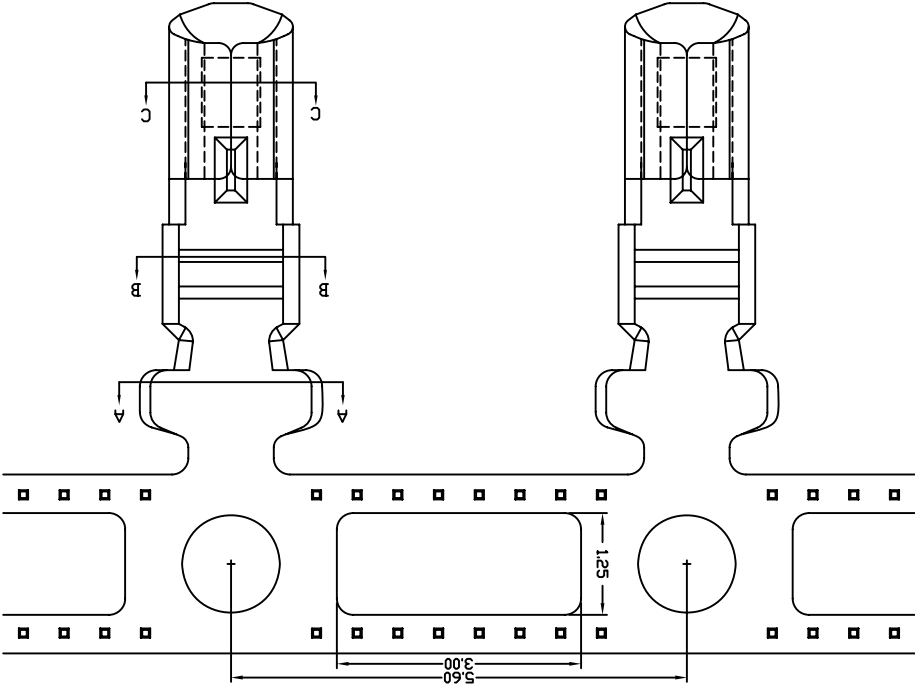

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A				

REV.	ECN NO.	DESCRIPTION
A		

SPECIFICATIONS

- 1) MATERIAL: HOUSING:PA9T,UL94V-0, TERMINAL:BRASS,TIN PLATING
- 2) CURRENT RATING:2A AC/DC,
- 3) VOLTAGE RATING:100V AC/DC
- 4) CONTACT RESISTANCE:20M OHMS MAX
- 5) INSULATION RESISTANCE:1,000M OHMS MIN.
- 6) TEMPERATURE RANGE:-40°~+105°.






Ordering Information&Dimensions:

PART NO.		Dimensions	
A2001WR-S-02P	2.00	A	B
A2001WR-S-03P	4.00		
A2001WR-S-04P	6.00		
A2001WR-S-05P	8.00		
A2001WR-S-06P	10.00		
A2001WR-S-07P	12.00		
A2001WR-S-08P	14.00		
A2001WR-S-09P	16.00		
A2001WR-S-10P	18.00		
A2001WR-S-11P	20.00		
A2001WR-S-12P	22.00		
A2001WR-S-13P	24.00		
A2001WR-S-14P	26.00		
A2001WR-S-15P	28.00		
A2001WR-S-16P	30.00		
		36.00	

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME:
CHECK:	陈雪峰	A2001WR-S-NP-HF	2.0mm pitch 90° SMT wifer
REV.:	杨 烨		
REV.A/1		SCALE 1:1	UNIT: mm
		SHEET 1 OF 1	

DIM	TOL	DIM	TOL
X	/	X	/
X.X	0.25	X.X	/
X.XX	0.15	X.XX	/
X.XXX	0.10	X.XXX	/

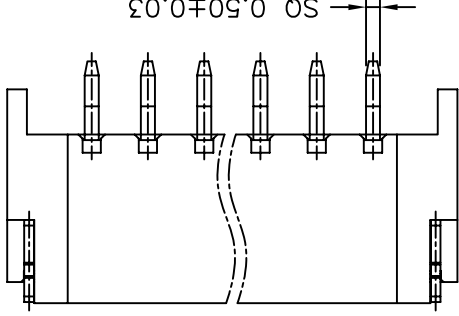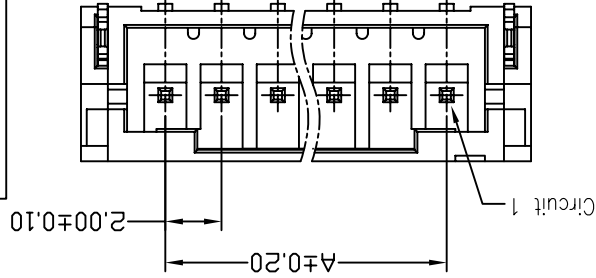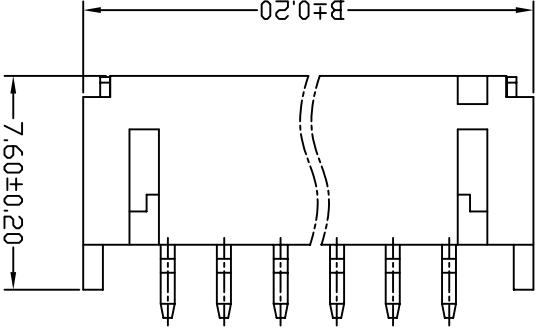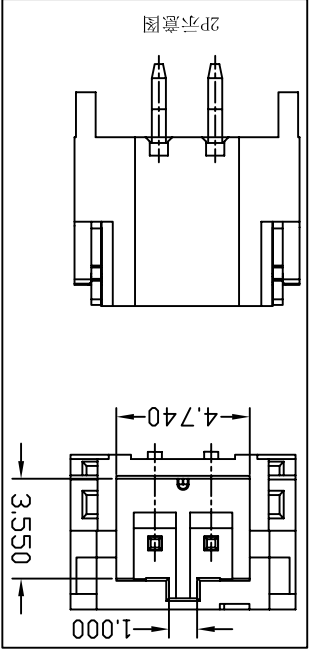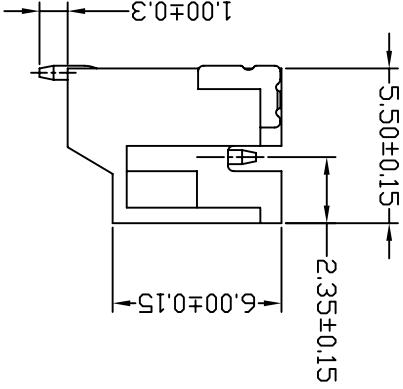

REV.	ECN NO.	DESCRIPTION
A		
		DATE
		DESIGN

SPECIFICATIONS








- 1) MATERIAL:
HOUSING:PA9T,UL94V-0,
TERMINAL:BRASS,TIN PLATING
- 2) CURRENT RATING:2A AC,DC,
3) VOLTAGE RATING:100V AC/DC
4) CONTACT RESISTANCE:20M OHMS MAX
5) INSULATION RESISTANCE:1,000M OHMS MIN.
6) TEMPERATURE RANGE:-40~+105°.

Ordering Information&Dimensions:

PART NO.		A2001WV-S-02P		A2001WV-S-03P		A2001WV-S-04P		A2001WV-S-05P		A2001WV-S-06P		A2001WV-S-07P		A2001WV-S-08P		A2001WV-S-09P		A2001WV-S-10P		A2001WV-S-11P		A2001WV-S-12P		A2001WV-S-13P		A2001WV-S-14P		A2001WV-S-15P		A2001WV-S-16P	
Dimensions		2.00		4.00		6.00		8.00		10.00		12.00		14.00		16.00		18.00		20.00		22.00		24.00		26.00		28.00		30.00	
A		2.00		4.00		6.00		8.00		10.00		12.00		14.00		16.00		18.00		20.00		22.00		24.00		26.00		28.00		30.00	
B		8.00		10.00		12.00		14.00		16.00		18.00		20.00		22.00		24.00		26.00		28.00		30.00		32.00		34.00		36.00	

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME:
DESIGN:	2017.06.03	A2001WV-S-NP-HF	2.0mm pitch 180° SMT w afer
CHECK:			
REVIEW:			
REV.	A/1	SCALE 1:1	UNIT: mm
			SHEET 1 OF 1

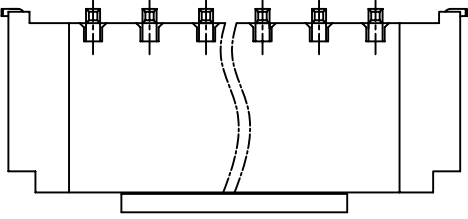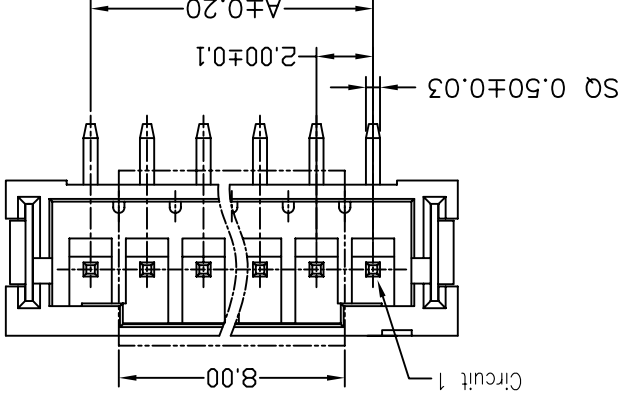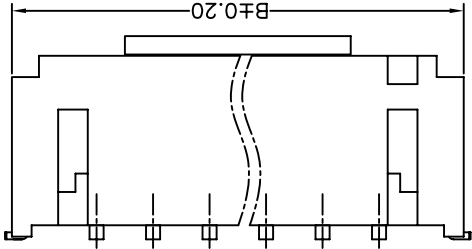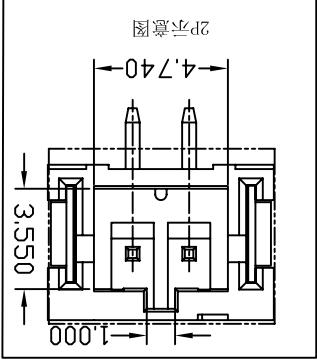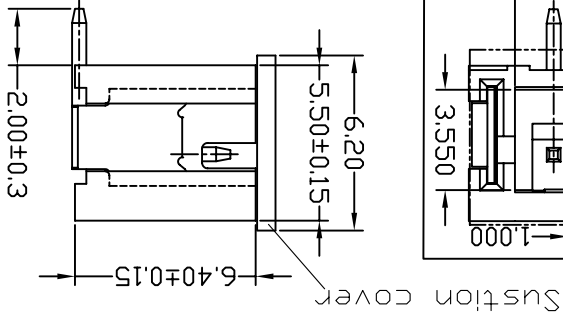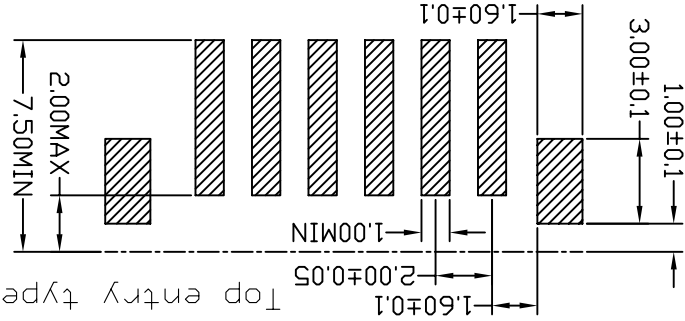

Dimensions		载带尺寸		盘箱 Reel/Box
B	W	24	32	
16P	56	44	7	6
15P				
14P				
13P				
12P		10	10	
11P				
10P				
9P				
8P		14	14	
7P				
6P				
5P				
4P		24	24	
3P				
2P				
1P				

DIM	TOL	X.XX	X.XXX
DIM	TOL	X.X°	X.XXX°
DIM	TOL	X.	X.XXX
DIM	TOL	/	/


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A				

DRAW NO.	DESIGN	CHECK	REV.	SCALE	UNIT	SHEET
	陈雪峰	杨 烨	A/1	1:1	mm	1 OF 1


DATE	P/N NO.	DRAW NAME
2017.06.03		PH2.0 SMT 90° 包装规格

CNJM Joint More Precision electronics Co.,Ltd.




步骤二、在卷盘表层增加一层保护带，并在卷盘四周贴上美纹带，再套上1PCS高密度PE袋，包装好后，需在包装卷盘上贴上产品标签，注明产品名称及数量等。

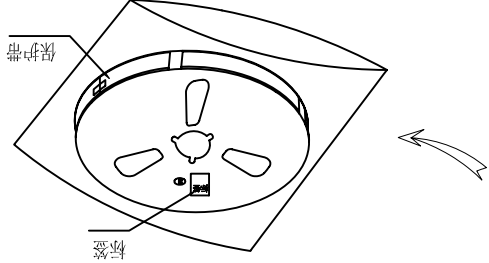


步骤一、将产品平稳放于载带内1000PCS/卷，前后各空20PCS空格，上带最后需预留500mm Min.并于卷盘贴标签处贴上相应标签。

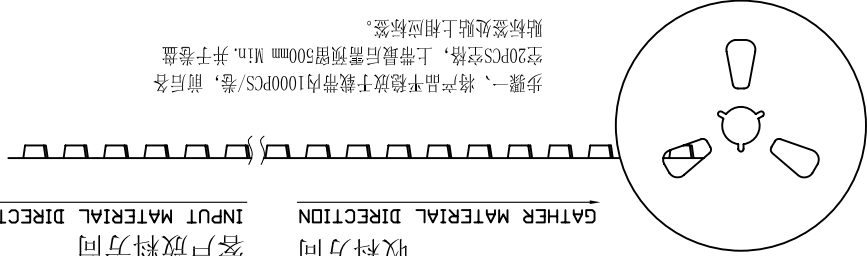

收料方向
客户放料方向
GATHER MATERIAL DIRECTION
INPUT MATERIAL DIRECTION

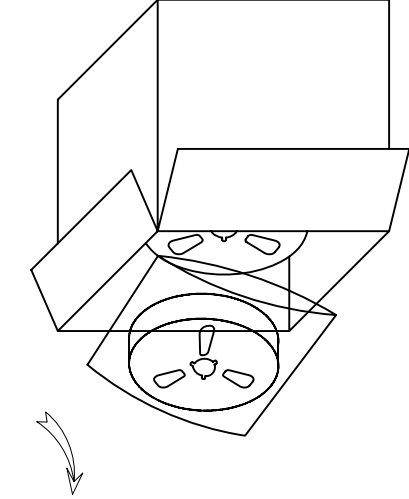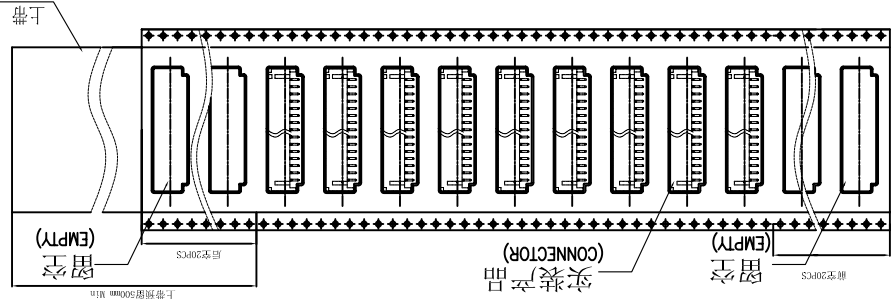

步骤三、将那装好的卷盘放入纸箱，然后用胶带将纸箱封闭，并在纸箱上指定的位置贴上相应标签，注明产品名称及数量、生产日期等。



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [CNJM](#) ***manufacturer:***

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)