

## PNP Silicon Epitaxial Planar Transistor


**B772**

### FEATURES

- Low speed switching.
- Low saturation voltage.
- Excellent  $h_{FE}$  linearity and high  $h_{FE}$ .
- Complementary: D882.



**HF**

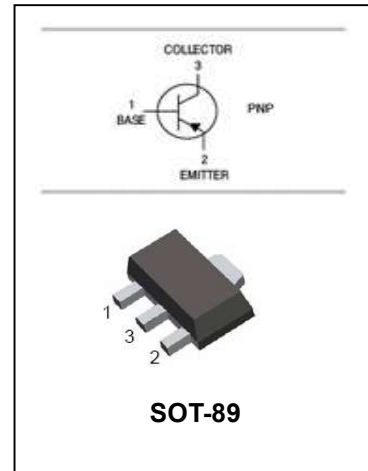

### APPLICATIONS

- Audio frequency power amplifier.

### ORDERING INFORMATION

| Type No. | Marking | Package Code |
|----------|---------|--------------|
| B772□    | B772    | SOT-89       |

□: none is for Lead Free package;  
“G” is for Halogen Free package.

### MAXIMUM RATING @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

| Symbol          | Parameter                                  | Value       | Units                       |
|-----------------|--------------------------------------------|-------------|-----------------------------|
| $V_{CBO}$       | Collector-Base Voltage                     | -40         | V                           |
| $V_{CEO}$       | Collector-Emitter Voltage                  | -30         | V                           |
| $V_{EBO}$       | Emitter-Base Voltage                       | -5          | V                           |
| $I_C$           | Collector Current -Continuous              | -3          | A                           |
| $P_C$           | Collector Dissipation                      | 500         | mW                          |
| $R_{\theta JA}$ | Thermal Resistance Junction to Ambient Air | 250         | $^{\circ}\text{C}/\text{W}$ |
| $T_j, T_{stg}$  | Junction and Storage Temperature           | -55 to +150 | $^{\circ}\text{C}$          |

## PNP Silicon Epitaxial Planar Transistor

**B772**

### ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

| Parameter                            | Symbol        | Test conditions                    | MIN | TYP  | MAX  | UNIT    |
|--------------------------------------|---------------|------------------------------------|-----|------|------|---------|
| Collector-base breakdown voltage     | $V_{(BR)CBO}$ | $I_C = -100\mu A, I_E = 0$         | -40 |      |      | V       |
| Collector-emitter breakdown voltage  | $V_{(BR)CEO}$ | $I_C = -10mA, I_B = 0$             | -30 |      |      | V       |
| Emitter-base breakdown voltage       | $V_{(BR)EBO}$ | $I_E = -100\mu A, I_C = 0$         | -6  |      |      | V       |
| Collector cut-off current            | $I_{CBO}$     | $V_{CB} = -40V, I_B = 0$           |     |      | -1   | $\mu A$ |
| Collector cut-off current            | $I_{CEO}$     | $V_{CB} = -30V, I_E = 0$           |     |      | -1   | $\mu A$ |
| Emitter cut-off current              | $I_{EBO}$     | $V_{EB} = -6V, I_C = 0$            |     |      | -1   | $\mu A$ |
| DC current gain                      | $h_{FE}$      | $V_{CE} = -2V, I_C = -1A$          | 60  | 160  | 400  |         |
|                                      |               | $V_{CE} = -2V, I_C = -20mA$        | 30  | 220  |      |         |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C = -2A, I_B = -0.2A$           |     | -0.3 | -0.5 | V       |
| Base-emitter saturation voltage      | $V_{BE(sat)}$ | $I_C = -2A, I_B = -0.2A$           |     | -1.0 | -2.0 | V       |
| Transition frequency                 | $f_T$         | $V_{CE} = -5V, I_C = -0.1A$        |     | 80   |      | MHz     |
| Collector output capacitance         | $C_{ob}$      | $V_{CB} = -10V, I_E = 0, f = 1MHz$ |     | 55   |      | pF      |

### CLASSIFICATION OF $h_{FE}$


| Rank  | R      | O       | Y       | G       |
|-------|--------|---------|---------|---------|
| Range | 60-120 | 100-200 | 160-320 | 200-400 |

# PNP Silicon Epitaxial Planar Transistor


**B772**

TYPICAL CHARACTERISTICS @  $T_a=25^\circ\text{C}$  unless otherwise specified


STATIC CHARACTERISTIC

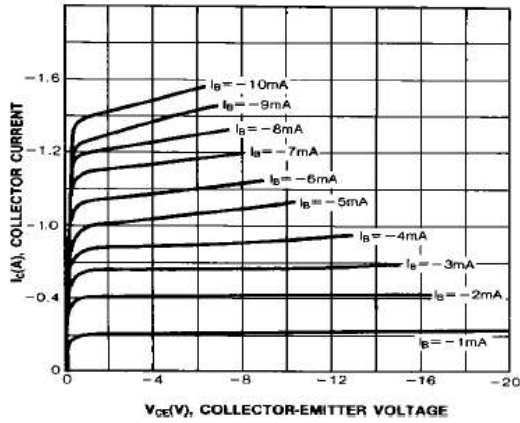


DC CURRENT GAIN

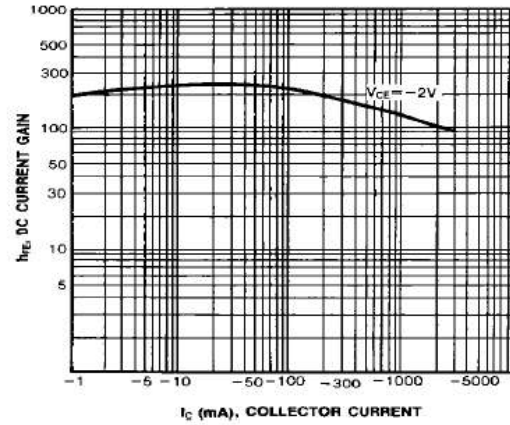


BASE-EMITTER SATURATION VOLTAGE  
COLLECTOR-EMITTER SATURATION VOLTAGE

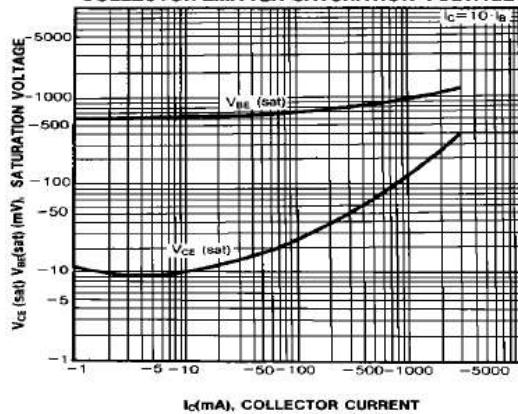


COLLECTOR OUTPUT CAPACITANCE

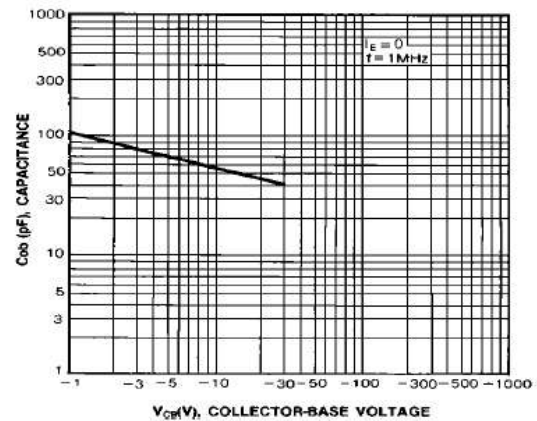

CURRENT GAIN-BANDWIDTH PRODUCT

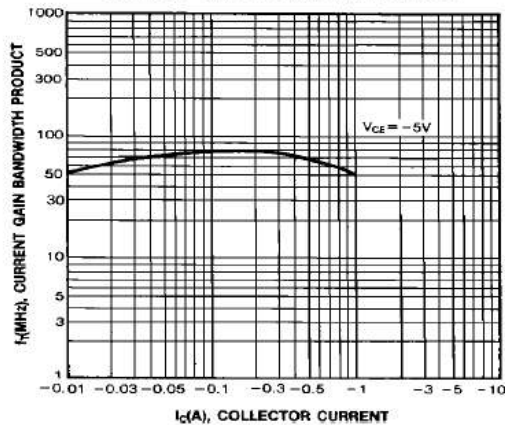

SAFE OPERATING AREA

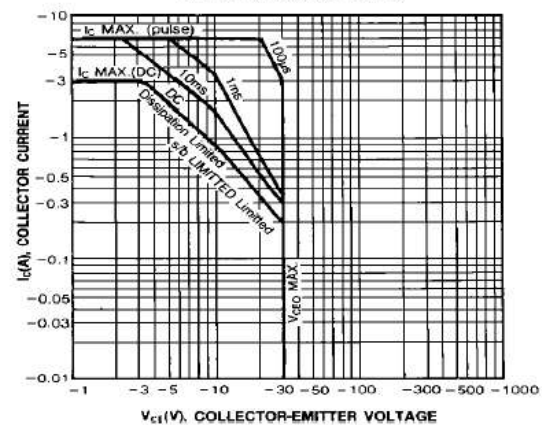


## PNP Silicon Epitaxial Planar Transistor

**B772**


### PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

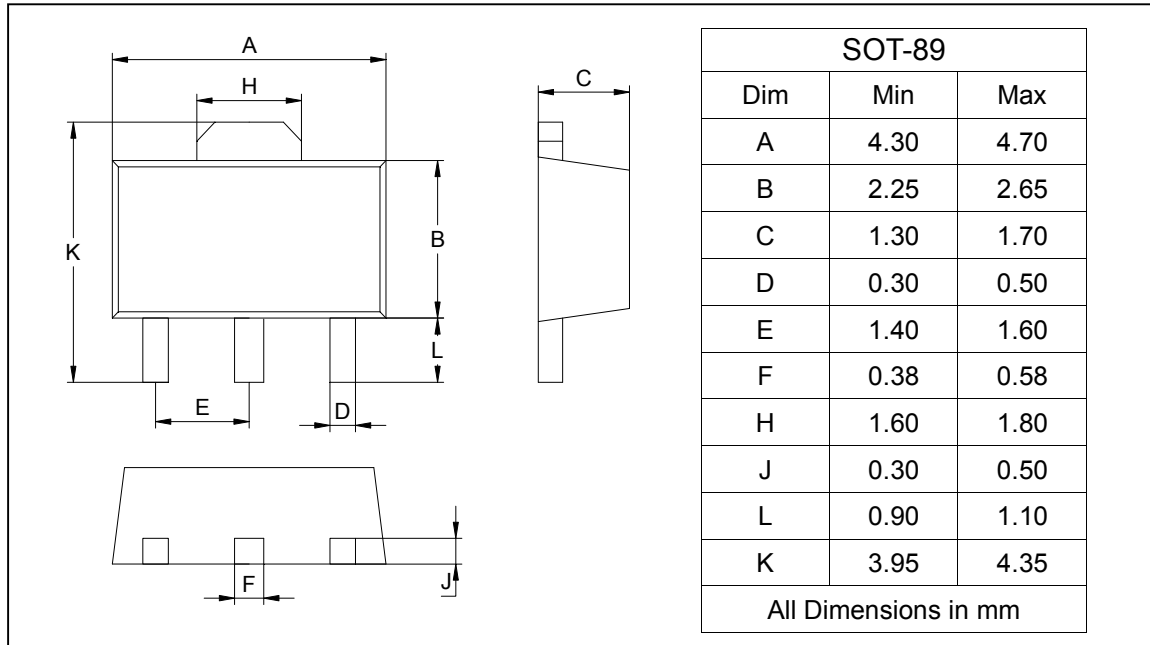

### SOLDERING FOOTPRINT

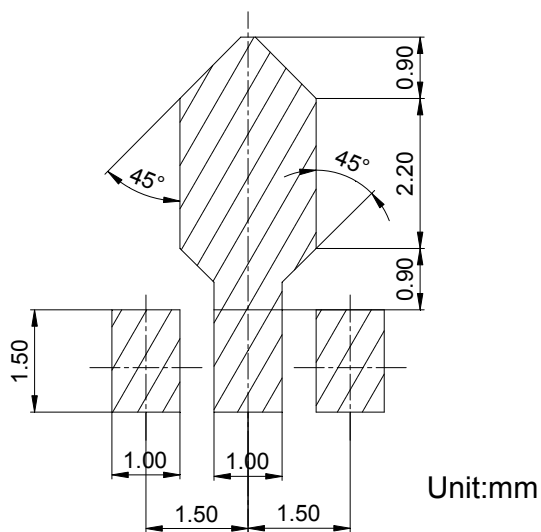

### PACKAGE INFORMATION

| Device | Package | Shipping       |
|--------|---------|----------------|
| B772   | SOT-89  | 1000/Tape&Reel |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for*** [Bipolar Transistors - BJT](#) ***category:***

***Click to view products by*** [Galaxy](#) ***manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)