




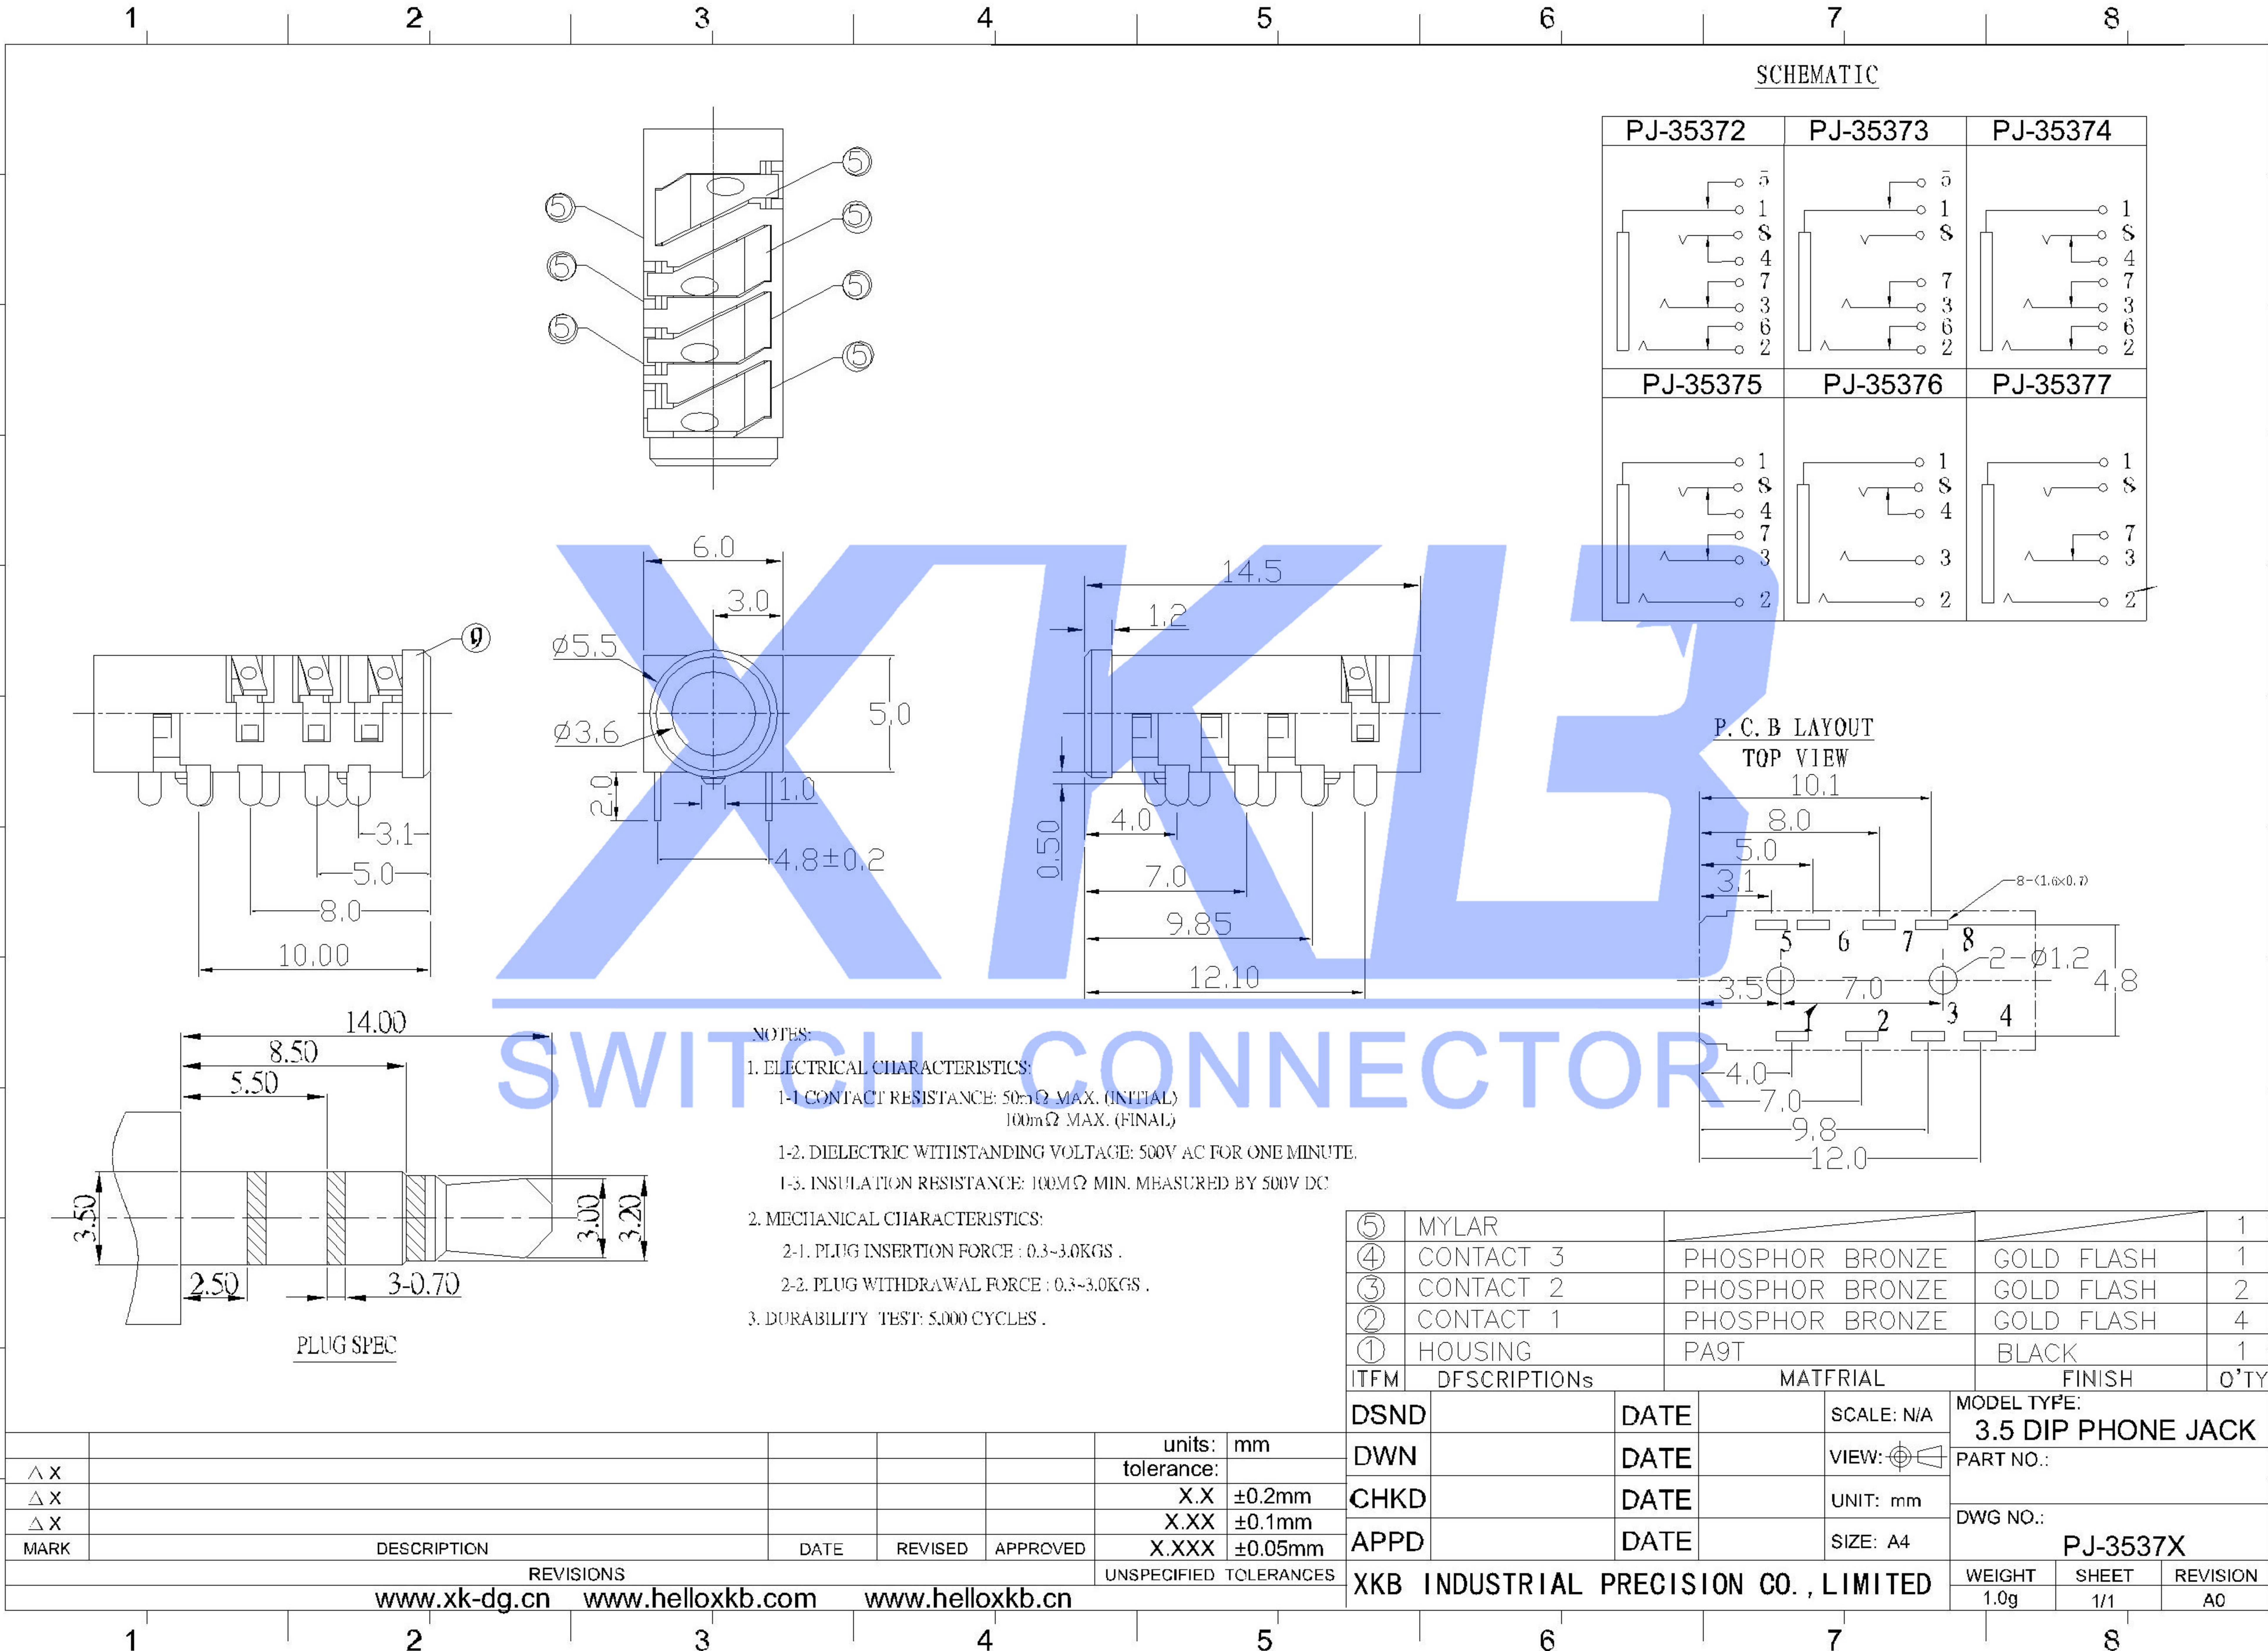

SCHEMATIC

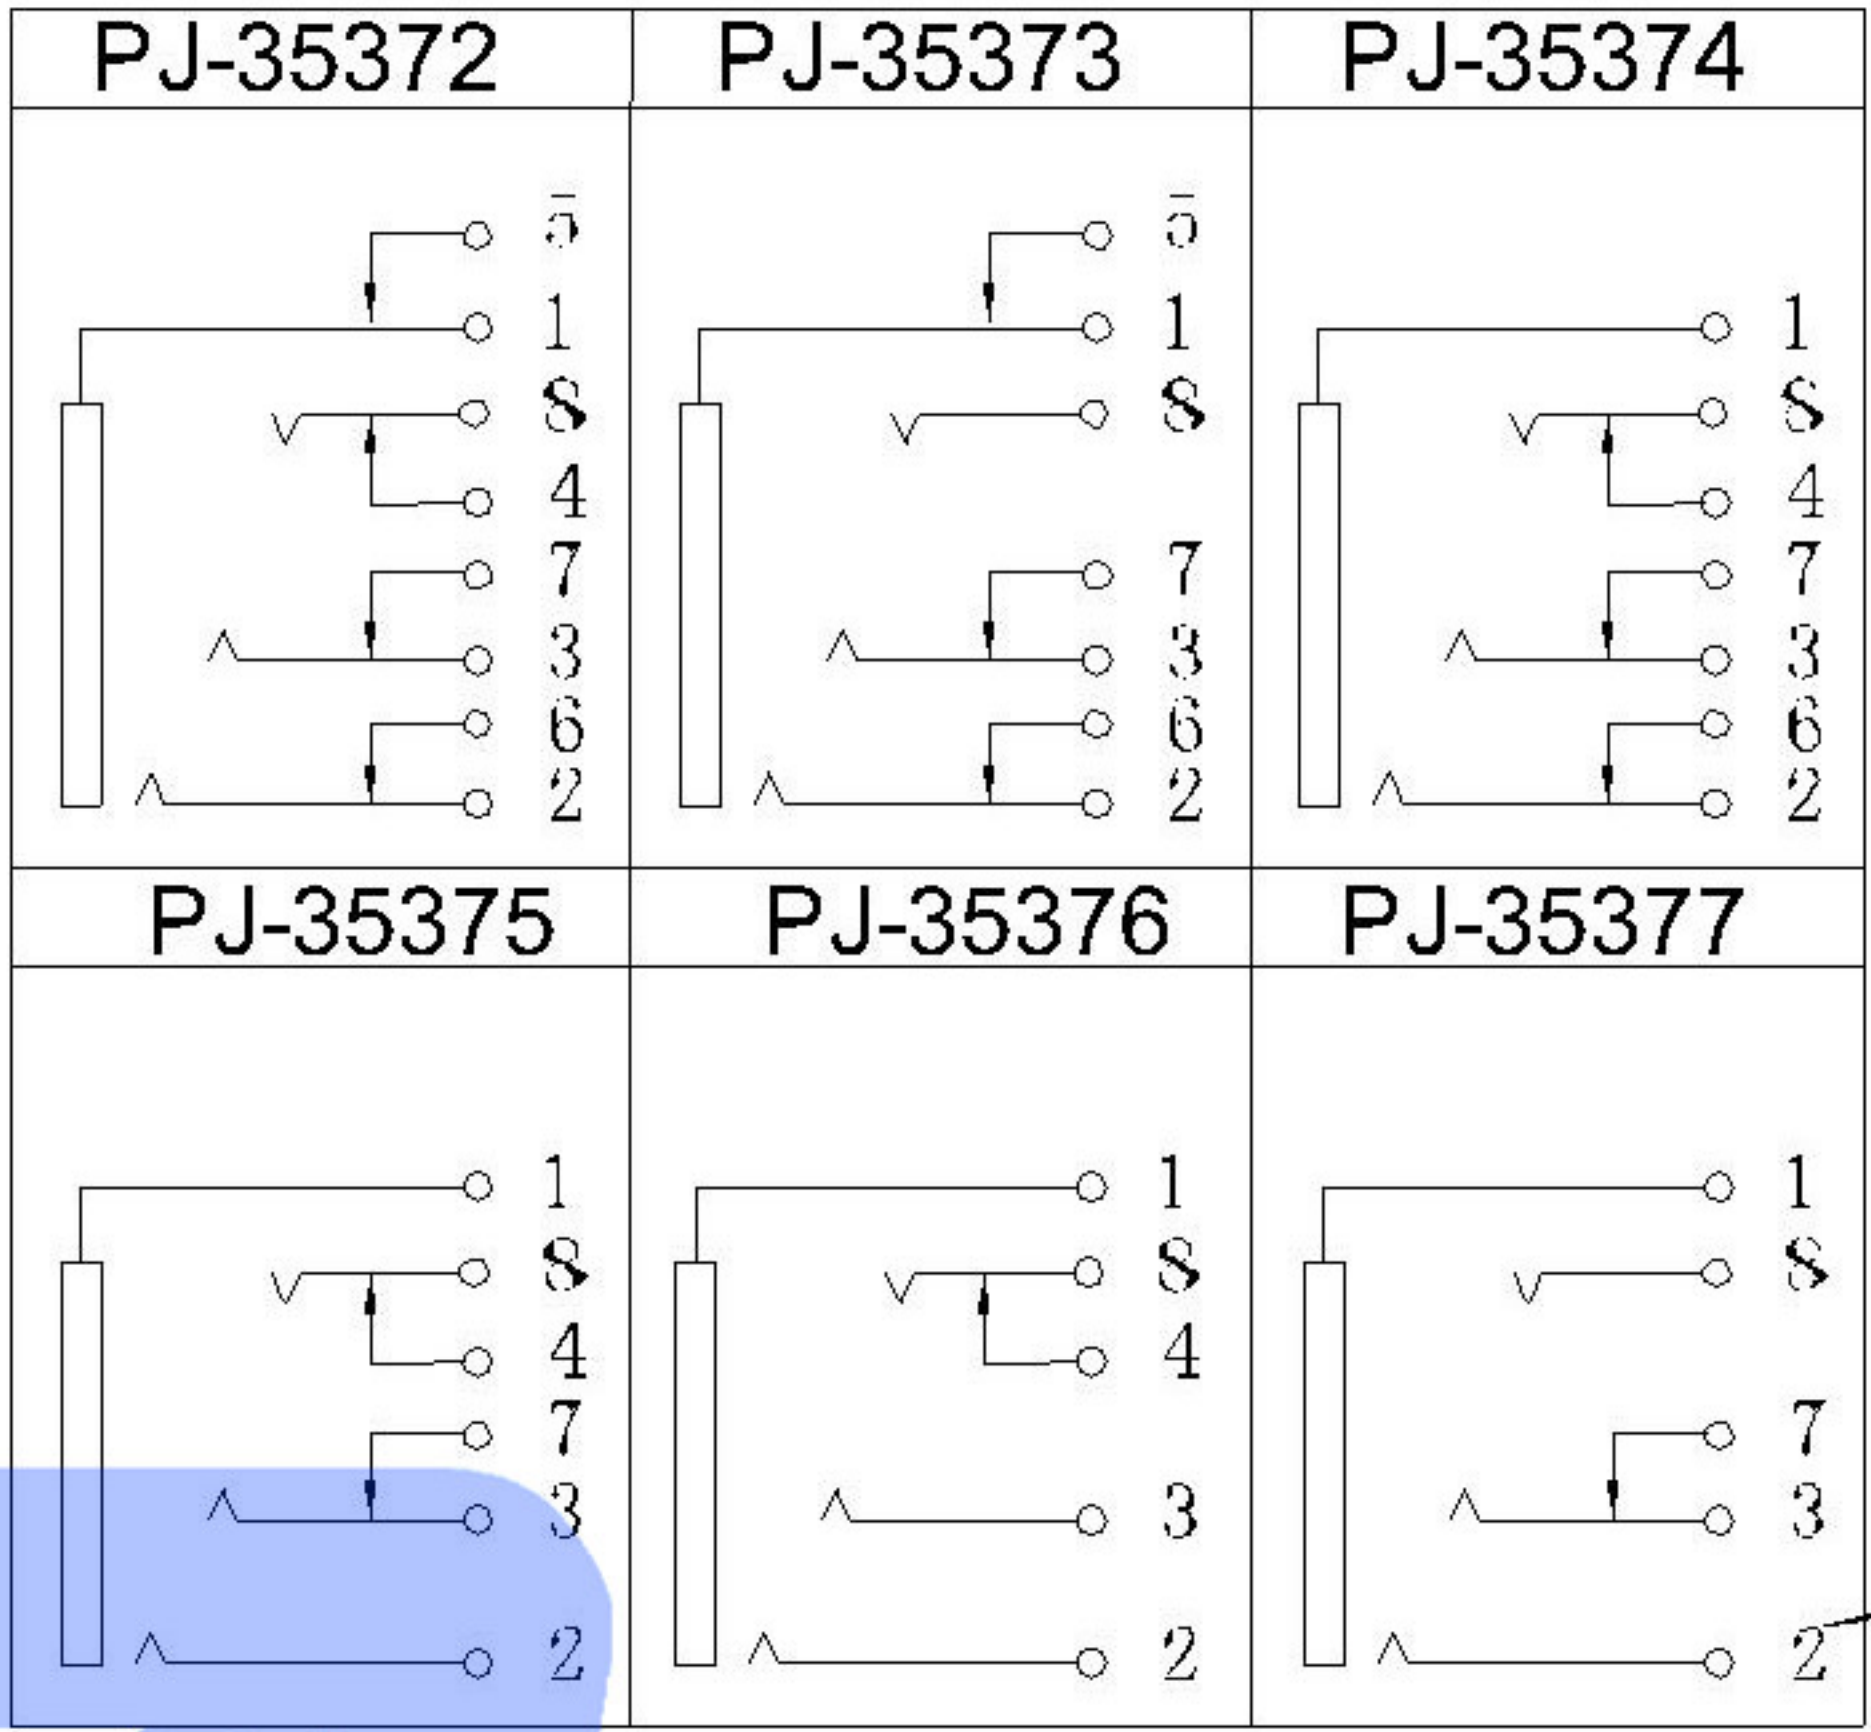

P.C.B. LAYOUT
TOP VIEW

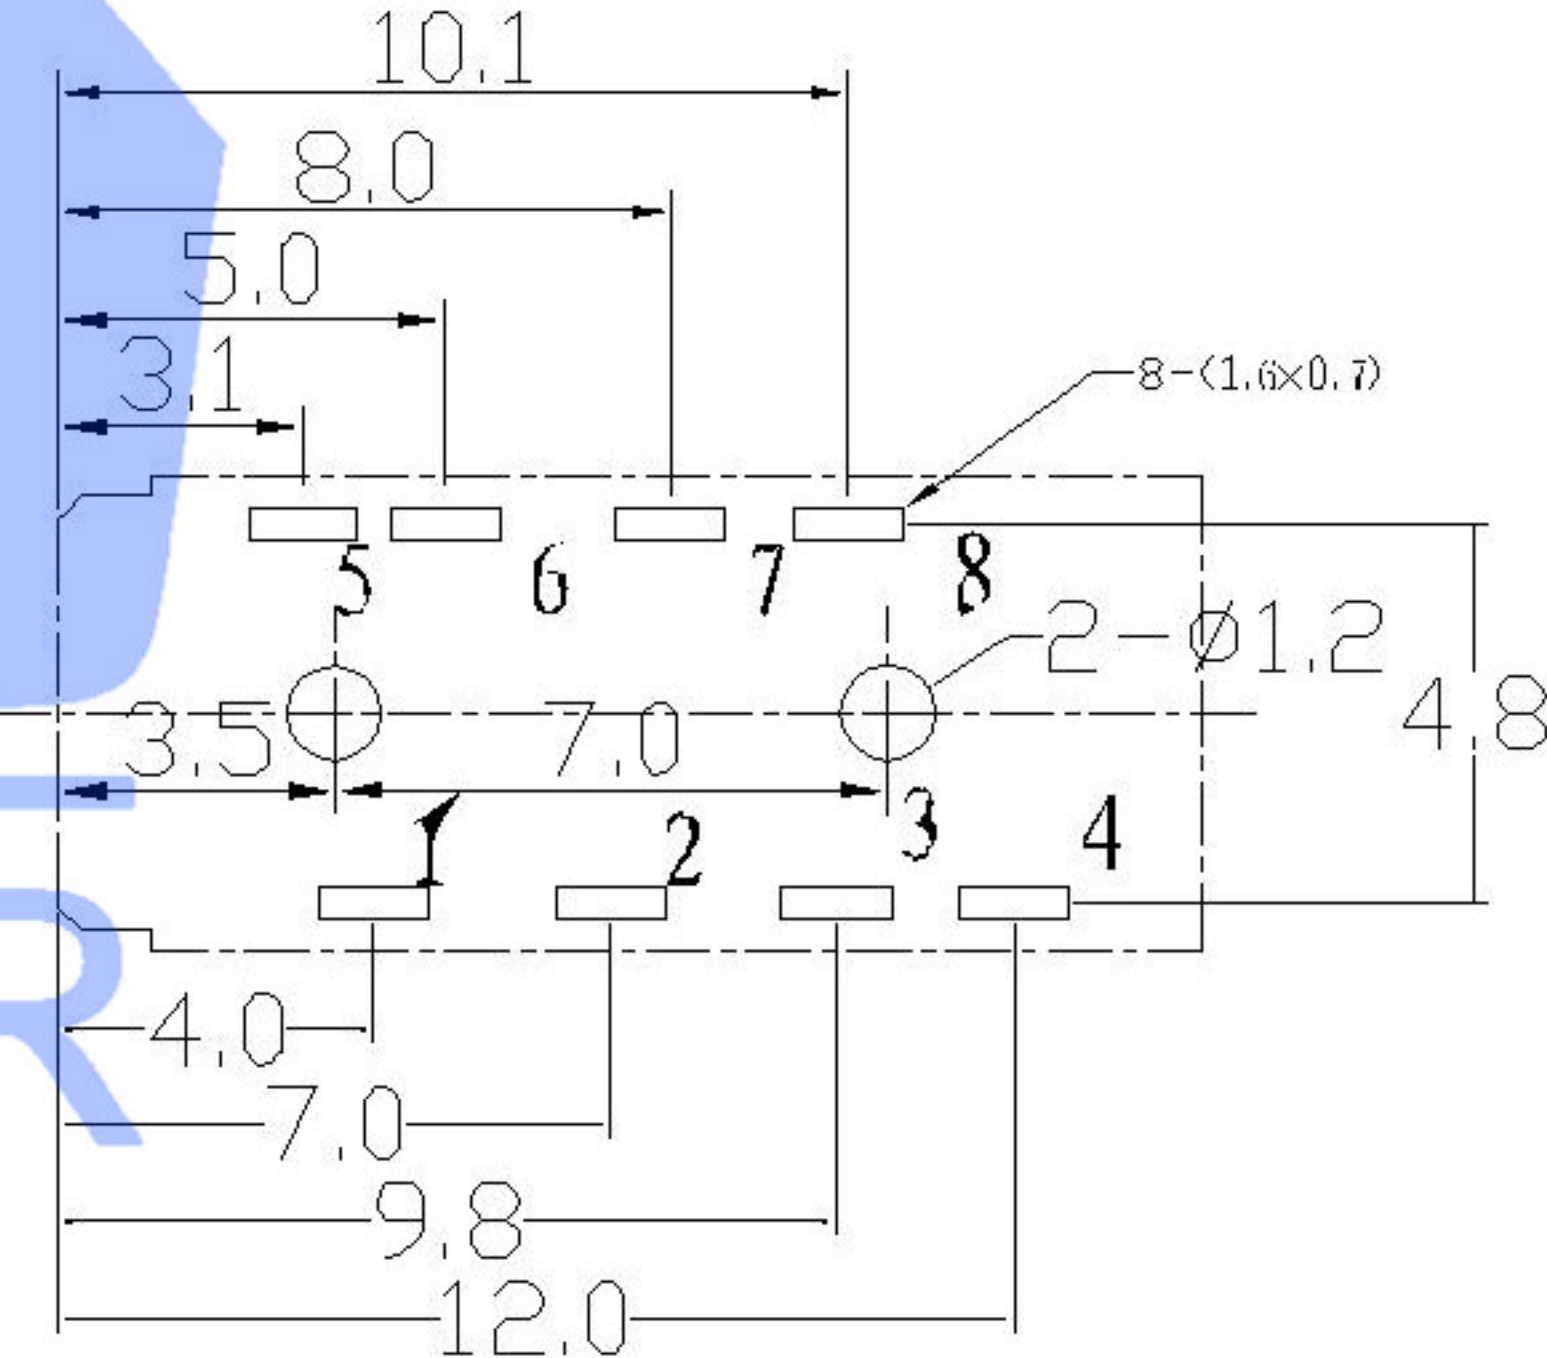

NOTES:

1. ELECTRICAL CHARACTERISTICS:
1-1. CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
100mΩ MAX. (FINAL)
1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
2-1. PLUG INSERTION FORCE : 0.3~3.0KGS .
2-2. PLUG WITHDRAWAL FORCE : 0.3~3.0KGS .
3. DURABILITY TEST: 5,000 CYCLES .

⑤	MYLAR			1
④	CONTACT 3	PHOSPHOR BRONZE	GOLD FLASH	1
③	CONTACT 2	PHOSPHOR BRONZE	GOLD FLASH	2
②	CONTACT 1	PHOSPHOR BRONZE	GOLD FLASH	4
①	HOUSING	PA9T	BLACK	1
ITFM	DESCRIPTIONs	MATFRIAL	FINISH	O'TY
DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 DIP PHONE JACK	
DWN	DATE	VIEW:	PART NO.:	
CHKD	DATE	UNIT: mm	DWG NO.:	
APPD	DATE	SIZE: A4	PJ-3537X	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g	SHEET 1/1
			REVISION A0	

					units: mm
△ X					tolerance:
△ X					X.X ±0.2mm
△ X					X.XX ±0.1mm
MARK					X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[60KD4M](#) [12DL6MX](#) [12JL6M](#) [17DN100-EX](#) [17DN101-EX](#) [SMD7FRA011](#) [16PJ224-E](#) [M55116/1-2](#) [KQLAX-8P](#) [164-229-6-5](#) [M55116/10-0](#)
[SMD5FRA021](#) [15AN84X](#) [13AL6FX](#) [61GA5F](#) [152-002-2-4](#) [0134 05](#) [MDC-004](#) [MDC-104](#) [MDC-204](#) [MDC-208](#) [12BPKG](#) [DC-001](#) [591-](#)
[0400](#) [591-0500](#) [DS1093-01-BN40](#) [593-0700](#) [MJ-372-4](#) [MJ-372-6](#) [MJ-372-8](#) [57PC5M](#) [591-0800](#) [592-0301](#) [592-0511](#) [164-377](#) [610-0520](#)
[0105 05](#) [0105 08](#) [0107 08-1](#) [690-0300](#) [0132 05](#) [930009200 MAB 4](#) [930071200 MAB 5 S](#) [930303517 MAB 3100 S GRAU](#) [930345200 MAB](#)
[8 S](#) [930356517 MAS 70 S GRAU](#) [930778500 MAB 6 H](#) [930959517 MAK 4100](#) [930961517 MAK 5100 S](#) [930964517 MAS 5100](#)