

[illegible]


X9556HF-02L-N0	PA66 UL 94V-0	X9556TM	X9556HM-L
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal








Poles	Dimensions (mm)	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	5.08
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

X9556 H F-02 L-N0 XX

01	02	03	04	05	06	07
Series No.						
① Category:						
H-HSG						
② Welding Board Angle:						
F-Female HGS						
③ Row No.-Pin No.:						
XX-Single row						
④ Special No.						
L-Empty pick up the left button						
⑤ Material:						
N0-P-A66 94V-0						
⑥ Color:						
Black-Natural Color						

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: $\geq 1000M\Omega$
 - Contact resistance: $\leq 20m\Omega$
 - After environmental testing : $\leq 30m\Omega$

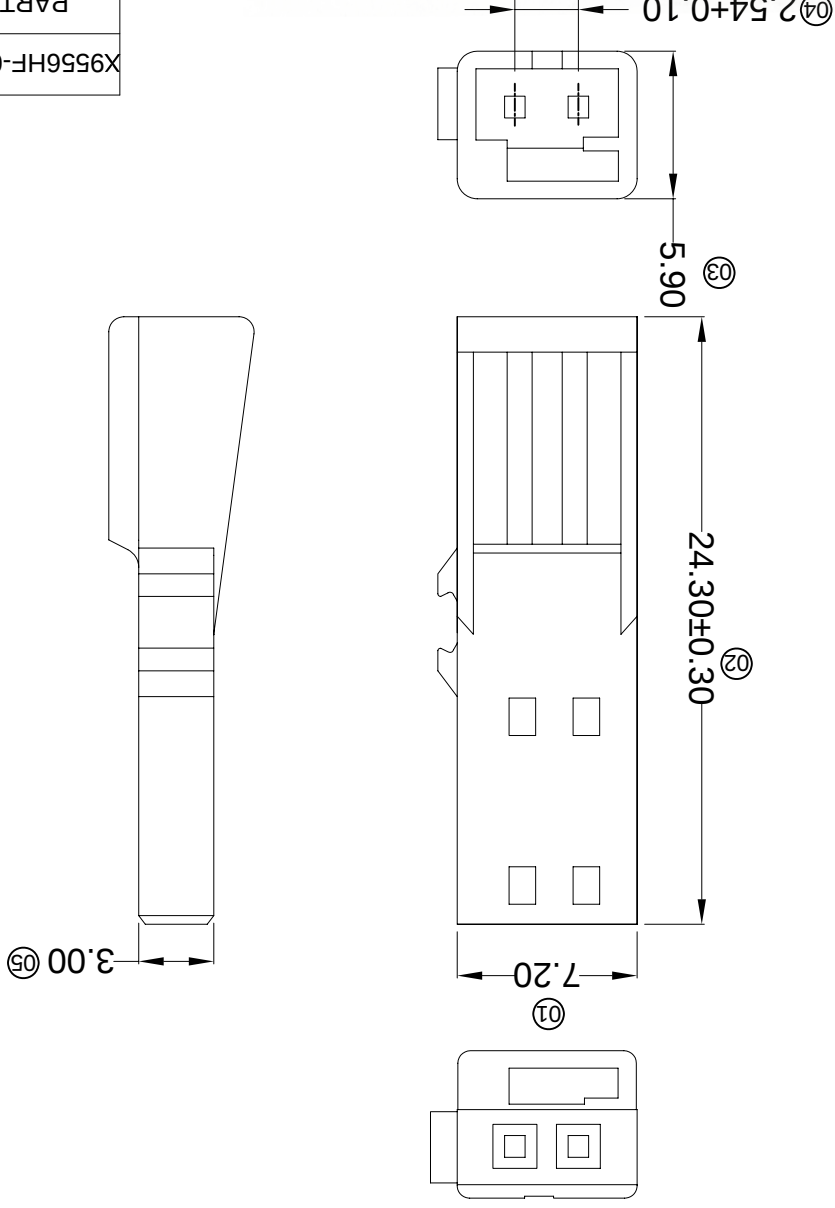

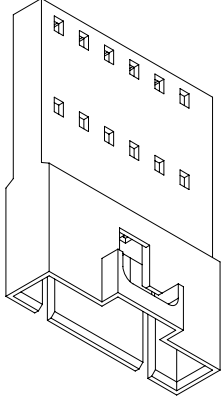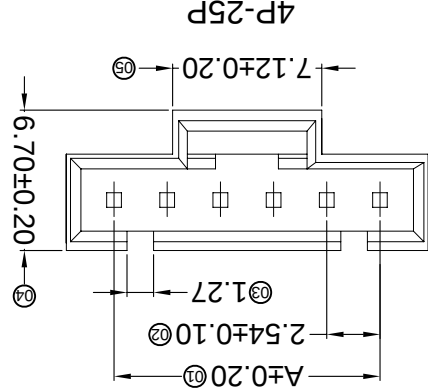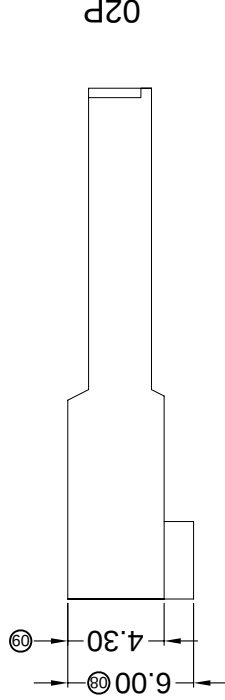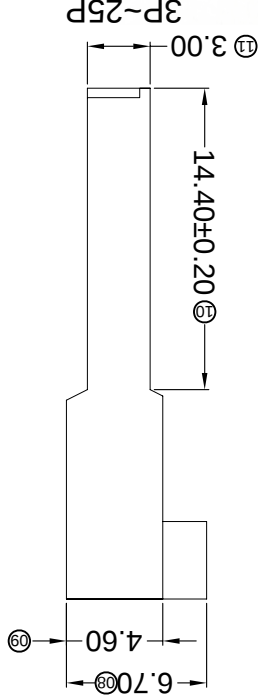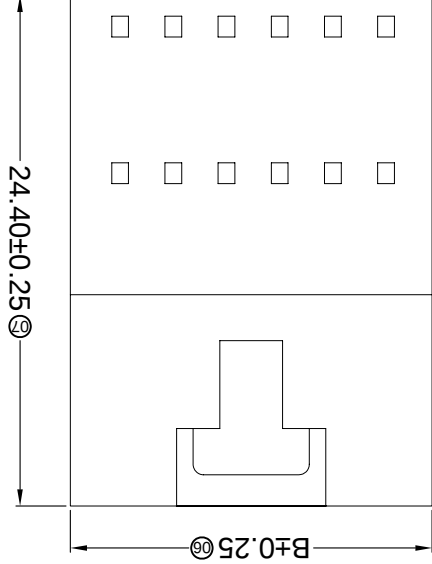[illegible][illegible]

- Specifications :**
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤30mΩ
- X9556 H F-XX X-PT XX ① ② ③ ④ ⑤ ⑥ ⑦
- Series No.
- ① Category: H-HSG
 - ② Welding Board Angle: F-Female HGS
 - ③ Row No.-Pin No.: XX-Single row
 - ④ Special No.
 - ⑤ Material: PT-PBT 94V-0
 - ⑥ Color: Blank-Natural Color
 - ⑦

For and on behalf of
KKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ± 0.5
△ X					16 < L ≤ 63 ± 0.4
△ X					4 < L ≤ 16 ± 0.3
					L ≤ 4 ± 0.2
					ANGULAR ± 5°

DSND	DATE	SCALE: N/A	MODEL TYPE: X9556H-XXA-N0
DWN	DATE	VIEW: 	PART NO.: 2.54mm Crimp Style Connectors
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	
KKB INDUSTRIAL PRECISION CO., LIMITED			
WEIGHT	1.0g	SHEET	1/1
REVISION	A0		






PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal
X9556H-XXA-N0	PA66 UL 94V-0	X9556T	X9556W

Poles		Dimensions (mm)	
A	B	A	B
02	2.54	09	20.32
03	5.08	10	22.86
04	7.62	11	25.40
05	10.16	12	27.94
06	12.70	13	30.48
07	15.24	14	33.02
08	17.78	15	35.56
09	20.32	16	38.10

- ① Series No.
② Category: H-HSG
③ Appearance type: Blank-Ordinary
④ Row No.-Pin No.: XX-02P~15P
⑤ Plug the Pin & special No.:
A-There are convex point
⑥ Material: NO-PA66 UL 94V-0
⑦ Color: Blank-Natural Color

X9556 H X-XX A-N0 XX
① ② ③ ④ ⑤ ⑥ ⑦

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤30mΩ

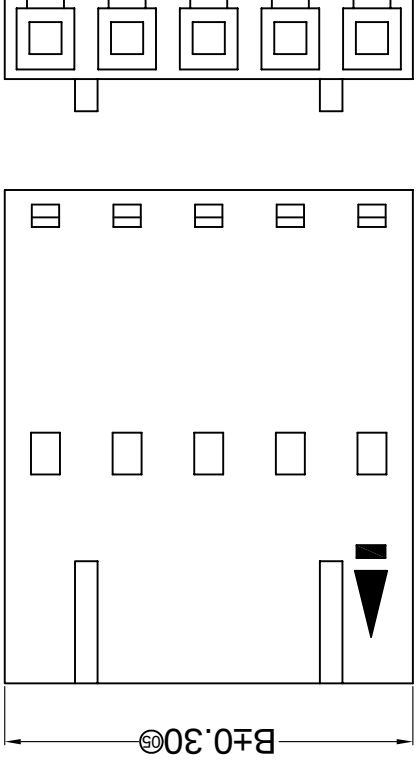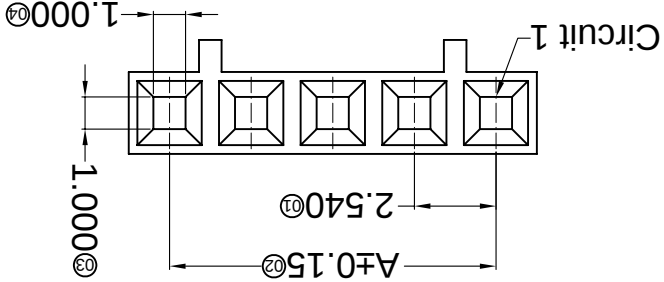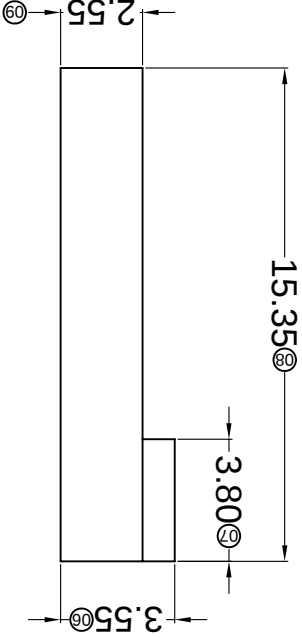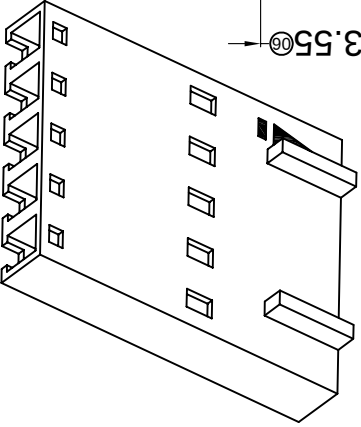



For and on behalf of
KKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

REVISIONS
Unauthorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ± 0.5
△ X					16 < L ≤ 63 ± 0.4
△ X					4 < L ≤ 16 ± 0.3
					L ≤ 4 ± 0.2
					ANGULAR ± 5°

DSND	DATE	SCALE: N/A	MODEL TYPE: X9556TM-PXXX
DWN	DATE	VIEW: 	PART NO.: 2.54 mm Crimp Style Connectors
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	
KKB INDUSTRIAL PRECISION CO., LIMITED			
	WEIGHT	1.0g	REVISION
	SHEET	1/1	A0

PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB
X9556TM-P-G01	Phosphor Bronze	AWG#22-26	1.63mm(Max)	Stamping Before Plating: 30u" Ni; Contact Area Gold Flash	X9556HF
X9556TM-P-SN				Stamping Before Plating: 30u" Ni; 70u" Sn	

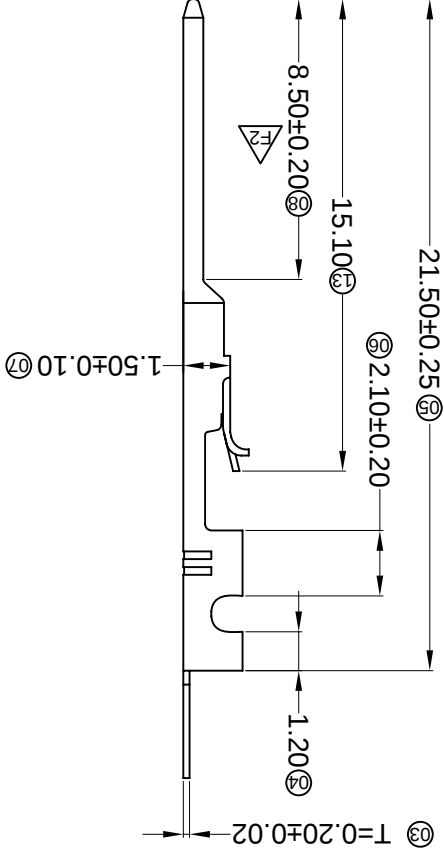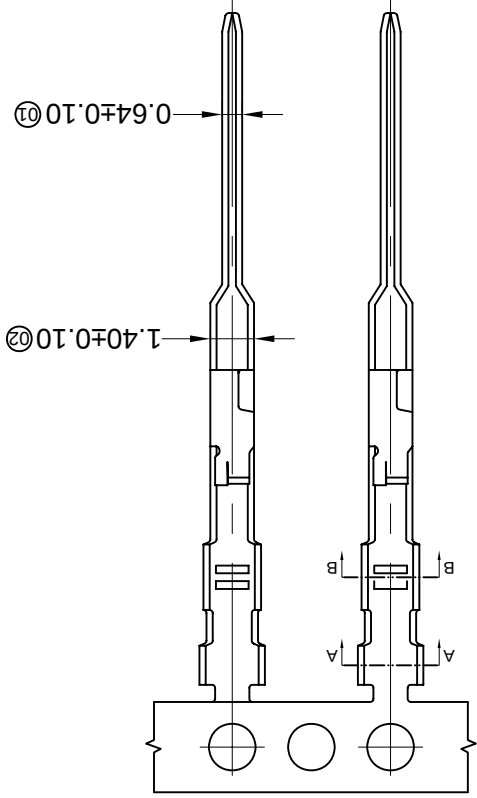

X9556 T M-P XX X-X

① Series Number

② Category: T-terminal

③ Shape: M-male

④ Material: P-Phosphor bronze

⑤ Plating style:

G01-Gold Plated Contact

⑥ Plating method:


SN-Bright tin plating

Blank-Stamping before plating

⑦ Mold No./Mark/Special No.

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing : ≤30mΩ

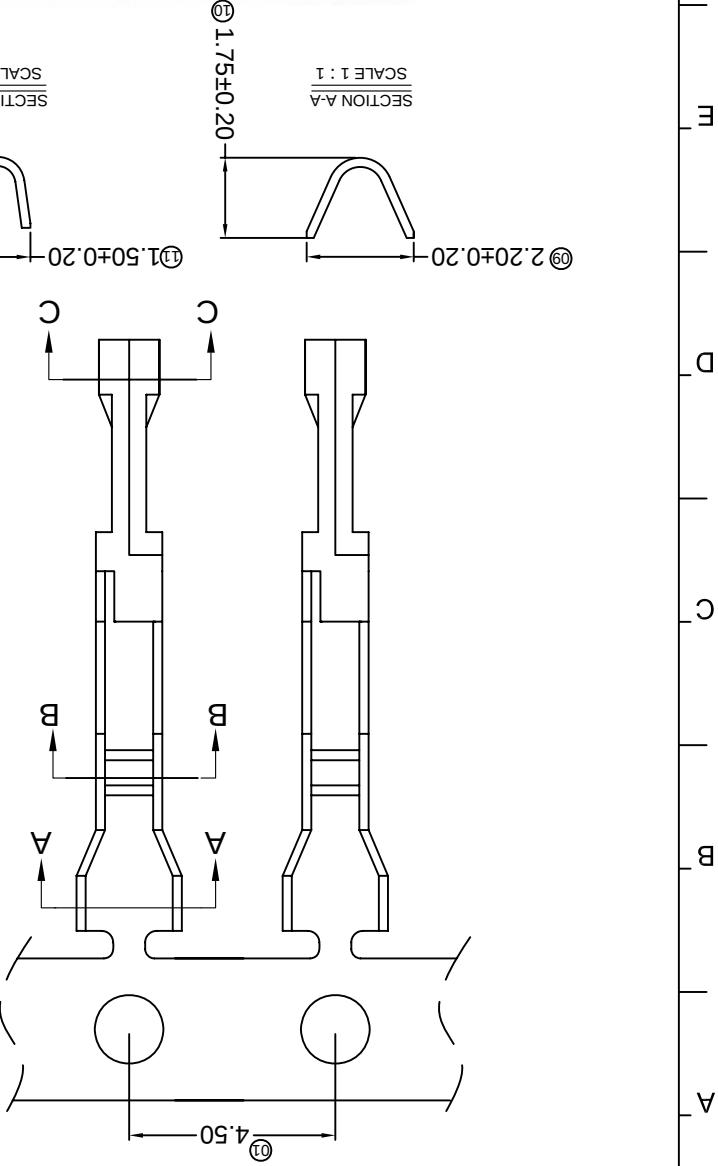

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ±0.5
△ X					16 < L ≤ 63 ±0.4
△ X					4 < L ≤ 16 ±0.3
					L ≤ 4 ±0.2
					ANGULAR ±5°

For and on behalf of
KKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

DSND	DATE	SCALE: N/A	MODEL TYPE:	X9556T-XX
DWN	DATE	VIEW:	PART NO.:	
CHKD	DATE	UNIT: mm	DWG NO.:	
APPD	DATE	SIZE: A4		
KKB INDUSTRIAL PRECISION CO., LIMITED				
		WEIGHT	1.0g	
		SHEET	1/1	
		REVISION	A0	

X9556 T XX - X XX X - X

㉑ Series Number

㉒ Category: T-terminal

㉓ Shape: Blank-ordinary

㉔ Material: P-Phosphor bronze ; B-brass

㉕ Plating style: G*-Gold-Plated Contact

㉖ *01-Gold Flash ;

㉗ *15-15u"

㉘ SN-Bright tin plating 70-120u"

㉙ 0-No plating material

㉚ Plating method:

㉛ Blank-Stamping before plating

㉜ B-Plating before stamping

㉝ Mold No./Mark/Special No.

㉞

㉟

㊱

㊲

㊳

㊴

㊵

㊶

㊷

㊸

㊹

㊺

㊻

㊼

㊽

㊾

㊿

Ⓚ

Ⓛ

Ⓜ

Ⓨ

Ⓩ

ⓐ

ⓑ

ⓒ

ⓓ

ⓔ

ⓕ

ⓖ

ⓗ

ⓘ

ⓙ

ⓚ

ⓛ

ⓜ

ⓝ

ⓞ

ⓟ

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿

ⓠ

ⓡ

ⓢ

ⓣ

ⓤ

⓶

⓷

⓸

⓹

⓺

⓻

⓼

⓽

⓿


ⓠ

ⓡ


ⓢ

ⓤ

⓶

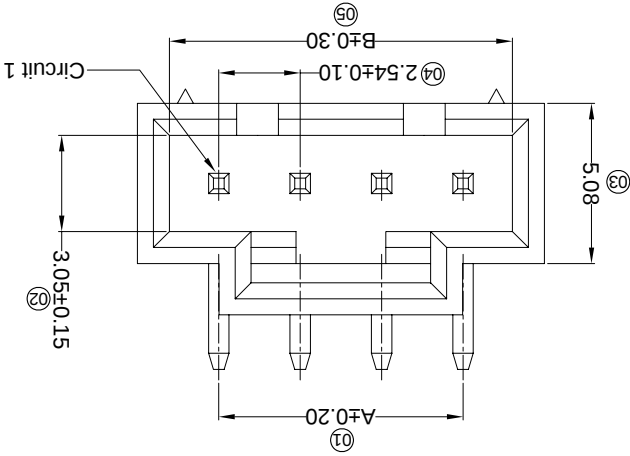

Recommmand PCB Layout



- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing : ≤30mΩ

X9556 W R XX- XXRB-NOV01 XX

Series No. ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Category: ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

W-water ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

R-90° ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Welding Board Angle: ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Blank-DIP ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Row No.-Pin No. ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

XX- Single row ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Special NO. ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

RB-Reverse bending ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Material: ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

NO-PA66 94V-0 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Plating Category: ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

V*:All Gold-Plated ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

*01-Gold Flash : *02-2u" ; *03-3u" ; *05-5u" ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

*10-10u" ; *15-15u" ; *30-30u" ; *50-50u" ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



SN-Bright tin plating 70u" ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

SN1-Bright tin plating 120u"Min. : ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

SW-Fog Tin plating ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Color: ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Blank-natural color ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


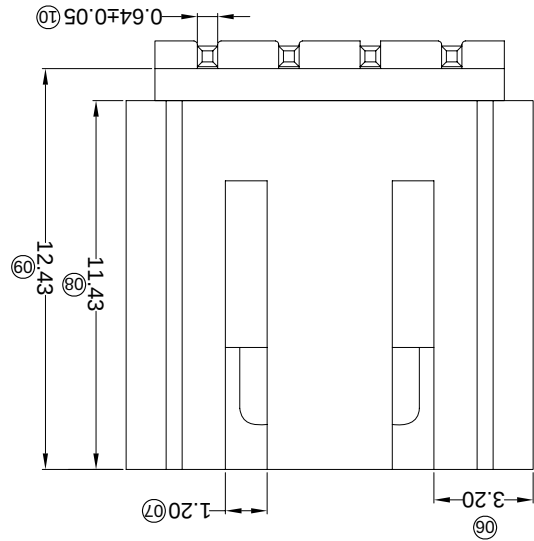
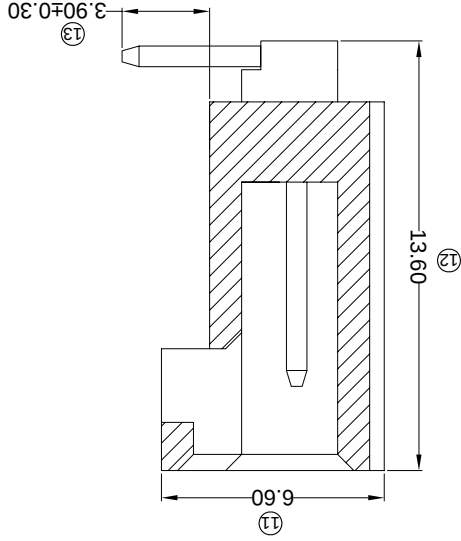


For and on behalf of
KKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ± 0.5
△ X					16 < L ≤ 63 ± 0.4
△ X					4 < L ≤ 16 ± 0.3
					L ≤ 4 ± 0.2
					ANGULAR ± 5°

DSND	DATE	SCALE: N/A	MODEL TYPE: X9556WR-XXRB-NOV01
DWN	DATE	VIEW: ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨	PART NO.: X9556WR-XXRB-NOV01
CHKD	DATE	UNIT: mm	DWG NO.: 2.54 mm Crimp Style Connectors
APPD	DATE	SIZE: A4	
KKB INDUSTRIAL PRECISION CO., LIMITED			
WEIGHT	SHEET	1/1	REVISION
1.0g			A0

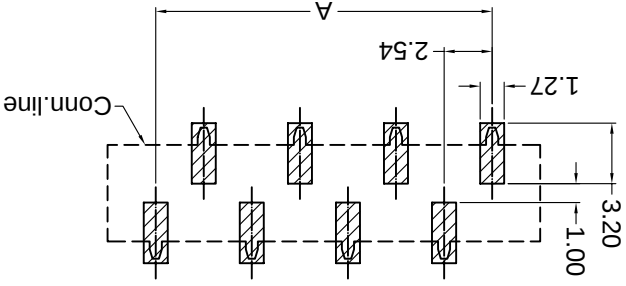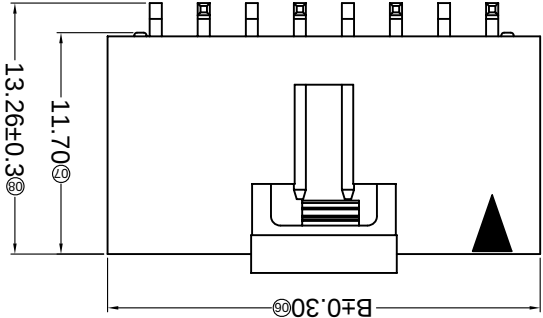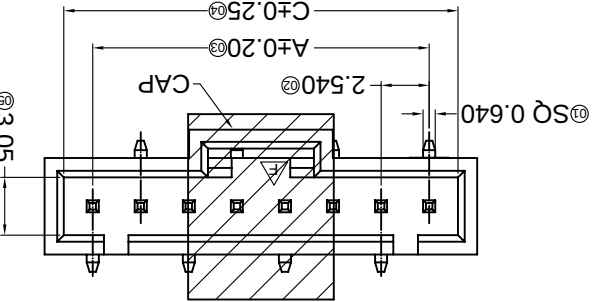

For and on behalf of
KKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

REVISIONS
Unauthorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					± 5°
△ X					ANGULAR
△ X					L ≤ 4
					± 0.2
					L ≤ 16
					± 0.3
					16 < L ≤ 63
					± 0.4
					L > 63
					± 0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: X9556WVS-XX-4TX
DWN	DATE	VIEW:	PART NO.: 2.54mm Crimp Style Connector
CHKD	DATE	UNIT: mm	DWG NO.: 1.0g
APPD	DATE	SIZE: A4	WEIGHT: 1.0g
			SHEET: 1/1
			REVISION: A0







PART NO	Material	Material(Pin)	Finish(Pin)	Suitable KKB Terminal
X9556WVS-XX-4TSW	PA 4T UL 94V-0	Brass	Matte Tin	X9556H
X9556WVS-XX-4TV01	PA 4T UL 94V-0	Brass	Gold-Flash	X9556H

Poles		Dimensions (mm)		Poles		Dimensions (mm)	
A	B	C		A	B	C	
02	2.54	7.62	5.59	12	27.94	33.02	30.99
03	5.08	10.16	8.13	13	30.48	35.56	33.53
04	7.62	12.70	10.67	14	33.02	38.10	36.07
05	10.16	15.24	13.21	15	35.56	40.64	38.61
06	12.70	17.78	15.75	16	38.10	43.18	41.15
07	15.24	20.32	18.29	17	40.64	45.72	43.69
08	17.78	22.86	20.83	18	43.18	48.26	46.23
09	20.32	25.40	23.37	19	45.72	50.80	48.77
10	22.86	27.94	25.91	20	48.26	53.34	51.31
11	25.40	30.48	28.45				

- ① Series No.
② Category: W-WAFER
③ Welding Board Angle: V-Straight 180°
④ Welding Way: S-SMT
⑤ Row No.-Pin No.: XX-02P~20P
⑥ Plug the Pin & Special No.:
⑦ Material: 4T -PA4T UL 94V-0
⑧ Plating Category: V01-Gold Flash
⑨ SW-Matte Tin Plating
⑩ Color : Blank-Natural Color Black

X9556 W V S-XX X-4T XX XX

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -40°C~+105°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing : ≤30mΩ

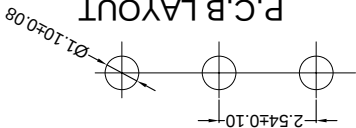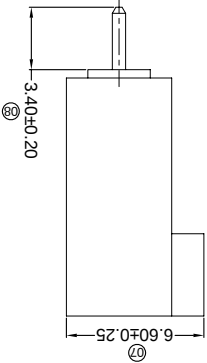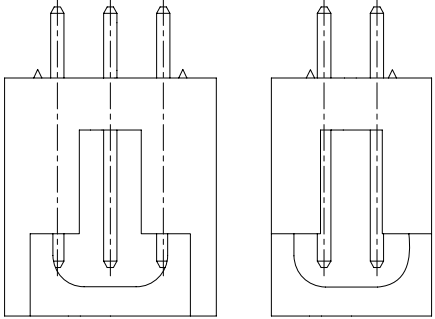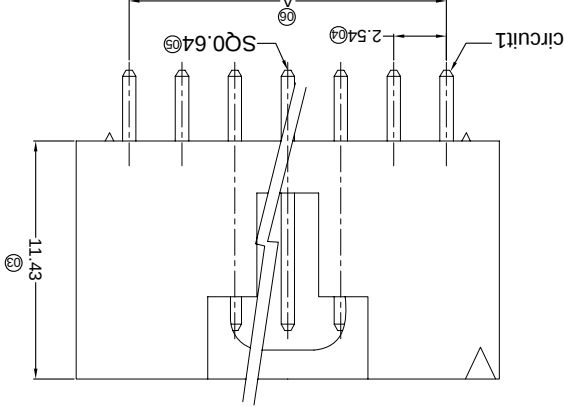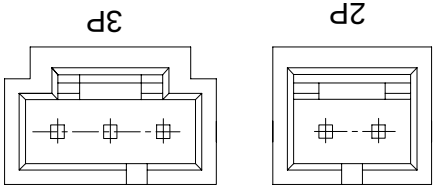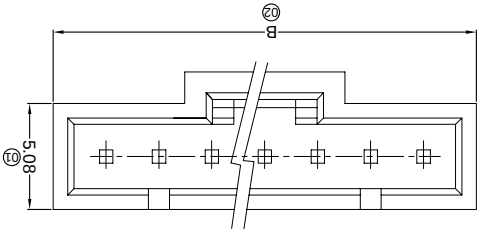

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤30mΩ

X9556 W V XX- XX X-N0XX XX

① Series No.

② Category:

③ Welding Board Angle:

④ Welding Way:

⑤ Row No.-Pin No.

⑥ Special NO.

⑦ Material:

⑧ Plating Category:

⑨ Color:

- *01-Gold Flash ; *02-2u" ; *03-3u" ; *05-5u"
*10-10u" ; *15-15u" ; *30-30u" ; *50-50u"
SN-Bright tin plating 70u"
SN1-Bright tin plating 120u"Min. ;
SW-Fog Tin plating
Blank-natural color

PART NO	Nylon 66 UL 94V-0	Material	Nylon 66 UL 94V-0	Material(Pin)	Finish(Pin)	Suitable XKB Terminal
X9556WV-XX-N0V15	Nylon 66 UL 94V-0	Brass	Gold-Plated 15u"	Brass	Gold-Plated 15u"	X9556H
X9556WV-XX-N0V01	Nylon 66 UL 94V-0	Brass	Gold-Flash	Brass	Gold-Flash	X9556H

DSND	DATE	SCALE: N/A	MODEL TYPE: X9556WV-XX-N0XX
DWN	DATE	VIEW:	PART NO.: 2.54 mm Crimp Style Connectors
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	REVISION
XKB INDUSTRIAL PRECISION CO., LIMITED			
WEIGHT 1.0g			
SHEET 1/1			
REVISION A0			

REVISIONS			
MARK	DESCRIPTION	DATE	REVISED
△ X			APPROVED
△ X			UNSPECIFIED TOLERANCES
△ X			±0.5
			L > 63
			16 < L ≤ 63
			4 < L ≤ 16
			L ≤ 4
			±0.2
			ANGULAR
			±5°

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)

DESCRIPTION

DATE

REVISED

APPROVED

UNSPECIFIED TOLERANCES

±0.5

L > 63

16 < L ≤ 63






4 < L ≤ 16

L ≤ 4

±0.2

ANGULAR

±5°

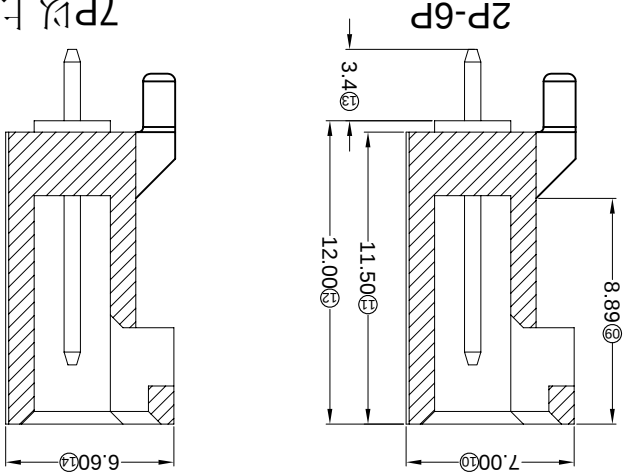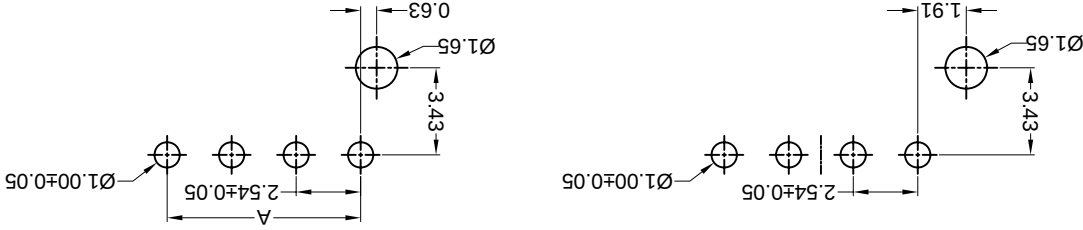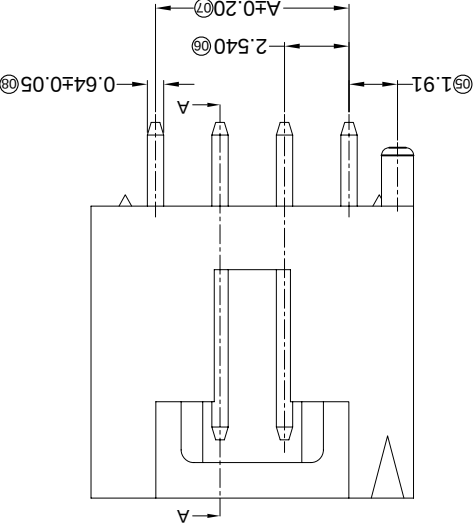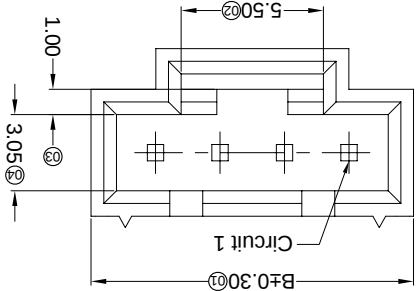

SECTION A-A
SCALE 1 : 1

PART NO	LCP UL 94V-0	Material	Brass	Finish(Pin)	Gold-Flash	Suitable XKB Terminal	X9556H
---------	--------------	----------	-------	-------------	------------	-----------------------	--------

Poles	Dimensions (mm)		Dimensions (mm)												
	A	B													
2	2.54	7.62	14	33.02	38.10	35.56	40.64	43.18	45.72	48.26	50.80	53.34	55.88	58.42	60.96
3	5.08	10.16	15	35.56	40.64	43.18	45.72	48.26	50.80	53.34	55.88	58.42	60.96	63.50	66.04
4	7.62	12.70	16	38.10	43.18	45.72	48.26	50.80	53.34	55.88	58.42	60.96	63.50	66.04	68.58
5	10.16	15.24	17	40.64	45.72	48.26	50.80	53.34	55.88	58.42	60.96	63.50	66.04	68.58	71.12
6	12.70	17.78	18	43.18	48.26	50.80	53.34	55.88	58.42	60.96	63.50	66.04	68.58	71.12	73.66
7	15.24	20.32	19	45.72	50.80	53.34	55.88	58.42	60.96	63.50	66.04	68.58	71.12	73.66	76.20
8	17.78	22.86	20	48.26	53.34	55.88	58.42	60.96	63.50	66.04	68.58	71.12	73.66	76.20	78.74
9	20.32	25.40	21	50.80	55.88	58.42	60.96	63.50	66.04	68.58	71.12	73.66	76.20	78.74	81.28
10	22.86	27.94	22	53.34	58.42	60.96	63.50	66.04	68.58	71.12	73.66	76.20	78.74	81.28	83.82
11	25.40	30.48	23	55.88	60.96	63.50	66.04	68.58	71.12	73.66	76.20	78.74	81.28	83.82	86.36
12	27.94	33.02	24	58.42	63.50	66.04	68.58	71.12	73.66	76.20	78.74	81.28	83.82	86.36	88.90
13	30.48	35.56													

- ① Series No. X9556 W V X-XX SX-LP XXX XX
- ② Category: W-water
- ③ Welding Board Angle: V- Straight 180°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-02P~24P
- ⑥ Plug the Pin & Special No.:
- ⑦ S-With Post,distance Pin 1.91mm;
- ⑧ S1-With Post ,distance Pin 0.63mm;
- ⑨ Material: LP-LCP 94V-0;
- ⑩ Plating Category: V01-Gold Flash;
- ⑪ Color: Blank-Natural Color

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing : ≤30mΩ

For and on behalf of
KKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
					L > 63	± 0.5
△ X					16 < L ≤ 63	± 0.4
△ X					4 < L ≤ 16	± 0.3
△ X					L ≤ 4	± 0.2
					ANGULAR	± 5°

DSND	DATE	SCALE: N/A	MODEL TYPE: X9556WV-XXSX-LPV01
DWN	DATE	VIEW:	PART NO.: 2.54 mm Crimp Style Connectors
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	

KKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g	SHEET 1/1	REVISION A0
---------------------------------------	--	--	-------------	-----------	-------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [XKB](#) *manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)