

HSF RoHS  CE

SPECIFICATIONS

Rated(额定参数): 300V, 8A

Dielectric strength(抗电强度): AC1500V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Temp. range(操作温度): $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70 ±1.00

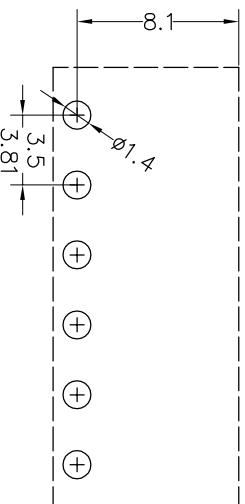
Ordering Information

JL15EDGRC - XXX XX G X 1


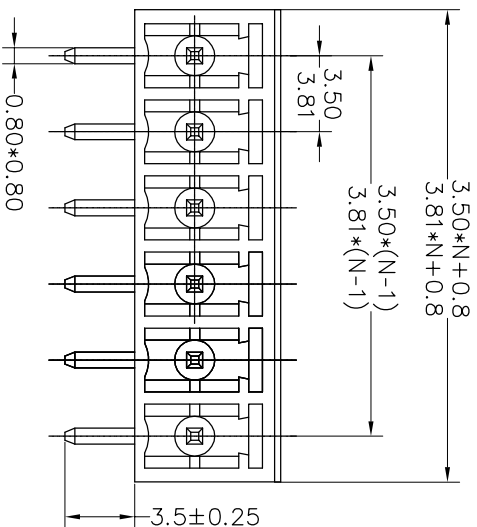
Pitch	No. of pins
350=3.5PH	2P~24P
381=3.81PH	

Housing Color	Packing
B=Black	0=Pe bag
G=Green	T=Tube
	A=Tray

W=White
Y=Yellow
O=Orange
E=Grey



Recommended P.C.B Layout(Top Side)

[illegible]

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [1546228-5](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1729386](#)