


Surface Mount Type

Series: **HB** Type: **V**

Long life



■ Features

- Endurance: 105 °C 2000 h
- 5.8 mm height (≤ ϕ6.3), 5.5 mm height max.
- Vibration-proof product is available upon request. (ϕ8 mm and larger)
- AEC-Q200 qualified*
- RoHS directive compliant

■ Specifications

Specifications									
Category Temp. Range	-40 °C to +105 °C								
Rated W.V. Range	4 V.DC to 50 V.DC								
Nominal Cap. Range	1 μF to 470 μF								
Capacitance Tolerance	±20 % (120 Hz/+20 °C)								
DC Leakage Current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (Bi-polar I ≤ 0.02 CV or 6 (μA) after 2 minutes) (Whichever is greater)								
tan δ	Please see the attached standard products list								
Characteristics at Low Temperature	W.V. (V)	4	6.3	10	16	25	35	50	(Impedance ratio at 120 Hz)
	Z(-25 °C)/Z(+20 °C)	7	4	3	2	2	2	2	
	Z(-40 °C)/Z(+20 °C)	15	8	6	4	4	3	3	
Endurance	After applying rated working voltage for 2000 hours (Bi-polar : 1000 hours for each polarity) at +105 °C±2 °C and then being stabilized at +20 °C, Capacitors shall meet the following limits.								
	Capacitance change	±20 % of inisial measured value (4 W.V. : ±35 % 6.3 W.V. : ±25 % ϕ4 to ϕ6.3), 5.5 mm max. : ±25 %							
	tan δ	≤ 200 % of initial specified value							
	DC leakage current	≤ initial specified value							
Shelf Life	After storage for 1000 hours at +105 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)								
Resistance to Soldering Heat	After reflow soldering and then being stabilized at +20°C, capacitors shall meet the following limits.								
	Capacitance change	±10 % of initial measured value							
	tan δ	≤ initial specified value							
	DC leakage current	≤ initial specified value							


■ Frequency correction factor for ripple current

	Frequency (Hz)			
	50, 60	120	1 k	10 k to
Correction factor	0.70	1.00	1.30	1.70

■ Marking

Example: 4 V 47 μF

Marking color: BLACK

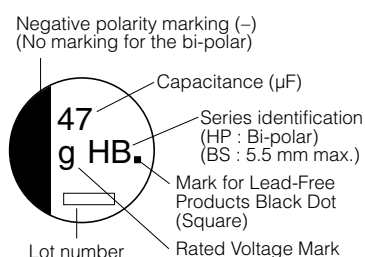


Rated Voltage Mark

g	4 V	E	25 V
j	6.3 V	V	35 V
A	10 V	H	50 V
C	16 V		

■ Dimensions in mm (not to scale)

(Unit : mm)

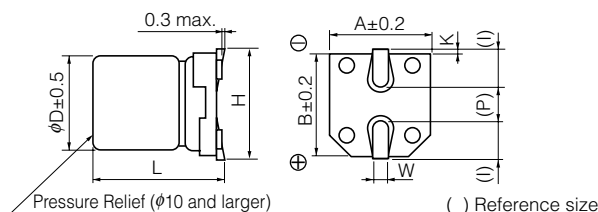

Size code	D	L	A, B	H	I	W	P	K
B	4.0	5.8±0.3	4.3	5.5 max.	1.8	0.65±0.1	1.0	0.35 ^{+0.15} _{-0.20}
C	5.0	5.8±0.3	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 ^{+0.15} _{-0.20}
D	6.3	5.8±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 ^{+0.15} _{-0.20}
E	8.0	6.2±0.3	8.3	9.5 max.	3.4	0.65±0.1	2.2	0.35 ^{+0.15} _{-0.20}
F	8.0	10.2±0.3	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.20
G	10.0	10.2±0.3	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.20

- 5.5 mm height max.

Size code	D	L	A, B	H	I	W	P	K
B	4.0	5.4 ^{+0.1} _{-0.2}	4.3	5.5 max.	1.8	0.65±0.1	1.0	0.35 ^{+0.15} _{-0.20}
C	5.0	5.4 ^{+0.1} _{-0.2}	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 ^{+0.15} _{-0.20}
D	6.3	5.4 ^{+0.1} _{-0.2}	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 ^{+0.15} _{-0.20}

* This product qualify for AEC-Q200, but it has some deviations.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

01 Sep. 2013

■ Standard Products

Endurance : 105 °C 2000 h

W.V.	Cap. (±20 %)	Case size			Specification		Part No. (RoHS:compliant)	Reflow	Min. Packaging Q'ty
		Dia.	Length	Size Code	Ripple Current (120 Hz) (+105 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)			Taping
(V)	(μF)	(mm)	(mm)						(pcs)
4	47	4	5.8	B	34	0.50	EEH0470R	(1)	2000
	100	5	5.8	C	61	0.50	EEH0101R	(1)	1000
	150	6.3	5.8	D	82	0.50	EEH0151P	(1)	1000
	220	6.3	5.8	D	82	0.50	EEH0221P	(1)	1000
6.3	22	4	5.8	B	26	0.30	EEH0220R	(1)	2000
	33	4	5.8	B	29	0.30	EEH0330R	(1)	2000
	47	5	5.8	C	46	0.30	EEH0470R	(1)	1000
	100	6.3	5.8	D	71	0.30	EEH0101P	(1)	1000
	220	8	10.2	F	150	0.35	EEH0221P	(2)	500
	330	8	10.2	F	230	0.35	EEH0331P	(2)	500
10	33	5	5.8	C	43	0.22	EEH10330R	(1)	1000
	100	8	6.2	E	110	0.26	EEH10101P	(2)	1000
	220	8	10.2	F	160	0.26	EEH10221P	(2)	500
	470	10	10.2	G	270	0.26	EEH10471P	(2)	500
16	10	4	5.8	B	28	0.16	EEH10100R	(1)	2000
	22	5	5.8	C	39	0.16	EEH10220R	(1)	1000
	47	6.3	5.8	D	70	0.16	EEH10470P	(1)	1000
	100	8	10.2	F	120	0.20	EEH10101P	(2)	500
	220	10	10.2	G	210	0.20	EEH10221P	(2)	500
	330	10	10.2	G	230	0.20	EEH10331P	(2)	500
25	4.7	4	5.8	B	22	0.14	EEH1047R	(1)	2000
	6.8	4	5.8	B	25	0.14	EEH1068R	(1)	2000
	33	6.3	5.8	D	65	0.14	EEH10330P	(1)	1000
	47	8	6.2	E	91	0.16	EEH10470P	(2)	1000
	100	8	10.2	F	130	0.16	EEH10101P	(2)	500
	220	10	10.2	G	190	0.16	EEH10221P	(2)	500
35	10	5	5.8	C	28	0.12	EEH10100R	(1)	1000
	22	6.3	5.8	D	55	0.12	EEH10220P	(1)	1000
	33	8	6.2	E	84	0.14	EEH10330P	(2)	1000
	47	8	10.2	F	98	0.14	EEH10470P	(2)	500
	100	10	10.2	G	160	0.14	EEH10101P	(2)	500
50	0.1	4	5.8	B	1	0.12	EEH101HR10R ***	(1)	2000
	0.22	4	5.8	B	2	0.12	EEH102HR22R ***	(1)	2000
	0.33	4	5.8	B	3	0.12	EEH103HR33R ***	(1)	2000
	0.47	4	5.8	B	5	0.12	EEH104HR47R ***	(1)	2000
	1	4	5.8	B	10	0.12	EEH101H1R0R	(1)	2000
	2.2	4	5.8	B	16	0.12	EEH102H2R2R	(1)	2000
	3.3	4	5.8	B	16	0.12	EEH103H3R3R	(1)	2000
	4.7	5	5.8	C	23	0.12	EEH104H4R7R	(1)	1000
	6.8	5	5.8	C	23	0.12	EEH106H6R8R	(1)	1000
	10	6.3	5.8	D	35	0.12	EEH101H100P	(1)	1000
	22	8	6.2	E	70	0.12	EEH102H220P	(2)	1000
	33	8	10.2	F	91	0.12	EEH103H330P	(2)	500
	47	10	10.2	G	100	0.12	EEH104H470P	(2)	500

*** Please kindly accept last shipment : 31/Mar/2015

· Please refer to the page of "Reflow Profile" and "The Taping Dimensions".

· When requesting vibration-proof product, please put the last "V" instead to "P"

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

01 Sep. 2013

■ Standard Products (Bi-polar)

Endurance : 105 °C 2000 h

W.V.	Cap. (±20 %)	Case size			Specification		Part No. (RoHS:compliant)	Reflow	Min. Packaging Q'ty
		Dia.	Length	Size Code	Ripple Current (120 Hz) (+105°C) (mA r.m.s.)	$\tan \delta$ (120 Hz) (+20 °C)			Taping
(V)	(μF)	(mm)	(mm)						(pcs)
6.3	47	6.3	5.8	D	35	0.60	EEEHP0J470P	(1)	1000
10	10	4	5.8	B	20	0.44	EEEHP1A100R	(1)	2000
	33	6.3	5.8	D	26	0.44	EEEHP1A330P	(1)	1000
16	10	5	5.8	C	25	0.32	EEEHP1C100R	(1)	1000
25	3.3	4	5.8	B	12	0.28	EEEHP1E3R3R	(1)	2000
	4.7	4	5.8	B	12	0.28	EEEHP1E4R7R	(1)	2000
	10	6.3	5.8	D	28	0.28	EEEHP1E100P	(1)	1000
	22	6.3	5.8	D	55	0.28	EEEHP1E220P	(1)	1000
35	2.2	4	5.8	B	10	0.24	EEEHP1V2R2R	(1)	2000
50	0.22	4	5.8	B	2	0.24	EEEHP1HR22R ***	(1)	2000
	0.33	4	5.8	B	3	0.24	EEEHP1HR33R ***	(1)	2000
	0.47	4	5.8	B	5	0.24	EEEHP1HR47R ***	(1)	2000
	1	4	5.8	B	10	0.24	EEEHP1H1R0R	(1)	2000
	3.3	6.3	5.8	D	16	0.24	EEEHP1H3R3P	(1)	1000
	4.7	6.3	5.8	D	23	0.24	EEEHP1H4R7P	(1)	1000

■ Standard Products (5.5 mm max.)

Endurance : 105 °C 2000 h

W.V.	Cap. (±20 %)	Case size			Specification		Part No. (RoHS:compliant)	Reflow	Min. Packaging Q'ty
		Dia.	Length	Size Code	Ripple Current (120 Hz) (+105°C) (mA r.m.s.)	$\tan \delta$ (120 Hz) (+20 °C)			Taping
(V)	(μF)	(mm)	(mm)						(pcs)
6.3	22	4	5.4	B	26	0.30	EEEHB0J220SR	(1)	2000
	47	5	5.4	C	46	0.30	EEEHB0J470SR	(1)	1000
	100	6.3	5.4	D	71	0.30	EEEHB0J101SP	(1)	1000
10	33	5	5.4	C	43	0.22	EEEHB1A330SR	(1)	1000
16	10	4	5.4	B	28	0.16	EEEHB1C100SR	(1)	2000
	22	5	5.4	C	39	0.16	EEEHB1C220SR	(1)	1000
	47	6.3	5.4	D	70	0.16	EEEHB1C470SP	(1)	1000
25	4.7	4	5.4	B	22	0.14	EEEHB1E4R7SR	(1)	2000
	6.8	4	5.4	B	25	0.14	EEEHB1E6R8SR	(1)	2000
	33	6.3	5.4	D	65	0.14	EEEHB1E330SP	(1)	1000
35	10	5	5.4	C	28	0.12	EEEHB1V100SR	(1)	1000
	22	6.3	5.4	D	55	0.12	EEEHB1V220SP	(1)	1000
50	0.1	4	5.4	B	1	0.12	EEEHB1HR10SR ***	(1)	2000
	0.22	4	5.4	B	2	0.12	EEEHB1HR22SR ***	(1)	2000
	0.33	4	5.4	B	3	0.12	EEEHB1HR33SR ***	(1)	2000
	0.47	4	5.4	B	5	0.12	EEEHB1HR47SR ***	(1)	2000
	1	4	5.4	B	10	0.12	EEEHB1H1R0SR	(1)	2000
	2.2	4	5.4	B	16	0.12	EEEHB1H2R2SR	(1)	2000
	3.3	4	5.4	B	16	0.12	EEEHB1H3R3SR	(1)	2000
	4.7	5	5.4	C	23	0.12	EEEHB1H4R7SR	(1)	1000
	6.8	5	5.4	C	23	0.12	EEEHB1H6R8SR	(1)	1000
	10	6.3	5.4	D	35	0.12	EEEHB1H100SP	(1)	1000

*** Please kindly accept last shipment : 31/Mar/2015

- Please refer to the page of "Reflow Profile" and "The Taping Dimensions".
- When requesting vibration-proof product, please put the last "V" instead to "P"

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminum Electrolytic Capacitors - Leaded](#) **category:**

Click to view products by [Panasonic](#) **manufacturer:**

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)