

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/16/270F SN OR BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

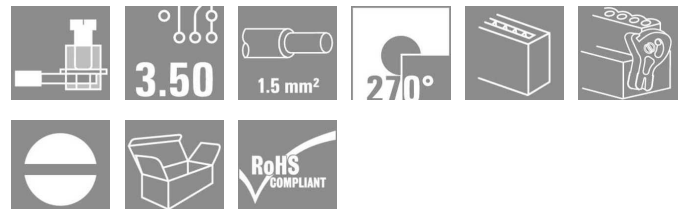

Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They provide space for labelling and can be coded.

General ordering data

Type	BL 3.50/16/270F SN OR BX
Order No.	1640070000
Version	PCB plug-in connector, female plug, 3.50 mm, No. of poles: 16, 270°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm², Box
GTIN (EAN)	4008190277628
Qty.	50 pc(s).
Product data	IEC: 320 V / 12 A / 0.2 - 1.5 mm² UL: 300 V / 8 A / AWG 28 - AWG 14
Packaging	Box

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Net weight	16.44 g
------------	---------

System parameters

Product family	OMNIMATE Signal - series BL/SL 3.50	Wire connection method	Clamping yoke connection
Pitch in mm (P)	3.5 mm	Pitch in inches (P)	0.138 inch
Conductor outlet direction	270°	No. of poles	16
L1 in mm	52.5 mm	L1 in inches	2.067 inch
Number of rows	1	Pin series quantity	1
Rated cross-section	1.5 mm ²	Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch
Touch-safe protection acc. to DIN VDE 0470	IP 20	Can be coded	Yes
Stripping length	6 mm	Tightening torque for screw flange, min.	0.2 Nm
Tightening torque for screw flange, max.	0.25 Nm	Tightening torque, min.	0.2 Nm
Tightening torque, max.	0.25 Nm	Clamping screw	M 2
Screwdriver blade	0.4 x 2.5	Screwdriver blade standard	DIN 5264
Plugging cycles	25	push-in force/pole	10 N
Withdrawal force per pole	4 N	Packaging	Box

Material data

Insulating material	PBT	Colour	Orange
Colour chart (similar)	RAL 2000	Insulating material group	IIIa
CTI	≥ 200	Insulation resistance	≥ 10 ⁸ Ω
UL 94 flammability rating	V-0	Contact material	Cu-Leg
Contact surface	tinned	Layer structure of plug contact	4-8 µm Sn hot-dip tinned
Storage temperature, min.	-25 °C	Storage temperature, max.	55 °C
Max. relative humidity during storage	80 %	Operating temperature, min.	-50 °C
Operating temperature, max.	100 °C	Temperature range, installation, min.	-30 °C
Temperature range, installation, max.	100 °C		

Conductors suitable for connection

Clamping range, rated connection, min.	0.08 mm ²	Clamping range, rated connection, max.	1.5 mm ²
Wire connection cross section AWG, min.	AWG 28	Wire connection cross section AWG, max.	AWG 14
Solid, min. H05(07) V-U	0.2 mm ²	Solid, max. H05(07) V-U	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²	Flexible, max. H05(07) V-K	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm ²	w. plastic collar ferrule, DIN 46228 pt 4, max.	1.5 mm ²
w. wire end ferrule, DIN 46228 pt 1, min.	0.2 mm ²	w. wire end ferrule, DIN 46228 pt 1, max.	1.5 mm ²
Plug gauge acc. to EN 60999 a x b; Ø	2.4 mm x 1.5 mm		

OMNIMATE Signal - series BL/SL 3.50
BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Rated data acc. to IEC

tested acc. to standard	IEC 60664-1, IEC 61984	Rated current, min. no. of poles (Ta = 20°C)	12 A
Rated current, max. no. of poles (Ta = 20°C)	10 A	Rated current, min. no. of poles (Ta = 40°C)	10 A
Rated current, max. no. of poles (Ta = 40°C)	8 A	Rated voltage for surge voltage class / pollution degree II/2	320 V
Rated voltage for surge voltage class / pollution degree III/2	160 V	Rated voltage for surge voltage class / pollution degree III/3	160 V
Rated impulse voltage for surge voltage class/ pollution degree II/2	2.5 kV	Rated impulse voltage for surge voltage class/ pollution degree III/2	2.5 kV
Rated impulse voltage for surge voltage class/ contamination degree III/3	2.5 kV	Short-time withstand current resistance	3 x 1s with 100 A

Rated data acc. to CSA

Institute (CSA)		Certificate No. (CSA)	154685-1318353
Rated voltage (Use group B)	300 V	Rated voltage (use group D)	300 V
Rated current (use group B)	10 A	Rated current (use group D)	10 A
Wire cross-section, AWG, min.	AWG 28	Wire cross-section, AWG, max.	AWG 14
Reference to approval values	Specifications are maximum values, details - see approval certificate.		

Rated data acc. to UL 1059

Institute (UR)		Certificate No. (UR)	E60693
Rated voltage (use group B)	300 V	Rated voltage (use group D)	300 V
Rated current (use group B)	8 A	Rated current (use group D)	8 A
Wire cross-section, AWG, min.	AWG 28	Wire cross-section, AWG, max.	AWG 14
Reference to approval values	Specifications are maximum values, details - see approval certificate.		

Classifications

ETIM 3.0	EC001284	ETIM 4.0	EC002637
ETIM 5.0	EC002637	ETIM 6.0	EC002637
UNSPSC	30-21-18-10	eClass 5.1	27-26-07-04
eClass 6.2	27-26-07-04	eClass 7.1	27-44-04-02
eClass 8.1	27-44-04-02	eClass 9.0	27-44-04-02

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/16/270F SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Notes**

Notes

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Max. outer diameter of the conductor: 2.9 mm
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

IPC conformity

The products are developed, manufactured and delivered according to the internationally recognised IPC-A-610 standard, category "permissible". More extensive demands on the products can be evaluated on request.

Approvals

Approvals






ROHS

Conform

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

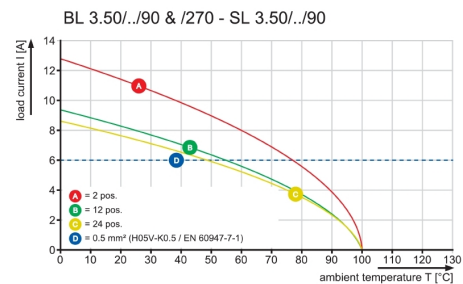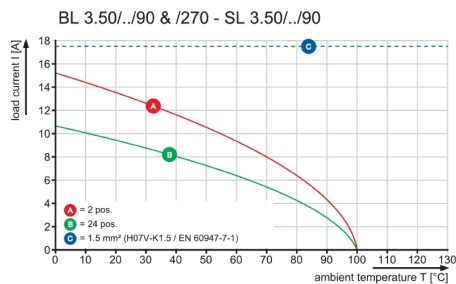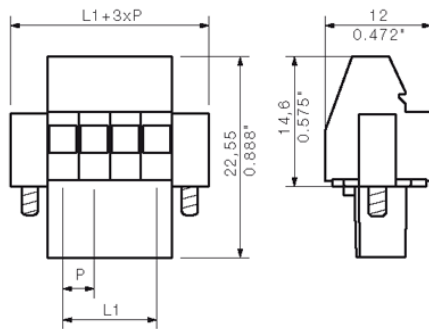


OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL 3.50/90G




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1605210000	PCB plug-in connector, male	4008190129255	50 pc(s).	IEC: 320 V / 17 A	Box
3.50/16/90G		header, closed side, THT			UL: 300 V / 10 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 16, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

SLD 3.50V/180G



Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data


Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1641180000	PCB plug-in connector, male	4008190279585	10 pc(s).	IEC: 200 V / 10.5 A	Box
3.50V/32/180G		header, closed side, THT			UL: 300 V / 8 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 32, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL 3.50/180G




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1604610000	PCB plug-in connector, male	4008190112615	50 pc(s).	IEC: 320 V / 17 A	Box
3.50/16/180G		header, closed side, THT			UL: 300 V / 10 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

SLD 3.50/90



Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

General ordering data


Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1633490000	PCB plug-in connector, male	4008190257941	10 pc(s).	IEC: 200 V / 10.5 A	Box
3.50/32/90		header, open side, THT			UL: 300 V / 8 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 32, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL 3.50/90



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1597350000	PCB plug-in connector, male	4008190105594	50 pc(s).	IEC: 320 V / 17 A	Box
3.50/16/90		header, open side, THT			UL: 300 V / 10 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 16, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

SLD 3.50V/90G



Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1642310000	PCB plug-in connector, male	4008190280833	10 pc(s).	IEC: 200 V / 10.5 A	Box
3.50V/32/90G		header, closed side, THT			UL: 300 V / 8 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 32, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL-SMT 3.5/180G Box




High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 3.50/16/180G 1.5SN BK BX	1753122001	PCB plug-in connector, male header, closed side, THT/ THR solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248131020	50 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box
SL-SMT 3.50/16/180G 3.2SN BK BX	1842450000	PCB plug-in connector, male header, closed side, THT/ THR solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248353804	50 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box

SL 3.50/180



Pin headers for wave soldering in 3.50 mm pitch

- **Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB**
- **Housing variant: screw flange (F)**
- **Packed in a cardboard box (BX)**
- **Pin header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL 3.50/16/180 3.2SN OR BX	1604910000	PCB plug-in connector, male header, open side, THT solder connection, 3.50 mm, No. of poles: 16, 180°	4008190034023	50 pc(s).	IEC: 320 V / 17 A UL: 300 V / 10 A	Box

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

Solder pin length (l): 3.2
mm, tinned, Orange, Box

SL-THR 3.5/135F




High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1003660000	PCB plug-in connector, male	4032248700288	24 pc(s).	IEC: 320 V / 15 A	Box
3.50/16/135F		header, Flange, THT/THR			UL: 300 V / 10 A	
3.2SN BK BX		solder connection, 3.50 mm, No. of poles: 16, 135°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

SLD 3.50/90G



Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1633720000	PCB plug-in connector, male	4008190258177	10 pc(s).	IEC: 200 V / 10.5 A	Box
3.50/32/90G		header, closed side, THT			UL: 300 V / 8 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 32, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL-SMT 3.5/90G Box



High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data


Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1841770000	PCB plug-in connector, male	4032248353125	50 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box
3.50/16/90G		header, closed side, THT/ THR solder connection,				
3.2SN BK BX		3.50 mm, No. of poles: 16, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				
SL-SMT	1761682001	PCB plug-in connector, male	4032248132270	50 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box
3.50/16/90G		header, closed side, THT/ THR solder connection,				
1.5SN BK BX		3.50 mm, No. of poles: 16, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL 3.50/180F



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1607640000	PCB plug-in connector,	4008190034535	50 pc(s).	IEC: 320 V / 17 A	Box
3.50/16/180F		male header, Flange, THT			UL: 300 V / 10 A	
3.2SN OR BX		solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

SL-SMT 3.5/90LF Box



High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1841990000	PCB plug-in connector, male	4032248353347	50 pc(s).	IEC: 320 V / 15 A	Box
3.50/16/90LF		header, Solder flange, THT/			UL: 300 V / 10 A	
3.2SN BK BX		THR solder connection, 3.50 mm, No. of poles: 16, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				
SL-SMT	1805080000	PCB plug-in connector, male	4032248268986	50 pc(s).	IEC: 320 V / 15 A	Box
3.50/16/90LF		header, Solder flange, THT/			UL: 300 V / 10 A	
1.5SN BK BX		THR solder connection, 3.50 mm, No. of poles: 16,				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

90°, Solder pin length (l):
1.5 mm, tinned, Black, Box

SL-SMT 3.5/90F Box



High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1842220000	PCB plug-in connector, male	4032248353576	50 pc(s).	IEC: 320 V / 15 A	Box
3.50/16/90F		header, Flange, THT/THR			UL: 300 V / 10 A	
3.2SN BK BX		solder connection, 3.50 mm, No. of poles: 16, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL-SMT 3.5/180F Box




High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1842910000	PCB plug-in connector, male	4032248354375	50 pc(s).	IEC: 320 V / 15 A	Box
3.50/16/180F		header, Flange, THT/THR			UL: 300 V / 10 A	
3.2SN BK BX		solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

SLD 3.50/90F



Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

General ordering data


Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1633950000	PCB plug-in connector, male	4008190258405	10 pc(s).	IEC: 200 V / 10.5 A	Box
3.50/32/90F		header, Flange, THT solder connection, 3.50 mm, No. of poles: 32, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box			UL: 300 V / 8 A	
3.2SN OR BX						

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SLD 3.50V/180F



Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD 3.50 V/32/180F 3.2 SN OR BX	1641310000	PCB plug-in connector, male header, Flange, THT solder connection, 3.50 mm, No. of poles: 32, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190279714	10 pc(s).	IEC: 200 V / 10.5 A UL: 300 V / 8 A	Box

SLD 3.50V/90F



Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD 3.50 V/32/90F 3.2 SN OR BX	1642440000	PCB plug-in connector, male header, Flange, THT solder connection, 3.50 mm, No. of poles: 32, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190280963	10 pc(s).	IEC: 200 V / 10.5 A UL: 300 V / 8 A	Box

OMNIMATE Signal - series BL/SL 3.50

BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)

SL-SMT 3.5/180LF Box




High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1804840000	PCB plug-in connector, male	4032248268610	50 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box
3.50/16/180LF		header, Solder flange, THT/ THR solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box				
SL-SMT	1842680000	PCB plug-in connector, male	4032248354047	50 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box
3.50/16/180LF		header, Solder flange, THT/ THR solder connection, 3.50 mm, No. of poles: 16, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

SL 3.50/135F



Pin headers for wave soldering in 3.50 mm pitch

- **Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB**
- **Housing variant: screw flange (F)**
- **Packed in a cardboard box (BX)**
- **Pin header can be coded**

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1643470000	PCB plug-in connector,	4008190282233	24 pc(s).	IEC: 320 V / 15 A UL: 300 V / 10 A	Box
3.50/16/135F		male header, Flange, THT solder connection, 3.50 mm, No. of poles: 16, 135°,				
3.2SN OR BX						


OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

Solder pin length (l): 3.2
mm, tinned, Orange, Box

SL 3.50/90F



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1607180000	PCB plug-in connector, male	4008190004446	50 pc(s).	IEC: 320 V / 17 A	Box
3.50/16/90F		header, Flange, THT solder connection, 3.50 mm, No.			UL: 300 V / 10 A	
3.2SN OR BX		of poles: 16, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/16/270F SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Coding elements



**Only connects what is supposed to be connected:
the right connection at the right place.**

Coding elements and locking devices clearly assign connecting elements during the manufacturing process and operation

The coding elements and locking devices are inserted prior to assembly or during the cable assembly phase. The Weidmüller alternative: configure online using the variant configurator to precode prior to delivery.

Incorrect assembly on the circuit board and incorrect plugging of connecting elements is no longer possible. The advantage: no troubleshooting during manufacture and no operational errors by the user.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
BL SL 3.5 KO SW	1610100000	PCB plug-in connector, Accessories, Coding element, Black, No. of poles: 1	4008190187637	100 pc(s).	
BL SL 3.5 KO OR	1693430000	PCB plug-in connector, Accessories, Coding element, Orange, No. of poles: 1	4008190867447	100 pc(s).	

Addresses worldwide

Let's connect.

AE	United Arab Emirates Weidmüller Middle East FZE Warehouse Q3-79 SAIF-Zone P.O. BOX 8591 Sharjah Telephone number +971 65572723 Fax number +971 65572724 wme.info@weidmuller.com	BH	Bahrain Khayber Trading Company P.O. Box 1976 Manama Telephone number +973 720747 Fax number +973 720331 khayber@batelco.com.bh	CO	Colombia Automatización Avanzada S. A. Carrera 97 No., 24 c - 23 Bodega 4 110911 Bogotá-D.C. Telephone number +57 (1) 547-8510 Fax number +57 (1) 422-3044 comercial@automatizacionavanzada.com www.automatizacionavanzada.com	ES	Spain Weidmüller, S. A. Narcis Monturiol 11-13, Pol. Ind. Sudoeste 8960 Sant Just Desvern - Barcelona Telephone number +34 934 803 386 Fax number +34 933 718 055 weidmuller@weidmuller.es www.weidmuller.es	HU	Hungary Weidmüller Kereskedelmi Kft. Budapest Gubacsi út 6. 1097 Telephone number +36 1 382 7700 Fax number +36 1 382 7701 info@weidmuller.hu www.weidmuller.hu
AO	Angola Please contact Phambili Interface South Africa	BR	Brazil Weidmüller Conexel do Brasil Conexões Elétricas Ltda. Av. Presidente Juscelino, 642 - Piraporinha Diadema, São Paulo 09950-370 Telephone number +55 (11) 4366-9600 Fax number +55 (11) 4362-1677 vendas@weidmuller.com.br www.weidmuller.com.br	CR	Costa Rica ELVATRON S. A. la Uruca 400 Norte Banco Costa Rica San Jose Costa Rica Telephone number +506 2961-060 Fax number +506 5200-609 dirk.haase@elvatron.com www.elvatron.com	FI	Finland Weidmüller Suomi, Weidmüller Aktiebolagetin siviliike Koy Plaza Vivace Äyritie 8C FI 1510 Vantaa Telephone number +358 20 7351300 Fax number +358 800 114 667 asiakaspalvelu@weidmuller.fi www.weidmuller.fi	ID	Indonesia PT. Nego Electrindo Ruko Mega Grosir Cempaka Mas Blok I No. 20 - 22 Jakarta 10640 Telephone number +62 21 42882255 Fax number +62 21 42882266 sales@negoelectrindo.co.id
AR	Argentina CPI SA Bauness 2660 C1431DOF Buenos Aires Telephone number +54 11 4523 8008 Fax number +54 11 4522 0546 info@cpi.com.ar www.cpi.com.ar	BW	Botswana Please contact Phambili Interface South Africa	CZ	Czech Republic Weidmüller s.r.o. Lomnického 5/1705 140 00 Praha 4 Telephone number +420 244 001 400 Fax number +420 244 001 499 office@weidmuller.cz www.weidmuller.cz	FR	France Weidmüller E. U. R. L. 12, Chaussée Jules César BP 263 Osny 95523 Cergy-Pontoise Cedex Telephone number +33 1 34 24 55 00 Fax number +33 1 34 24 55 01 mail@weidmuller.fr	IE	Ireland Please contact Weidmüller Ltd. Great Britain
AT	Austria Weidmüller GmbH IZ NOE Süd Straße 2b, Obj M 59 2355 Wiener Neudorf Telephone number +43 2236 67080 Fax number +43 2236 6708-899 office.at@weidmuller.com www.weidmuller.com	BY	Belarus TECHNIKON Ltd. Nezavisimosti pr. 177-9 220125 Minsk Telephone number +375 17 393-11-77 Fax number +375 17 3930080 wm@technikon.by	DE	Germany Weidmüller GmbH & Co. KG Ohmstraße 9 32758 Detmold Postfach 30 54 32720 Detmold Telephone number +49 5231 1428-0 Fax number +49 5231 14-292083 weidmuller@weidmuller.de www.weidmuller.de	GB	Great Britain Weidmüller Ltd. Klippon House Centurion Court Office Park, Meridian East, Meridian Business Park Leicester LE19 1TP Telephone number +44 116 282 3470 Fax number +44 116 289 3582 marketing@weidmuller.co.uk www.weidmuller.co.uk	IL	Israel A. U. Shay Ltd. 23/25, Embar Street 49222 Petach-Tikva P.O. Box 1 00 49 49222 Petach-Tikva Telephone number +972 3-923-3601 Fax number +972 3-923-4601 shay@uriel-shay.com www.uriel-shay.com
AU	Australia Weidmüller Pty. Ltd. PO BOX 6944 Huntingwood 2148 Huntingwood Drive 43 Huntingwood NSW 2148 Telephone number +61 2 9671 9999 Fax number +61 2 9671 9911 info@weidmuller.com.au www.weidmuller.com.au	CA	Canada W Interconnections Canada Inc. 10 Spy Court Markham Ontario L3R 5H6 Telephone number +1 (905) 475-1507 Ext. 9836 Fax number +1 (905) 475-2798 support@weidmuller.ca www.weidmuller.ca	DK	Denmark Weidmüller Danmark Vallensbækvej 18A 2605 Brøndby Telephone number +45 27747800 kundenservice@weidmuller.dk www.weidmuller.dk	GE	Georgia Please contact our Representative Office Weidmüller Interface Azerbaijan.	IN	India Representative Office Weidmüller Electronics India Pvt. Ltd. 12th Lane North Avenue, Opp Joggers Park, Kalyani Nagar, Pune 411 006 Telephone number +91 20-41290090 wmi@weidmuller.in www.weidmuller.com
AZ	Azerbaijan Representative Office Weidmüller Interface Demirchi Tower, 4th floor 37, Khojali ave. AZ 1025 Baku Telephone number +994 12 488 80 36 Fax number +994 12 488 80 37 rashad.mahmudov@weidmuller.com	CG	Congo Please contact Phambili Interface South Africa	DZ	Algeria SARL INTER ELECTRIC 1a Angles des Rues Okba Ibn Nafaa et Hassi Beida 2300 Annaba Telephone number Fax number contact@inter-electric.com	GH	Ghana Please contact our Representative Office Weidmüller Interface GmbH & Co. KG South Africa.	IS	Iceland Samey Automation Center Lyngas 13 210 Garoabær Telephone number +354 510 5200 Fax number +354 510 5201 Samey@samey.is www.samey.is
BA	Bosnia and Herzegovina Please contact our Representative Office Weidmüller Interface GmbH & Co. KG Serbia or BIG electric d.o.o Mladena Stojanovića 117A 78000 Banja Luka Telephone number +387 51926277 Fax number +387 51926277 bigelectric@blic.net www.bigelectric.ba	CH	Switzerland Weidmüller Schweiz AG Rundbuckstraße 2 8212 Neuhausen am Rheinfall SH Telephone number +41 52 674 07 07 Fax number +41 52 674 07 08 info@weidmuller.ch www.weidmuller.ch	EC	Ecuador Elsystec S. A., Electricidad Sistemas y Tecnología Vasco de Contreras N35-251 y Mañosa Quito - Pichincha Telephone number +593 22456510 Fax number +593 22456755 Elsystec@uio.satnet.net	GR	Greece G.A. Solutions Ippokratous 11 Metamorfosi 144 52 Athen Telephone number +30 210 2823233 Fax number +30 210 2823233 info@weidmuller.gr www.weidmuller.gr	IT	Italy Weidmüller S. r.l. Via Albert Einstein 4 20092 Cinisello Balsamo Milano Telephone number +39 02 660681 Fax number +39 02 6124945 weidmuller@weidmuller.it www.weidmuller.it
BE	Belgium Weidmüller Benelux B. V. Mechelsesteenweg 519 bus 6 en 7 1930 Nossegem Telephone number +32 2 752 40 70 Fax number +32 2 751 36 06 info@weidmuller.be www.weidmuller.be	CL	Chile ATS- INTECH Maria Luisa Santander 0475 Santiago Providencia 7500859 Telephone number +56 2 341 1271 Fax number +56 2 341 1275 felipe@atsintech.com www.atsintech.com CPI CHILE LTDA Av. Presidente Frei Montalva 6001, 47 complejo el cortijo Santiago - Conchalí Telephone number +562 963 8440 Fax number +562 963 8440 cpi@cpichile.cl www.cpichile.cl	EE	Estonia Please contact our Representative Office Weidmüller Interface GmbH & Co. KG Latvia or Soots Interface OÜ Pärnu mnt 142 11317 Tallinn Telephone number +372 609 6933 Fax number info@sootsinterface.ee www.sootsinterface.ee	GT	Guatemala Prestelectro, Prestegard Electro, S.A. Avenida Petapa 44-22, Zona 12 Guatemala City Telephone number +502 2442-3346 Fax number +502 2476-8945 ventas@prestelectro.com	JM	Jamaica Please contact W Interconnections Inc. United States
BG	Bulgaria Weid-Bul EOOD Bul. "Kliment Ohridski" 13 1756 Sofia Telephone number +359 2 963 2560 Fax number +359 2 963 1098 sofia@weidbul.com www.weidbul.com	CN	China Weidmüller Interface (Shanghai) Co. Ltd. 100 Yutong Road 25 F, BM Intercontinental Business Center 200070 Shanghai Telephone number +86 21-22195008 Fax number +86 21-22195009 customer.hotline@weidmuller.com.cn www.weidmuller.com.cn	EG	Egypt Standard Electric (OMEGA) 1, Abdelhamid Badawy Street Heliopolis Cairo Telephone number +202 21805600 stdelec@rite.com	HK	Hong Kong Weidmüller (Hong Kong) Limited Co. Ltd. Unit 1617, Metropolis Tower No. 10 Metropolis Drive, Hunghom, Kowloon Telephone number +852 3154 8088 Fax number +852 31548099 Info-hk@weidmuller.com.hk	JO	Jordan Trans Jordan for Electro PO Box 33 06 07 Amman Telephone number +962 6 533 2020 Fax number +962 6 533 5800 transjordan@batelco.jo
						HR	Croatia ElektroPARTNER d.o.o. Slavonska avenija 24/6 HR-10000 Zagreb Telephone number +385 (1) 6184 793 Fax number +385 (1) 6184 795 elektropartner@zg.t-com.hr www.elektropartner.hr		



You can find all Weidmüller addresses and your local contact on the internet at: www.weidmueller.com/countries

Let's connect.

Sales company 

Representation abroad 

without representation abroad 

JP Japan Nihon Weidmüller Co. Ltd. Sphere Tower Tennoz 2-2-8 Higashi-Shinagawa, Shinagawa-ku Tokyo 140-0002 Telephone number +81 3 6711 5300 Fax number +81 3 6711 5333 weidmullerjapan@weidmueller.co.jp www.weidmueller.co.jp	MA Morocco Sofimed 137, Bd Moulay Ismail Roches Noires 20290 Casablanca Telephone number Fax number contact@sofimedmaroc.com	MY Malaysia Connect Plus Technology Sdn Bhd No. 43, Jalan PJS 11/22, Bandar Sunway 46150 Petaling Jaya Selangor Darul Ehsan Telephone number +60 3 5633 7363 Fax number +60 3 5633 6562 paul@cpctech.com.my www.cpctech.com.my	PH Philippines Enclosure Systems Specialists Inc. 2276 Don Chino Roces Avenue Extension Room 103/105 Narra Building 1231 Makati City Telephone number +63 2 813 8580 Fax number +63 2 813 8596 sales_encsys@pltdsl.net www.enclosuresystemsph.com	RS Serbia Representative Office Weidmüller Interface GmbH & Co. KG Ustanicka 189, III sprat lokal 7a 11050 Beograd Telephone number +381 112885274 Fax number +381 112885274 zoran.rabrenovic@weidmueller.com TeLa Elektrik d.o.o. Ul.Dr Drage Ljočić 6 Beograd Telephone number +381 11 2772 415 Fax number +381 11 2772 850 office@tela.rs www.tela.rs
KE Kenya Please contact our Representative Office Weidmüller Interface GmbH & Co. KG South Africa.	MD Moldova BERHORD A & D srl 79/1, str. Milescu Spartaru MD-2075 Chisinau Moldova Telephone number +373 (22) 815002 Fax number +373 (22) 815007 atuleanu@berhord.com www.ad.berhord.com	MZ Mozambique Please contact Phambili Interface South Africa	PK Pakistan Automation Controls (Pak) Apartment No. 33 C III, Chenab Block, Allama Iqbal Town Lahore Telephone number +92 42 37809948 Fax number +92 42 37809950 nadeem@acpak.com.pk www.acpak.com.pk	RU Russia Weidmüller Group 7/10 Khlebozavodskiy Passage, Moskau 115230 Telephone number +7 495 280 72 71 Fax number +7 495 280 72 71 Info@weidmueller.ru www.weidmueller.ru
KG Kyrgyzstan Please contact our Representative Office Weidmüller Interface Azerbaijan.	ME Montenegro Please contact our Representative Office Weidmüller Interface GmbH & Co. KG Serbia.	NA Namibia Please contact Phambili Interface South Africa	PL Poland Weidmüller Sp. z o. o. ul. Ogrodowa 58 00-876 Warszawa Telephone number +48 22 510 09 40 Fax number +48 22 510 09 41 biuro@weidmueller.com.pl www.weidmueller.pl	SA Saudi Arabia Al Abdulkarim Holding Co. P.O. Box 4 Dammam 31411 Telephone number +966 3 8337110 Fax number +966 3 8829547 E-mail salehsk@akh.com.sa www.weidmueller.ae Saudi Electric Supply Company (SESCO) P.O. Box 32 98 Al Khobar 31952 Telephone number +966 3 8829546 Ext. 3030 Fax number E-mail Safdar.Malik@sescogex.com www.sescogex.com
KR Korea Weidmüller Korea Co. Ltd. 9th floor 429, Teheran-ro, Gangnam-Gu Seoul 135-721 Telephone number +82 2-516-0003 Fax number +82 2-516-0090 info@weidmueller.co.kr www.weidmueller.co.kr	MG Madagascar Please contact Phambili Interface South Africa	NL Netherlands Weidmüller Benelux B. V. Franciscusweg 221 1216 SE Hilversum P.O. Box 1505 1200 BM Hilversum Telephone number +31 35 626 12 61 Fax number +31 35 623 20 44 info@weidmueller.nl www.weidmueller.nl	PR Puerto Rico Please contact W Interconnections Inc. United States	SE Sweden Weidmüller AB Axe Danielssons väg 271 BOX 31025 SE-200 49 Malmö Telephone number +46 77- 143 00 44 Fax number +46 40-37 48 60 info@weidmueller.se www.weidmueller.se
KW Kuwait Kana Controls General Trading & Contracting Co. W. L. L. Al Rai Industrial Area, Plot 28-30, St. 31 13016 Safat B.P. 25593 Telephone number +965 4741373 Fax number +965 4741537 info@kanacontrols.com	MK Macedonia Please contact our Representative Office Weidmüller Interface GmbH & Co. KG Serbia or ELEKTRO - SMK dooel UL. III Makedonska brigada b.b. 1000 Skopje Telephone number +389 22460295 Fax number Elektro-smk@telekabel.net.mk	NO Norway Sivilingeniør J.F. Knudtzen AS Billingstadsletta 97 1396 Billingstad PO Box 160 1378 Nesbru Telephone number +47 66 98 33 50 Fax number +47 66 98 09 55 firmapost@jfknuudtzen.no www.jfknuudtzen.no	PT Portugal Weidmüller Sistemas de Interface S. A. Estrada Outeiro Polima, R. Augusto Dias da Silva, Lote B - Esc. 2 São Domingos de Rana 2785-515 Abóboda Telephone number +351 214 459 191 Fax number +351 214 455 871 weidmuller@weidmueller.pt www.weidmueller.pt	SG Singapore Weidmüller Pte. Ltd. 70 Bendemeer Road # 04-03 Luzerne Building Singapore 339940 Telephone number +65 6841 5311 Fax number +65 6841 5377 info@weidmueller.com.sg www.weidmueller.com.sg
KZ Kazakhstan Please contact Weidmüller Group Russia	MN Mongolia Please contact our Representative Office Weidmüller Interface Azerbaijan.	NZ New Zealand Cuthbert S. Stewart Ltd. 27 Te Puni Street Petone PO Box 38496 Wellington Mail Centre 5054 Telephone number (04) 568 6156 Fax number (09) 489 1752 cs@cutbertstewart.co.nz	PY Paraguay Please contact CPI SA Argentina	SI Slovenia Elektrospoj d. o. o. Stegne 27 SI- 1000 Ljubljana Osrednjeslovenska Telephone number +386 1 511 3810 Fax number +386 1 511 1604 info@elektrospoj.si www.elektrospoj.si
LB Lebanon Progress Engineering & Trading Enterprises Al Nahr Street Beirut 11-1111 Telephone number +961 1 444 664 Fax number +961 1 561 880 progress@inco.com.lb	MT Malta E. S. S., Electrical Supplies & Services Ltd. San Gwakklin Road Mriehel Telephone number +356 21255777 Fax number +356 21255999 robert.agius@ess.com.mt	OM Oman DAN INTERNATIONAL LLC. Ghala St. 111 BP 2901 Seeb Telephone number +968 5036 77 Fax number +968 5037 55 yedu@danintl.com	QA Qatar Doha Motors PO Box 145 Telephone number +974 4651441 Fax number +974 4654579 dmtctech@qatar.net.qa http://www.dohamotorsgroup.com/td.html Petroleum Technology Co. W.L.L. PO Box 16069 5th Floor Toyota tower Telephone number +974 44419603 Fax number +974 44419604 petrotec@qatar.net.qa www.petrotec.com.qa	SK Slovakia ELEKTRIS s.r.o. Elektrárnská 1 831 04 Bratislava Telephone number +421 2/4920 0113 Fax number +421 2/4920 0119 bratislava@elektris.sk
LT Lithuania Please contact our Representative Office Weidmüller Interface GmbH & Co. KG Latvia or ELEKTROS IRANGA Tinklų g. 29 a LT-5319 Panevėžys Telephone number +370 (45) 582 828 Fax number info@eliranga.lt	MU Mauritius Mubelo Electrical Ltd. Office 26, Gateway building, St Jean Road Quatre Bornes Mauritius Telephone number +230 4670989 Fax number +230 4654051 richard.mubelo@orange.mu	PE Peru IMPEXINCA S.A.C. Calle Ortiz de Zevallos No. 105, Urb. San Antonio 18 Lima, Miraflores Telephone number +51 1 447 5608 info@impeixinca.pe www.impeixinca.pe J & W CIA, S. A. Calle 6 Mz. D Lte. 23, Urb. Ind. Grimanesa 01 Callao Telephone number +51 1 572 2539 Fax number +51 1 572 0152 contacto@jwcia.com www.jwcia.com	RO Romania Representative Office Weidmüller Interface GmbH & Co. KG Ionescu Crum Street, No. 1, 1st Tower, 1st Floor, Office 4 500446 Brasov - Brasov Business Park Telephone number +40 (268) 446 222 Fax number +40 (262) 205 410 claudiu.totea@weidmueller.com www.weidmueller.com	
LU Luxembourg Please contact Weidmüller Benelux B. V. Netherlands	MW Malawi Please contact our Representative Office Weidmüller Interface GmbH & Co. KG South Africa.			
LV Latvia SIA Abi4 Daugavgrivas 31b Rīga, LV-1007 Telephone number +371 674 70999 Fax number +371 676 24562 abi_4@tvnet.lv Representative Office Weidmüller Interface GmbH & Co. KG Udens str. 12-118 Rīga, LV-1007 Telephone number +371 29254766 Fax number +371 674 65637 ilgonis.rudaks@weidmueller.com www.weidmueller.com	MX Mexico W Interconnections S. A. DE C. V. Blvd. Hermanos Serdán 698, Col. San Rafael Oriente 72029 Puebla Telephone number +52 (222) 268 6227 Fax number +52 (222) 286 6242 clientes@weidmueller.com.mx			

Addresses worldwide

Let's connect.

SV El Salvador
Prestegard Electro
11 Avenida Norte No. 240
Edificio Salazar No. 2
San Salvador
Telephone number +503
2271 1690
Fax number +503 2221
3851
prestegard@navegante.com.sv

SY Syria
Please contact
Weidmüller Middle East FZE
United Arab Emirates

SZ Swaziland
Please contact
Phambili Interface
South Africa

TH Thailand
Pisanu Engineering Co. Ltd.
Kwang Dingaeng, Khet
Dingaeng
800/2 Soi Trakulsuk, Asoke-
dindaeng Road
Dindaeng, Bangkok
10400
Telephone number +66 2
248 2896
Fax number +662 105 6301
ecsales@pisanu.co.th
www.pisanu.co.th

Representative Office
Weidmüller Pte. Ltd.
37/F, Sathorn Square Building
98 North Sathorn Road
Bangkok, Silom Bangrak
10500
Telephone number +66 2
105 6300
Fax number +66 2 642 9220
info@weidmuller.com.sg

TJ Tajikistan
Please contact
our Representative Office
Weidmüller Interface
Azerbaijan.

TM Turkmenistan
Please contact
our Representative Office
Weidmüller Interface
Azerbaijan.

TN Tunisia
Please contact
Weidmüller E. U. R. L.
France

TR Turkey
Weidmüller Elektronik Ticaret
Ltd. Sirketi
Kavacak Mah. Orhan Veli Kanik
Caddesi 9/1
34810 Beykoz / Istanbul
Telephone number +90 (216)
537 10 70
Fax number +90 (216) 537
10 77
info@weidmuller.com.tr
www.weidmuller.com.tr

TW Taiwan
Weidmüller (Hong Kong)
Limited
No. 3, Lane 89, ChungYang
N. Rd
24148 SanChuang City,
Taipei
Telephone number +886 921
949 751
roy.lin@weidmueller.com.hk

TZ Tanzania
Please contact
our Representative Office
Weidmüller Interface GmbH
& Co. KG
South Africa.

UA Ukraine
LLC WM UKRAINE
Levanevskogo str. 6
Kiev
3058
Telephone number +38 044
490 32 48
Fax number
info@wm-ua.com.ua
wm-ua.com.ua/

Representative Office
Weidmüller Interface GmbH
& Co. KG
Z, office 303
7-D, Zdolbunivska str.
Kiev, 2081
Telephone number
(mobile) +38 050 440 25 24
info.ua@weidmueller.com

US United States
W Interconnections Inc.
821 Southlake Boulevard
Richmond Virginia 23236
Telephone number +1 (804)
794-2877
Fax number +1 (804) 379-
2593
info@weidmuller.com
www.weidmuller.com

UY Uruguay
REWO Uruguay S. A.
AV. Bolivia 2001Esq
Rocafuerte
11300 Carrasco Montevideo
Telephone number +598
2604 8439
Fax number +598 2604
8439
rewo@rewoouruguay.com.uy

UZ Republic of Uzbekistan
Please contact
our Representative Office
Weidmüller Interface
Azerbaijan.

VE Venezuela
Somerinca C. A.
Corazon de Jesus - 3ra
Transversal con calle el
Carmen- Los Dos Caminos
Caracas 1070-A
Telephone number +58
2 122352748
Fax number +58
2122399341
klocmoeller@cantv.net
www.somerinca.com

VN Vietnam
AUMI Industrial Equipment &
Automation Company Limited
E1, La Thanh Hotel
218 Doi Can Street
Lieu Giai Ward, Ba Dinh
District
Hanoi City
Telephone number +84 4
37628601
Fax number +84 4
62661391
aumi@aumi.com.vn
www.aumi.com.vn

Representative Office
Weidmüller Pte. Ltd.
Level 16 Saigon Tower
Building
29 Le Duan Street
District 1
Ho Chi Minh
Telephone number +848
3520 7717
Fax number +848 3520
7604
info@weidmuller.com.sg

ZA South Africa
Phambili Interface
PO Box 193
1609 Johannesburg, Edenvale
5 Bundo Road, Sebenza
1610 Johannesburg
Telephone number +27 (11)
4521930
Fax number
info@weidmuller.co.za
www.weidmuller.co.za

Representative Office
Weidmüller Interface GmbH
& Co. KG
210 Amarand
Avenue, Pegasus Building
181 Pretoria, waterkloof Glen
ext 2 -
Telephone number +27 12
003 2906
Fax number +27 (11)
4526455
Jacques.Vosloo@weidmueller.
com
www.weidmueller.com

ZM Zambia
Please contact
Phambili Interface
South Africa

ZW Zimbabwe
Please contact
Phambili Interface
South Africa

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [weidmuller](#) manufacturer:

Other Similar products are found below :

- [8924550000](#) [56956](#) [0133660000](#) [6720000227](#) [6720005111](#) [68676](#) [69718](#) [EXO24CH](#) [7940000218](#) [8005181001](#) [8008180000](#) [8432240000](#)
- [8463580000](#) [8545830000](#) [8689870000](#) [8705640000](#) [8869870000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#)
- [9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#) [9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [9159530000](#) [919656](#) [919764](#)
- [9202230000](#) [9202850000](#) [9204260000](#) [9456750000](#) [9457913000](#) [980811](#) [980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#)
- [9919371205](#) [9919371224](#) [9925710000](#) [9926252005](#) [9927480024](#)