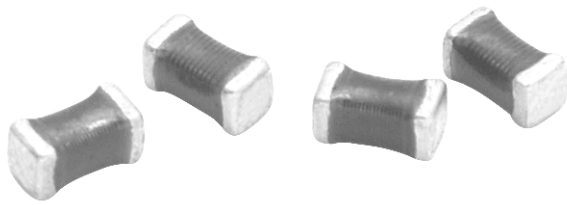


High Frequency, Surface Mount, Laser Spiral Coated Inductors



ELECTRICAL SPECIFICATIONS

Inductance Range: 1.0 nH to 220 nH

Inductance Tolerance: ± 0.3 nH for 1.0 - 3.3 nH
 $\pm 5\%$ for 3.9 nH to 220 nH

Operating Temperature: - 40 °C to + 100 °C Core

Material: Ceramic

FEATURES

- Very small in size
- High self-resonant frequency values
- High Q values relative to size at higher frequencies
- Coated coil provides protection and moisture resistance
- Compatible with vapor phase and infrared reflow soldering
- Tape and reel packaging for automatic handling, 3000/reel, EIA-481
- L and Q value not affected by mounting orientation
- 100 % lead (Pb)-free and RoHS compliant



RoHS
COMPLIANT

TEST EQUIPMENT

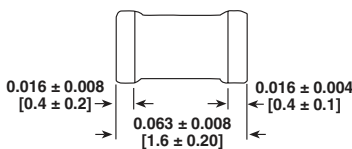

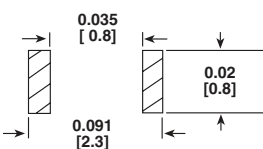
- Inductance and Q measured on HP4291B
- SRF measured on HP8753E
- DCR measured on HP4338B

STANDARD ELECTRICAL SPECIFICATIONS

INDUCTANCE (nH)	TOLERANCE	TEST FREQ. L (MHz)	Q MINIMUM	TEST FREQ. Q (MHz)	SELF-RESONANT FREQ. MIN. (MHz)	DCR MAXIMUM (Ohms)	RATED DC CURRENT * (mA)
1.0	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.06	500
1.2	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.06	500
1.5	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.07	500
1.8	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.08	500
2.2	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.09	500
2.7	± 0.3 nH, 0.2 nH	100	30	1000	6000	0.10	500
3.3	± 0.3 nH, 0.2 nH	100	30	1000	5500	0.12	500
3.9	$\pm 5\%$	100	30	1000	5500	0.15	450
4.7	$\pm 5\%$	100	30	1000	4800	0.17	450
5.6	$\pm 5\%$	100	30	1000	4600	0.18	430
6.8	$\pm 5\%$	100	30	1000	3550	0.20	430
8.2	$\pm 5\%$	100	30	1000	3500	0.28	400
10	$\pm 5\%$, 2 %	100	30	500	2800	0.32	400
12	$\pm 5\%$, 2 %	100	30	500	2800	0.35	400
15	$\pm 5\%$, 2 %	100	30	500	2500	0.41	350
18	$\pm 5\%$, 2 %	100	30	500	2300	0.45	350
22	$\pm 5\%$, 2 %	100	30	500	2000	0.50	300
27	$\pm 5\%$, 2 %	100	30	500	2000	0.55	300
33	$\pm 5\%$, 2 %	100	30	500	1800	0.60	300
39	$\pm 5\%$, 2 %	100	30	500	1800	0.80	300
47	$\pm 5\%$, 2 %	100	30	500	1800	0.95	250
56	$\pm 5\%$, 2 %	100	30	500	1800	1.20	250
68	$\pm 5\%$, 2 %	100	30	500	1500	1.30	250
82	$\pm 5\%$, 2 %	100	30	500	1500	1.50	250
100	$\pm 5\%$, 2 %	100	26	500	1300	1.80	200
120	$\pm 5\%$, 2 %	100	26	500	1200	3.00	130
150	$\pm 5\%$, 2 %	100	26	500	1100	4.50	100
180	$\pm 5\%$, 2 %	100	20	500	1000	6.5	80
220	$\pm 5\%$, 2 %	100	20	500	900	7.5	70

*Value obtained when current flows and the temperature has risen 15 °C

DIMENSIONS in inches [millimeters]

 <p>0.016 \pm 0.008 [0.4 \pm 0.2]</p> <p>0.016 \pm 0.004 [0.4 \pm 0.1]</p> <p>0.063 \pm 0.008 [1.6 \pm 0.20]</p>	 <p>0.031 \pm 0.008 [0.8 \pm 0.20]</p> <p>0.031 \pm 0.006 [0.8 \pm 0.15]</p>	<p>Recommended Pad Layout</p>  <p>0.035 [0.8]</p> <p>0.02 [0.8]</p> <p>0.091 [2.3]</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

DESCRIPTION

IMC-0603	10 nH	$\pm 5\%$	ER	e4
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

GLOBAL PART NUMBER												
I	M	C	0	6	0	3	E	R	1	0	N	J
PRODUCT FAMILY			SIZE				PACKAGE CODE		INDUCTANCE VALUE			TOL.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)
[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)
[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)