

CURRENT REGULATIVE LED


CRLED

- CRLED is LED which supplies constant current to keep LED Intensity Consistency even when power supply voltage fluctuations or load impedance fluctuations occur.
- CRLED is used with current stabilization and current limiting

■Features

- High Luminous LEDs / 8mm Round Standard Directivity
- Superior Weather-resistance / UV Resistant Epoxy
- Water Clear Type

■Outline Dimension

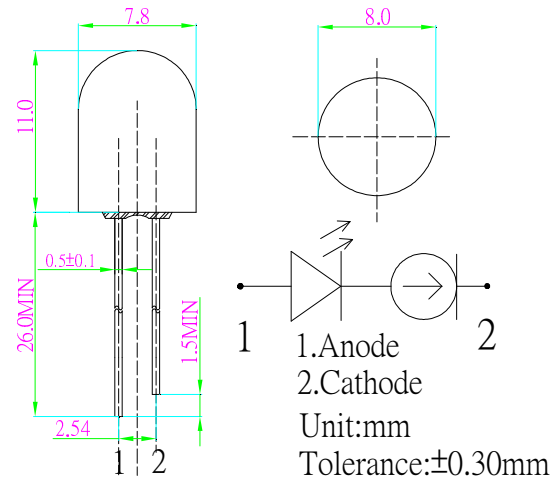


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Voltage	V _F	20	V
Power Dissipation	P _D	350	mW
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T _{sol}	260°C/5sec	-

■Directivity

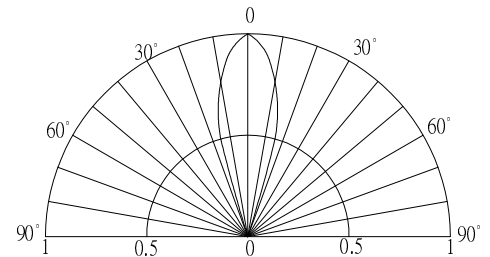

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color	V _F (V)		I _F (mA)			I _R (μA)	I _v (mcd)*			λD(nm)*			2θ1/2(deg)
		Min	Max	Min	Typ.	Max.	Max..	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
		V _F =12V		V _F =12V			V _R =8V	V _F =12V			V _F =12V			
OSW5DK8B31B-CRLED16	White	5.5	20	-	16	-	10	-	10000	-	X=0.27, Y=0.28			30
OSM5DK8B31B- CRLED16	Warm White	5.5	20	-	16	-	10	-	7000	-	X=0.45, Y=0.41			30
OSB5SA8B31B -CRLED16	Blue	5.5	20	-	16	-	10	-	5800	-	465	470	475	30
OSG5DA8B31B -CRLED16	Pure Green	5.5	20	-	16	-	10	-	10000	-	520	525	530	30
OSY5PA8B31B - CRLED16	Yellow	5	20	-	16	-	10	-	7000	-	585	590	595	30
OSO5PA8B31B - CRLED16	Orange	5	20	-	16	-	10	-	7000	-	600	605	610	30
OSR5PA8B31B - CRLED16	Red	5	20	-	16	-	10	-	7000	-	620	625	630	30

*1 Tolerance of measurements of chromaticity coordinate is ±10%


*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

■Applications


- Electronic Signs And Signals/ Small Area Illuminations
- Back Lighting/ Toys/ Other Lighting




Explanation of terms
I_P Pinch-off current at 12v
V_K Voltage which produces 0.8I_P or greater current
V_R Breakdown voltage

■ Typical Applications

1 : Single LED



2 : Multi- LEDs in series

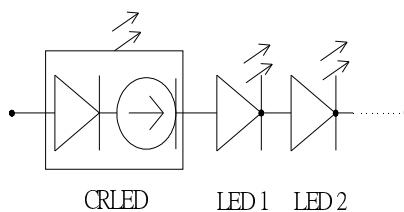

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard LEDs - Through Hole](#) ***category:***

Click to view products by [Optosupply](#) ***manufacturer:***

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LTL-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [G22041431007J2C000](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2](#) [L53GC13](#) [264-7SURTS530-A3](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#) [LNX998CKBDA](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342DUT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#) [SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [SNW-LX504SRC/4](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#) [SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC/F](#) [SSL-LX5093SYT](#) [SSL-LX5099SRSGC-CA](#) [SSL-LX509E3SIT](#) [SSL-LX509FT3ID](#)