

**M12-Round-Plug Connector, Single-Ended Cordsets,
According to IEC 61076-2-101**


RST



3-, 4-, 5-, and 8-Poles

Actuator/sensor cordset, single-ended, M12, 3-, 4-, 5-, and 8-poles, male straight connector with self-locking thread and molded cable.

RST

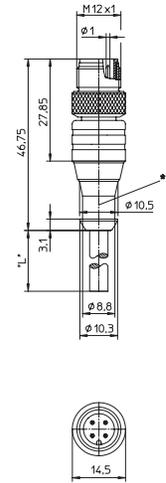


*a hose mounting


Pin Assignments

M12 - Male


3 poles




4 poles



5 poles



8 poles





Be Certain with Belden

M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101 RST

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body TPU
Insert TPU
Contact CuSn, pre-nickel and 0.3 microns gold-plated
Coupling nut CuZn, nickel-plated

Electrical

Contact resistance ≤ 5 mΩ
Nominal current at 40°C 3–5 poles 4 A
8 poles 2 A
Nominal voltage 3–4 poles 240 V
5 poles 60 V
8 poles 30 V
Rated voltage 3–4 poles 250 V
5 poles 63 V
8 poles 36 V
Test voltage 3–4 poles 2.0 kV eff. / 60 s
5–8 poles 1.5 kV eff. / 60 s
Insulation resistance > 10⁹ Ω
Pollution degree 3

Cable Specifications

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
06	PVC	3 x 0.34 mm ²	Orange	.197" (5.0 mm)
07	PVC	4 x 0.75 mm ²	Orange	.197" (5.0 mm)
56	PVC	5 x 0.34 mm ²	Orange	.224" (5.7 mm)
224	PUR, halogen-free	3 x 0.34 mm ²	Black	.169" (4.3 mm)
225	PUR, halogen-free	4 x 0.34 mm ²	Black	.185" (4.7 mm)
228	PUR, halogen-free	5 x 0.50 mm ²	Black	.213" (5.4 mm)
251	PUR, halogen-free welding spark proof	4 x 0.34 mm ²	Orange	.185" (4.7 mm)
259	PUR, halogen-free welding spark proof	5 x 0.50 mm ²	Orange	.217" (5.5 mm)
260	PUR, halogen-free welding spark proof	3 x 0.34 mm ²	Orange	.177" (4.5 mm)
282	PUR, halogen-free	7 x 0.25 mm ²	Black	.236" (6.0 mm)

Cordsets
Single-Ended

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3-06/...M	3	PVC	2 M / 5 M / 10 M	
RST 3-224/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RST 3-260/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RST 4-07/...M	4	PVC	2 M / 5 M / 10 M	
RST 4-225/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RST 4-251/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RST 5-56/...M	5	PVC	2 M / 5 M / 10 M	
RST 5-228/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RST 5-259/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RST 8-282/...M	8	PUR, halogen-free	2 M / 5 M / 10 M	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Micro-D Connectors](#) category:

Click to view products by [Belden](#) manufacturer:

Other Similar products are found below :

[M243082311F](#) [M2430834F](#) [M24308/4-6F](#) [65-1920-15](#) [M83513/01-HN](#) [M83513/03-A10N](#) [M83513/03-B14C](#) [M83513/03-D09C](#) [M83513/03-D11N](#) [M83513/03-G02N](#) [M83513/03-G05N](#) [M83513/03-G08C](#) [M83513/03-G09N](#) [M83513/03-G12N](#) [M83513/03-H13N](#) [M83513/04-E15N](#) [M83513/04-G04C](#) [M83513/10-E01NP](#) [M83513/13-B01NP](#) [M83513/13-C01NN](#) [M83513/16-A01CP](#) [M83513/22-D01NP](#) [M83513/25-B01NP](#) [6R2004A30F015](#) [6R4006A28A120](#) [703006A13F060](#) [704002A03F200](#) [705001A13F120](#) [7-1532020-5](#) [748567-1-P](#) [MDB1-31SH003](#) [MDM-15PBS-L58](#) [MDM-15PCBRM7T](#) [MDM-15PH003B-A174](#) [75-068624-59S](#) [MDM-15PH034B](#) [MDM-15SH001L](#) [MDM-15SH004B](#) [MDM-21PH003K](#) [MDM-25PH003B-A174](#) [MDM-25PHW01F-A174](#) [MDM-37PH006L-A174](#) [MDM-37PH048M5-A174](#) [MDM-37SCBRP-A174](#) [MDM-51PBS-L56](#) [MDM-51PSF](#) [MDM-51SH003M7](#) [MDM-51SSM7-A174](#) [MDM-9PBSP-L58](#) [MDM-9PH003M7](#)