



ISSUE 7; October 2012 - RoHS 2011/65/EU

Description

- Standard 3.2 x 2.5mm SMD crystal
- Ceramic package with a seam sealed metal lid, hermetically sealed.

Frequency Range

- | | |
|---------------------|------------------|
| Frequency | 12.0 to 67.0MHz |
| Frequency Stability | ±10.00ppm |
| Frequency Tolerance | ±10ppm to ±50ppm |

General Specification

- | | |
|------------------------|----------------------------|
| Load Capacitance (CL) | 10.0pF to 75.0pF or Series |
| Drive Level | 100µW max |
| Ageing | ±5ppm max per year @ 25°C |
| Shunt Capacitance (C0) | 7pF max |

Operating Temperature Ranges

- 10 to 60°C
- 20 to 70°C
- 40 to 60°C
- 40 to 85°C

Environmental Parameters

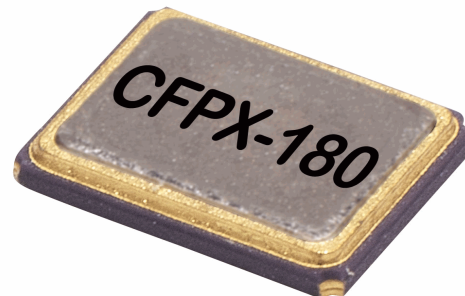


- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-202F, Method 213B: 1000G, 0.5ms, 1/2 sine wave
- Vibration: MIL-STD-202F, Method 204D, Test Condition D: 20G (10Hz-2000Hz), 4hrs in 3 mutually perpendicular planes (total 12hrs)

Ordering Information


- Frequency*
- Model*
- Frequency Tolerance (@25°C)*
- Frequency Stability (over operating temperature range)*
- Operating Temperature Range*
- Load Capacitance*
- Overtone
- Example
- 20.0MHz CFPX-180
- 50/50/-40 to 85C/16 FUND

Packing Details

- Pack Style: **Bulk** Loose in bulk pack
- Pack Size 100
- Pack Style: **Reel** Tape and reel in accordance with EIA-481-D
- Pack Size 1,000
- Alternative packing options available

**Outline (mm)**

Pad Connections
1. Crystal
2. GND
3. Crystal
4. GND

Solder Pad Layout**Sales Office Contact Details:**

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

**Electrical Specification - maximum limiting values**

Frequency Range	Frequency Tolerance	Stability		Temperature Range	ESR Max	Vibration Mode
		Min	Max			
12.0 to <13.0MHz	±10ppm to ±50ppm	±10ppm ±15ppm ±20ppm	±50ppm	-10 to 60°C -20 to 70°C -40 to 85°C	250Ω	Fundamental
13.0 to <16.0MHz	±10ppm to ±50ppm	±10ppm ±15ppm ±20ppm	±50ppm	-10 to 60°C -20 to 70°C -40 to 85°C	150Ω	Fundamental
16.0 to <30.0MHz	±10ppm to ±50ppm	±10ppm ±15ppm ±20ppm	±50ppm	-10 to 60°C -20 to 70°C -40 to 85°C	100Ω	Fundamental
30.0 to <67.0MHz	±10ppm to ±50ppm	±10ppm ±15ppm ±20ppm	±50ppm	-10 to 60°C -20 to 70°C -40 to 85°C	60Ω	Fundamental

This document was correct at the time of printing; please contact your local sales office for the latest version

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [IQD](#) manufacturer:

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)