


Microwave MLC's

AVX RF

CDR Series – MIL-PRF-55681 (RF/Microwave Chips)

MILITARY DESIGNATION PER MIL-PRF-55681

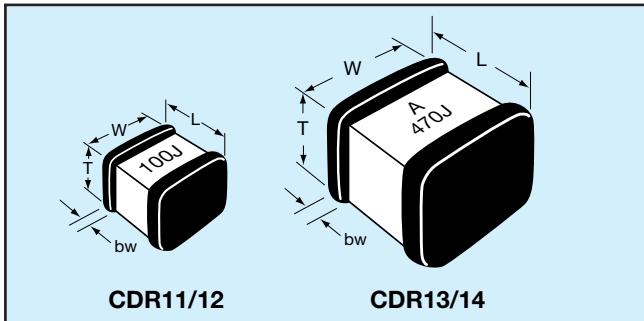

CROSS REFERENCE: AVX/MIL-PRF-55681

Per MIL-C-55681	AVX Style	Length (L)	Width (W)	Thickness (T)		Termination Band (bw)	
				Max	Min	Max	Min
CDR11	AQ11	.055±.015 (1.40±.381)	.055±.015 (1.40±.381)	.057 (1.45)	.020 (.508)	.020 (.508)	.005 (.127)
CDR12	AQ12	.055±.025 (1.40±.635)	.055±.015 (1.40±.381)	.057 (1.45)	.020 (.508)	.020 (.508)	.005 (.127)
CDR13	AQ13	.110±.020 (2.79±.508)	.110±.020 (2.79±.508)	.102 (2.59)	.030 (.762)	.025 (.635)	.005 (.127)
CDR14	AQ14	.110 +.035 -0.020 (2.79 +.889 -.508)	.110±.020 (2.79±.508)	.102 (2.59)	.030 (.762)	.025 (.635)	.005 (.127)

HOW TO ORDER

CDR12	BG	101	A	K	U	S
MIL Style CDR11, CDR12, CDR13, CDR14	Capacitance EIA Capacitance Code in pF. First two digits = significant figures or "R" for decimal place. Third digit = number of zeros or after "R" significant figures.			Capacitance Tolerance Code B = ±.1 pF C = ±.25 pF D = ±.5 pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20%	Termination Finish (Military Designations) Code M = Palladium silver N = Silver-nickel-gold S = Solder coated final with a minimum of 4 percent lead T = Silver U = Base metallization-barrier metal-solder coated (tin/lead alloy, with a minimum of 4 percent lead) W = Base metallization-barrier metal-tinned (tin or tin/lead alloy) Y = Base metallization-barrier metal-tin (100 per- cent) Z = Base metallization-barrier metal-tinned (tin/lead alloy, with a minimum of 4 percent lead)	Failure Rate Level M = 1.0% P = .1% R = .01% S = .001%
Voltage Temperature Limits BG = +90±20 ppm/°C with and without rated voltage from -55°C to +125°C BP = 0±30ppm/°C with and without rated voltage from -55°C to +125°C			Rated Voltage Code A = 50V B = 100V C = 200V D = 300V E = 500V			

PACKAGING

Standard Packaging Quantity

CDR11-12 = 100 pcs per waffle pack

CDR13-14 = 80 pcs per waffle pack

*See MIL-PRF-55681 Specification for more details

TAPE & REEL: All tape and reel specifications are in compliance with EIA RS481
(equivalent to IEC 286 part 3).

Not RoHS Compliant



For RoHS compliant products,
please select correct termination style.

Sizes SQCA through SQCB, CDR11/12 through 13/14.

-8mm carrier

-7" reel: ≤0.040" thickness = 2000 pcs

≤0.075" thickness = 2000 pcs

-13" reel: ≤0.075" thickness = 10,000 pcs

Microwave MLC's



CDR Series – MIL-PRF-55681 (RF/Microwave Chips)

TABLE I: STYLES CDR11 AND CDR12 CAPACITOR CHARACTERISTICS

Type Designation 1/	Capacitance in pF	Capacitance tolerance	Rated temperature and V/Temperature	WVDC
CDR1 -B-0R1AB--	0.1	B	BG, BP	50
CDR1 -B-0R2AB--	0.2	B	BG, BP	50
CDR1 -B-0R3A--	0.3	B, C	BG, BP	50
CDR1 -B-0R4A--	0.4	B, C	BG, BP	50
CDR1 -B-0R5A--	0.5	B, C, D	BG, BP	50
CDR1 -B-0R6A--	0.6	B, C, D	BG, BP	50
CDR1 -B-0R7A--	0.7	B, C, D	BG, BP	50
CDR1 -B-0R8A--	0.8	B, C, D	BG, BP	50
CDR1 -B-0R9A--	0.9	B, C, D	BG, BP	50
CDR1 -B-1R0A--	1.0	B, C, D	BG, BP	50
CDR1 -B-1R1A--	1.1	B, C, D	BG, BP	50
CDR1 -B-1R2A--	1.2	B, C, D	BG, BP	50
CDR1 -B-1R3A--	1.3	B, C, D	BG, BP	50
CDR1 -B-1R4A--	1.4	B, C, D	BG, BP	50
CDR1 -B-1R5A--	1.5	B, C, D	BG, BP	50
CDR1 -B-1R6A--	1.6	B, C, D	BG, BP	50
CDR1 -B-1R7A--	1.7	B, C, D	BG, BP	50
CDR1 -B-1R8A--	1.8	B, C, D	BG, BP	50
CDR1 -B-1R9A--	1.9	B, C, D	BG, BP	50
CDR1 -B-2R0A--	2.0	B, C, D	BG, BP	50
CDR1 -B-2R1A--	2.1	B, C, D	BG, BP	50
CDR1 -B-2R2A--	2.2	B, C, D	BG, BP	50
CDR1 -B-2R4A--	2.4	B, C, D	BG, BP	50
CDR1 -B-2R7A--	2.7	B, C, D	BG, BP	50
CDR1 -B-3R0A--	3.0	B, C, D	BG, BP	50
CDR1 -B-3R3A--	3.3	B, C, D	BG, BP	50
CDR1 -B-3R6A--	3.6	B, C, D	BG, BP	50
CDR1 -B-3R9A--	3.9	B, C, D	BG, BP	50
CDR1 -B-4R3A--	4.3	B, C, D	BG, BP	50
CDR1 -B-4R7A--	4.7	B, C, D	BG, BP	50
CDR1 -B-5R1A--	5.1	B, C, D	BG, BP	50
CDR1 -B-5R6A--	5.6	B, C, D	BG, BP	50
CDR1 -B-6R2A--	6.2	B, C, D	BG, BP	50
CDR1 -B-6R8A--	6.8	B, C, J, K, M	BG, BP	50
CDR1 -B-7R5A--	7.5	B, C, J, K, M	BG, BP	50
CDR1 -B-8R2A--	8.2	B, C, J, K, M	BG, BP	50
CDR1 -B-9R1A--	9.1	B, C, J, K, M	BG, BP	50
CDR1 -B-100A--	10	F, G, J, K, M	BG, BP	50
CDR1 -B-110A--	11	F, G, J, K, M	BG, BP	50
CDR1 -B-120A--	12	F, G, J, K, M	BG, BP	50
CDR1 -B-130A--	13	F, G, J, K, M	BG, BP	50
CDR1 -B-150A--	15	F, G, J, K, M	BG, BP	50
CDR1 -B-160A--	16	F, G, J, K, M	BG, BP	50
CDR1 -B-180A--	18	F, G, J, K, M	BG, BP	50
CDR1 -B-200A--	20	F, G, J, K, M	BG, BP	50
CDR1 -B-220A--	22	F, G, J, K, M	BG, BP	50
CDR1 -B-240A--	24	F, G, J, K, M	BG, BP	50
CDR1 -B-270A--	27	F, G, J, K, M	BG, BP	50

Type Designation 1/	Capacitance in pF	Capacitance tolerance	Rated temperature and V/Temperature	WVDC
CDR1 -B-300A--	30	F, G, J, K, M	BG, BP	50
CDR1 -B-330A--	33	F, G, J, K, M	BG, BP	50
CDR1 -B-360A--	36	F, G, J, K, M	BG, BP	50
CDR1 -B-390A--	39	F, G, J, K, M	BG, BP	50
CDR1 -B-430A--	43	F, G, J, K, M	BG, BP	50
CDR1 -B-470A--	47	F, G, J, K, M	BG, BP	50
CDR1 -B-510A--	51	F, G, J, K, M	BG, BP	50
CDR1 -B-560A--	56	F, G, J, K, M	BG, BP	50
CDR1 -B-620A--	62	F, G, J, K, M	BG, BP	50
CDR1 -B-680A--	68	F, G, J, K, M	BG, BP	50
CDR1 -B-750A--	75	F, G, J, K, M	BG, BP	50
CDR1 -B-820A--	82	F, G, J, K, M	BG, BP	50
CDR1 -B-910A--	91	F, G, J, K, M	BG, BP	50
CDR1 -B-101A--	100	F, G, J, K, M	BG, BP	50
CDR1 -B-111A--	110	F, G, J, K, M	BP	50
CDR1 -B-121A--	120	F, G, J, K, M	BP	50
CDR1 -B-131A--	130	F, G, J, K, M	BP	50
CDR1 -B-151A--	150	F, G, J, K, M	BP	50
CDR1 -B-161A--	160	F, G, J, K, M	BP	50
CDR1 -B-181A--	180	F, G, J, K, M	BP	50
CDR1 -B-201A--	200	F, G, J, K, M	BP	50
CDR1 -B-221A--	220	F, G, J, K, M	BP	50
CDR1 -B-241A--	240	F, G, J, K, M	BP	50
CDR1 -B-271A--	270	F, G, J, K, M	BP	50
CDR1 -B-301A--	300	F, G, J, K, M	BP	50
CDR1 -B-331A--	330	F, G, J, K, M	BP	50
CDR1 -B-361A--	360	F, G, J, K, M	BP	50
CDR1 -B-391A--	390	F, G, J, K, M	BP	50
CDR1 -B-431A--	430	F, G, J, K, M	BP	50
CDR1 -B-471A--	470	F, G, J, K, M	BP	50
CDR1 -B-511A--	510	F, G, J, K, M	BP	50
CDR1 -B-561A--	560	F, G, J, K, M	BP	50
CDR1 -B-621A--	620	F, G, J, K, M	BP	50
CDR1 -B-681A--	680	F, G, J, K, M	BP	50
CDR1 -B-751A--	750	F, G, J, K, M	BP	50
CDR1 -B-821A--	820	F, G, J, K, M	BP	50
CDR1 -B-911A--	910	F, G, J, K, M	BP	50
CDR1 -B-102A--	1000	F, G, J, K, M	BP	50

1/Complete type designation will include additional symbols to indicate style, voltage-temperature limits, capacitance tolerance (where applicable), termination finish ("M" or "N" for style CDR11, and "S", "U", "W", "Y" or "Z" for style CDR12) and failure rate level.

Microwave MLC's



CDR Series – MIL-PRF-55681 (RF/Microwave Chips)

TABLE II: STYLES CDR13 AND CDR14 CAPACITOR CHARACTERISTICS

Type Designation 1/	Capacitance in pF	Capacitance tolerance	Rated temperature and V/Temperature	WVDC	Type Designation 1/	Capacitance in pF	Capacitance tolerance	Rated temperature and V/Temperature	WVDC
CDR1 -B-0R1*--	0.1	B	BG, BP	200/500	CDR1 -B-560*--	56	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R2*--	0.2	B	BG, BP	200/500	CDR1 -B-620*--	62	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R3*--	0.3	B, C	BG, BP	200/500	CDR1 -B-680*--	68	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R4*--	0.4	B, C	BG, BP	200/500	CDR1 -B-750*--	75	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R5*--	0.5	B, C, D	BG, BP	200/500	CDR1 -B-820*--	82	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R6*--	0.6	B, C, D	BG, BP	200/500	CDR1 -B-910*--	91	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R7*--	0.7	B, C, D	BG, BP	200/500	CDR1 -B-101*--	100	F, G, J, K, M	BG, BP	200/500
CDR1 -B-0R8*--	0.8	B, C, D	BG, BP	200/500	CDR1 -B-111±--	110	F, G, J, K, M	BG, BP	200/300
CDR1 -B-0R9*--	0.9	B, C, D	BG, BP	200/500	CDR1 -B-121±--	120	F, G, J, K, M	BG, BP	200/300
CDR1 -B-1R0*--	1.0	B, C, D	BG, BP	200/500	CDR1 -B-131*--	130	F, G, J, K, M	BG, BP	200/300
CDR1 -B-1R1*--	1.1	B, C, D	BG, BP	200/500	CDR1 -B-151*--	150	F, G, J, K, M	BG, BP	200/300
CDR1 -B-1R2*--	1.2	B, C, D	BG, BP	200/500	CDR1 -B-161±--	160	F, G, J, K, M	BG, BP	200/300
CDR1 -B-1R3*--	1.3	B, C, D	BG, BP	200/500	CDR1 -B-181*--	180	F, G, J, K, M	BG, BP	200/300
CDR1 -B-1R4*--	1.4	B, C, D	BG, BP	200/500	CDR1 -B-201*--	200	F, G, J, K, M	BG, BP	200/300
CDR1 -B-1R5*--	1.5	B, C, D	BG, BP	200/500	CDR1 -B-221C*--	220	F, G, J, K, M	BG, BP	200
CDR1 -B-1R6*--	1.6	B, C, D	BG, BP	200/500	CDR1 -B-241C*--	240	F, G, J, K, M	BG, BP	200
CDR1 -B-1R7*--	1.7	B, C, D	BG, BP	200/500	CDR1 -B-271C*--	270	F, G, J, K, M	BG, BP	200
CDR1 -B-1R8*--	1.8	B, C, D	BG, BP	200/500	CDR1 -B-301C*--	300	F, G, J, K, M	BG, BP	200
CDR1 -B-1R9*--	1.9	B, C, D	BG, BP	200/500	CDR1 -B-331C*--	330	F, G, J, K, M	BG, BP	200
CDR1 -B-2R0*--	2.0	B, C, D	BG, BP	200/500	CDR1 -B-361C*--	360	F, G, J, K, M	BG, BP	200
CDR1 -B-2R1*--	2.1	B, C, D	BG, BP	200/500	CDR1 -B-391C*--	390	F, G, J, K, M	BG, BP	200
CDR1 -B-2R2*--	2.2	B, C, D	BG, BP	200/500	CDR1 -B-431C*--	430	F, G, J, K, M	BG, BP	200
CDR1 -B-2R4*--	2.4	B, C, D	BG, BP	200/500	CDR1 -B-471C*--	470	F, G, J, K, M	BG, BP	200
CDR1 -B-2R7*--	2.7	B, C, D	BG, BP	200/500	CDR1 -B-511B*--	510	F, G, J, K, M	BG, BP	100
CDR1 -B-3R0*--	3.0	B, C, D	BG, BP	200/500	CDR1 -B-561B*--	560	F, G, J, K, M	BG, BP	100
CDR1 -B-3R3*--	3.3	B, C, D	BG, BP	200/500	CDR1 -B-621B*--	620	F, G, J, K, M	BG, BP	100
CDR1 -B-3R6*--	3.6	B, C, D	BG, BP	200/500	CDR1 -B-681A*--	680	F, G, J, K, M	BG, BP	50
CDR1 -B-3R9*--	3.9	B, C, D	BG, BP	200/500	CDR1 -B-751A*--	750	F, G, J, K, M	BG, BP	50
CDR1 -B-4R3*--	4.3	B, C, D	BG, BP	200/500	CDR1 -B-821A*--	820	F, G, J, K, M	BG, BP	50
CDR1 -B-4R7*--	4.7	B, C, D	BG, BP	200/500	CDR1 -B-911A*--	910	F, G, J, K, M	BG, BP	50
CDR1 -B-5R1*--	5.1	B, C, D	BG, BP	200/500	CDR1 -B-102A*--	1000	F, G, J, K, M	BG, BP	50
CDR1 -B-5R6*--	5.6	B, C, D	BG, BP	200/500	CDR1 -B-112A*--	1100	F, G, J, K, M	BP	50
CDR1 -B-6R2*--	6.2	B, C, D	BG, BP	200/500	CDR1 -B-122A*--	1200	F, G, J, K, M	BP	50
CDR1 -B-6R8*--	6.8	B, C, J, K, M	BG, BP	200/500	CDR1 -B-132A*--	1300	F, G, J, K, M	BP	50
CDR1 -B-7R5*--	7.5	B, C, J, K, M	BG, BP	200/500	CDR1 -B-152A*--	1500	F, G, J, K, M	BP	50
CDR1 -B-8R2*--	8.2	B, C, J, K, M	BG, BP	200/500	CDR1 -B-162A*--	1600	F, G, J, K, M	BP	50
CDR1 -B-9R1*--	9.1	B, C, J, K, M	BG, BP	200/500	CDR1 -B-182A*--	1800	F, G, J, K, M	BP	50
CDR1 -B-100*--	10	F, G, J, K, M	BG, BP	200/500	CDR1 -B-202A*--	2000	F, G, J, K, M	BP	50
CDR1 -B-110*--	11	F, G, J, K, M	BG, BP	200/500	CDR1 -B-222A*--	2200	F, G, J, K, M	BP	50
CDR1 -B-120*--	12	F, G, J, K, M	BG, BP	200/500	CDR1 -B-242A*--	2400	F, G, J, K, M	BP	50
CDR1 -B-130*--	13	F, G, J, K, M	BG, BP	200/500	CDR1 -B-272A*--	2700	F, G, J, K, M	BP	50
CDR1 -B-150*--	15	F, G, J, K, M	BG, BP	200/500	CDR1 -B-302A*--	3000	F, G, J, K, M	BP	50
CDR1 -B-160*--	16	F, G, J, K, M	BG, BP	200/500	CDR1 -B-332A*--	3300	F, G, J, K, M	BP	50
CDR1 -B-180*--	18	F, G, J, K, M	BG, BP	200/500	CDR1 -B-362A*--	3600	F, G, J, K, M	BP	50
CDR1 -B-200*--	20	F, G, J, K, M	BG, BP	200/500	CDR1 -B-392A*--	3900	F, G, J, K, M	BP	50
CDR1 -B-220*--	22	F, G, J, K, M	BG, BP	200/500	CDR1 -B-432A*--	4300	F, G, J, K, M	BP	50
CDR1 -B-240*--	24	F, G, J, K, M	BG, BP	200/500	CDR1 -B-472A*--	4700	F, G, J, K, M	BP	50
CDR1 -B-270*--	27	F, G, J, K, M	BG, BP	200/500	CDR1 -B-502A*--	5000	F, G, J, K, M	BP	50
CDR1 -B-300*--	30	F, G, J, K, M	BG, BP	200/500	CDR1 -B-512A*--	5100	F, G, J, K, M	BP	50
CDR1 -B-330*--	33	F, G, J, K, M	BG, BP	200/500					
CDR1 -B-360*--	36	F, G, J, K, M	BG, BP	200/500					
CDR1 -B-390*--	39	F, G, J, K, M	BG, BP	200/500					
CDR1 -B-430*--	43	F, G, J, K, M	BG, BP	200/500					
CDR1 -B-470*--	47	F, G, J, K, M	BG, BP	200/500					
CDR1 -B-510*--	51	F, G, J, K, M	BG, BP	200/500					

1/Complete type designation will include additional symbols to indicate style, voltage-temperature limits, capacitance tolerance (where applicable), termination finish ("M" or "N" for style CDR13, and "S", "U", "W", "Y" or "Z" for style CDR14) and failure rate level.

*C=200V; E=500V.

†C=200V; D=300V.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Multilayer Ceramic Capacitors MLCC - Leaded category:

Click to view products by AVX manufacturer:

Other Similar products are found below :

[010-007220-002REV A](#) [M39014/01-1210V](#) [M39014/01-1281V](#) [M39014/01-1335V](#) [M39014/01-1571V](#) [M39014/01-1578V](#) [M39014/01-1593](#)
[M39014/02-1265V](#) [M39014/02-1347](#) [M39014/02-1350](#) [M39014/02-1356VTR1](#) [M39014/22-0167](#) [M39014/22-0734](#) [87043-49](#) [Q52-DK](#)
[AR215F103K4RTR2-3323](#) [C0603C309C5GACTU-CUT-TAPE](#) [C410C221K1G5TATR](#) [C420C102J1G5TATR](#) [C430C104M1U5TATR](#)
[SL155C222MAB](#) [FK26X7R2E104KN006](#) [CCR06CG183GRV](#) [CFB1/2C101J](#) [CFB1/2C102J](#) [CN20C102K](#) [M39014/01-1317](#) [M39014/01-1572V](#) [M39014/01-1594V](#) [M39014/02-1236](#) [M39014/02-1321V](#) [M39014/02-1345V](#) [M39014/22-0351](#) [M39014/22-0695](#) [M39014/220767](#)
[M39014/220788](#) [M39014/22-1005](#) [MA405E334MAA](#) [MD015A103KAB](#) [SL301E105MAB](#) [CCR05CG242FRV](#) [KTD101B684M32A0B00](#)
[CCR07CG473KR](#) [CCR05CG820JP](#) [TKC-TMC1206-05-1501-J??](#) [TKC-TMC1206-05-1801-J](#) [TKC-TMC1206-05-20R0-F](#) [TKC-TMC1206-05-3901-J](#) [TKC-TMC1206-05-44R2-F](#) [TKC-TMC1206-05-4703-J??](#)