

# MXC-6300/6310/6320 Series

*IHigh Performance 3rd Generation Intel® Core™ i7/i5/i3 Processor-based Fanless Expandable Embedded Computer with PCI/PCIe Slots*

## Features

- Supports 3rd generation Intel® Core™ i7/i5/i3 processor + QM77 chipset
- 2 x DDR3 SO-DIMM socket, supporting up to 16 GB memory
- 1 PCI +2 PCIe x8 slots or 1 PCI + 1 PCIe x16 for MXC-6300 series; 1 PCI + 1 PCIe x16 for MXC-6310 series, 3 PCI + 1 PCIe x16 for MXC-6320 series
- 3 independent display capability with onboard 2 DisplayPort + 1 DVI-I
- 6 external USB ports (4 USB 3.0 + 2 USB 2.0) + 1 internal USB 2.0
- 2 Intel® GbE ports with teaming function, Intel® iAMT 8.0
- 2 CFast sockets, onboard SATA III for 2 x 2.5" HDD/SSD installation,SATA 6Gb/s and RAID 0,1 support
- Built-in 9 VDC to 32 VDC wide-range DC power input
- Rugged, up to -20°C to 60°C (-4°F to 140°F) fanless operation (w/ industrial SSD)

## Introduction

The Matrix MXC-6300/6310/6320 series is a high-performance fanless embedded computer integrating a 3rd generation Intel® Core™ i7/i5/i3 processor and QM77 chipset to provide powerful computing and superior graphic performance. Graphic-intensive and computing-oriented applications including image and vision measurement, machine automation, maritime automation, surveillance and high-resolution medical imaging all benefit.

Increased PCI & PCI express (Gen2) expansion slots allow installation of a variety of PCI, PCIe x8 or PCIe x16 add-on cards, meeting the needs of application platform development environments. In addition, the MXC-6300/6310/6320 series offers 2 DisplayPort and one DVI-I port for three independent display support connections, four USB 3.0 and two USB 2.0 ports, and 2 GbE LAN ports with teaming function. The two 2.5" onboard SATA III ports with high speed SATA 6 Gb/s and RAID 0, 1 ensure all data in the RAID array is fully backed up. Built-in 16 CH isolated DIO provides overall industrial control.

Delivering high quality, durable and compact construction, the MXC-6300/6310/6320 series leverages a reliable fanless and cable-free configuration, optimal thermal dissipation, and easy installation for flexible and user-friendly system development and application implementation in harsh environments.

## Applications

- Factory Automation / Machine Vision
- Intelligent Transportation Systems / Surveillance
- Maritime Automation
- High Resolution Medical Imaging



## Software Support

- Windows® 7/Embedded standard 7/XP/XP Embedded
- Linux


## Ordering Information

- **MXC-6301D**  
Intel® Core™ i7-3610QE fanless computer
- **MXC-6302D**  
Intel® Core™ i5-3610ME fanless computer
- **MXC-6303D**  
Intel® Core™ i3-3120ME fanless computer
- **MXC-6305D**  
Intel® Celeron 1020E fanless computer
- **MXC-6311D**  
Intel® Core™ i7-3610QE fanless computer
- **MXC-6312D**  
Intel® Core™ i5-3610ME fanless computer
- **MXC-6313D**  
Intel® Core™ i3-3120ME fanless computer
- **MXC-6321D**  
Intel® Core™ i7-3610QE fanless computer
- **MXC-6322D**  
Intel® Core™ i5-3610ME fanless computer
- **MXC-6323D**  
Intel® Core™ i3-3120ME fanless computer

## Optional Accessories

- **MXC-6300/6310 Optional Fan Module**  
Fan module for MXC-6300/6310 series
- **500 GB/1 TB HDD Option**  
Factory-installed 500 GB/1 TB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
- **32/64 GB SSD Option**  
Factory-installed 32/64 GB MLC SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
- **160 W AC-DC Adapter**  
160 W industrial grade A C-DC adapter (-20°C to 70°C, -4°F to 158°F)

## Product Illustration

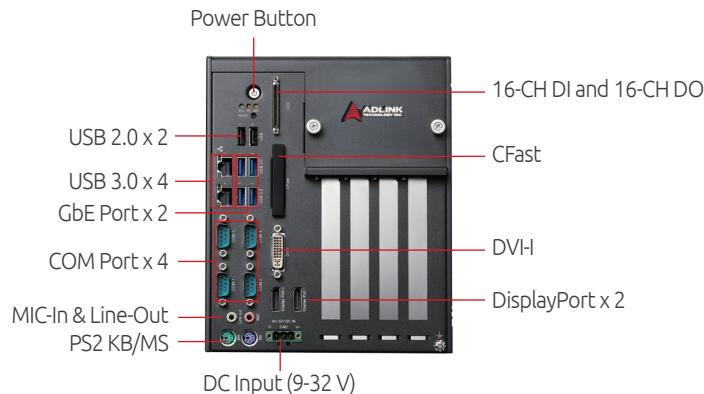

## Specifications

Model Name	MXC-6301D/6311D/6321D	MXC-6302D/6312D/6322D	MXC-6303D/6313D/6323D	MXC-6305D
<b>System Core</b>				
Processor	Intel® Core™ i7-3610QE, 2.3/3.3 GHz, 6M cache	Intel® Core™ i5-3610ME, 2.7/3.3 GHz, 3 M cache	Intel® Core™ i3-3120ME, 2.4 GHz, 3 M cache	Intel® Celeron 1020E, 2.2 GHz, 2 M cache
Chipset		Intel® Mobile Platform Controller Hub (QM77)		
Video	Three independent display capability (2 DisplayPort + 1 VGA or 2 DisplayPort + 1 DVI-D) 1st DP: up to 2560x1600 / 2nd DP: up to 1920x1600 / DVI-I port: up to 1920x1200			
Memory	4 GB DDR3 1600 MHz SODIMM module (Max. capacity 16 GB with 2 SODIMM socket option)			
<b>I/O Interface</b>				
Expansion Slots	1 PCI +2 PCIe x8 slots or 1 PCI + 1 PCIe x16 (MXC-6300 series), 1 PCI + 1 PCIe x16 (MXC-6310 series), 3 PCI + 1 PCIe x16 (MXC-6320 series)			
Ethernet	2 Intel® GbE ports (1 Intel® Springville WGI210IT + 1 82579LM) Support Teaming function, Intel iAMT 8.0, Wake On LAN			
Serial Ports	2 software-programmable RS-232/422/485 (COM 1&2) with autoflow control, 2 RS-232 (COM 3&4)			
USB	6 external USB ports (4 USB 3.0 + 2 USB 2.0) + 1 internal USB 2.0			
DIO	16-CH DI and 16-CH DO with 1.5KV isolation			
Audio	1 MIC-in and 1 Line-out			
KB/MS	1 PS/2 keyboard and 1 PS/2 mouse			
WDT	Supports a watchdog timer			
<b>Power Supply</b>				
DC Input	Built-in 9-32 VDC wide-range DC input pluggable connectors with latch (GND, V-, V+), 2-pin remote power on/off switch			
AC Input	Optional 160 W external AC-DC adapter for AC input			
<b>Storage Device</b>				
SATA HDD	2 onboard SATA-III for 2.5" HDD/SSD installation, SATA RAID 0,1 & SATA 6 Gb/s support			
CompactFlash	2 CFast socket (1 external + 1 internal)			
<b>Mechanical</b>				
Optional Fan Module	Optional fan module for dissipating heat generated by PCI/PCIe card, Smart fan control MXC-6300/MXC-6320 series: 172.5 (W) x 225 (D) x 213 (H) mm (6.9" x 9" x 8.52"); MXC-6310 series: 154 (W) x 225 (D) x 213 (H) mm (6.16" x 9" x 8.52")			
Dimensions	MXC-6300/6320 series: 4.3 kg (9.5 lbs); MXC-6310 series: 3.8kg (8.39 lbs)			
Weight				
Mounting	Wall-mount kit			
<b>Environmental</b>				
Operating Temperature	Standard: 0°C to 50°C (32°F to 122°F) Extended temperature option*: -20°C to 55°C (-4°F to 131°F) (w/industrial SSD or CFast) for MXC-6301D/6311D -20°C to 60°C (-4°F to 140°F) (w/industrial SSD or CFast) for MXC-6302D/6303D/6312D/6313D			
Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CFast)			
Humidity	~95% @ 40°C (104°F) (non-condensing)			
Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CFast or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)			
ESD	Contact +/-4 KV and Air +/-8 KV			
Shock	Operating, 50 G, half sine 11 ms duration (w/ CFast or SSD)			
EMC	CE and FCC Class A			
Safety	UL/cUL, CB, KCC			

## Versatile Expansion

The MXC-6300 series offer various of expansion slot options for flexible function enhancement and easier system integration.

### MXC-6300 (3 Slots)



PCIe x 16  
PCIe x 8  
PCI

Recommended expansion slot configuration options for MXC-6300:

1 PCI +2 PCIe x8 slots or 1 PCI + 1 PCIe x16

### MXC-6310 (2 Slots)



PCIe x 16  
PCI

### MXC-6320 (4 Slots)



3 x PCI  
PCIe x 16

## Easy-to-install Optional Fan Module

