

## ADN-C Series

120 - 480 Watts

Industrial

**Total Power:** 120 - 480 Watts  
**Input Voltage:** 85-264 Vac  
90-375 Vdc  
**# of Outputs:** Single

### Special Features

- Slim form factor
- Five year warranty
- High Efficiency > 90% Typ.
- Full Power at 60 ° C
- Power Boost™
- Industrial Grade Design
  - Metal mounting clip
  - Metal case
- MTBF > 450Khr demonstrated at 40°C 115Vac
- Active PFC > 0.92
- Adjustable output
- OVP protection with autorecovery
- Continuous short circuit and overload protection
- SEMI F47 Sag Immunity
- 3 Status LEDs  
Input / Output / Alarm
- DCOK Relay
- Parallel operation capability
- Screw terminal connections
- RoHS Compliant
- No tools required for mounting

### Safety

- UL 508, cULus Listed
- UL 60950-1, cURus
- IEC 60950-1
- Class I, Div 2 Hazardous Locations
- IP20
- CE



## Product Descriptions

The ADN-C series has improved upon the superior reliability of the ADN Series of AC-DC power supplies with increased Mean Time Between Failure (MTBF) by reducing the part count and strategic use of high quality components. In addition to being extremely reliable by design, the ADN-C has built-in protection from over temperature, overloads and short circuits. This ensures that reliability is not compromised by operation temporarily outside of normal conditions. Intuitive visual diagnostics help ensure easy troubleshooting when such conditions occur so that equipment downtime can be minimized.

The ADN-C series features a universal 85-264 Vac input – enabling it to be used anywhere in the world – and is also capable of operating from a 90-375 Vdc input. The power supply produces a tightly regulated 24V output of up to 480W continuously with convection cooling. The main output can be adjusted over the range from 22.5V to 28.5V (24V to 28V for ADN20-24-1PM-C) over nominal factory set output voltage of 24.5V

Active power factor correction is employed to minimize input harmonic current distortion and ensure compliance with the international EN61000-3-2 standard. The power supplies have a full load ambient operating temperature range of -25 to +60 degrees Celsius without de-rating at convection cooling condition. Operation between 60 and 70 degrees Celsius, the output should be derated by 5 percent per degree.

## Model Numbers

Rev.10.07.08 #2.2  
ADN-C Series  
Page 2

| Standard       | Output Voltage | Minimum Load | Maximum Load Current ( $I_{O,max}$ ) | Maximum Load Power ( $P_{O,max}$ ) |
|----------------|----------------|--------------|--------------------------------------|------------------------------------|
| ADN5-24-1PM-C  | 24Vdc          | 0A           | 5A                                   | 120W                               |
| ADN10-24-1PM-C | 24Vdc          | 0A           | 10A                                  | 240W                               |
| ADN20-24-1PM-C | 24Vdc          | 0A           | 20A                                  | 480W                               |

## Options

None

# Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

| Parameter   | Model          | Symbol      | Min    | Typ | Max                | Unit |
|---|----------------|-------------|--------|-----|--------------------|------|
| Input Voltage:<br>AC continuous operation<br>DC continuous operation                        | All models     | $V_{IN,AC}$ | 85     | -   | 264                | Vac  |
|   | All models     | $V_{IN,DC}$ | 90     | -   | 375                | Vdc  |
| Maximum Output Power, continuous  | ADN5-24-1PM-C  | $P_{O,max}$ | -      | -   | 120                | W    |
|   | ADN10-24-1PM-C |             | -      | -   | 240                |      |
|   | ADN20-24-1PM-C |             | -      | -   | 480                |      |
| Isolation Voltage<br>Input to outputs<br>Input to safety ground<br>Outputs to safety ground | All models     |             | -      | -   | 2500               | Vdc  |
|   | All models     |             | -      | -   | 2500               | Vdc  |
|   | All models     |             | -      | -   | 100                | Vdc  |
| Ambient Operating Temperature   | ADN5-24-1PM-C  | $T_A$       | -10    | -   | +70 <sup>1,2</sup> | °C   |
|   | ADN10-24-1PM-C |             | -10    | -   | +70 <sup>1,2</sup> |      |
|   | ADN20-24-1PM-C |             | -25    | -   | +70 <sup>1,2</sup> |      |
| Storage Temperature   | ADN5-24-1PM-C  | $T_{STG}$   | -25    | -   | +85                | °C   |
|   | ADN10-24-1PM-C |             | -25    | -   | +85                |      |
|   | ADN20-24-1PM-C |             | -40    | -   | +85                |      |
| Humidity (non-condensing)<br>Operating<br>Non-operating                                     | All models     |             | 5      | -   | 90                 | %    |
|   | All models     |             | 0      | -   | 95                 | %    |
| Altitude<br>Operating<br>Non-operating  | All models     |             | 0      | -   | 10,000             | feet |
|   | All models     |             | -1,000 | -   | 50,000             | feet |

Note 1 - Derate each output at 5% per degree C from 60°C to 70°C

Note 2 - Operation up to 50% load permissible with sideways (horizontal) or front side up (top) mounting orientation

# Electrical Specifications

Rev.10.07.08 #2.2  
ADN-C Series  
Page 4

## Input Specifications

Table 2. Input Specifications:

| Parameter   | Conditions   | Symbol            | Min             | Typ            | Max            | Unit     |
|---|--|-------------------|-----------------|----------------|----------------|----------|
| Operating Input Voltage, AC                                 | All  | $V_{IN,AC}$       | 85              | 115/230        | 264            | Vac      |
| Input AC Frequency  | All  | $f_{IN}$          | 47              | 50/60          | 63/400         | Hz       |
| Operating Input Voltage, DC                                 | All  | $V_{IN,DC}$       | 90              | -              | 375            | Vdc      |
| Maximum steady state Input Current                          | ADN5<br>ADN10<br>ADN20<br>$V_{IN,AC} = 85V_{AC}$                                 | $I_{IN,max}$      | -<br>-          | -<br>-         | 4<br>6<br>8    | Aac      |
| Harmonic Line Currents                                      | All  | THD               | Per EN61000-3-2 |                |                |          |
| Power Factor  | $I_O = I_{O,max}$<br>$V_{IN,AC} = 85 \text{ to } 264V_{AC}$                      | PF                | 0.92            | -              | -              |          |
| Startup Surge Current (Inrush) @ 25°C                       | ADN5<br>ADN10<br>ADN20<br>$V_{IN,AC} = 264V_{AC}$                                | $I_{IN,surge}$    | -<br>-<br>-     | -<br>-<br>-    | 15<br>30<br>40 | $A_{PK}$ |
| Input Fuse  | ADN5<br>ADN10<br>ADN20<br>Internal, L line<br>250VAC rated<br>MXEP type          |                   | -               | -              | 3<br>5<br>10   | A        |
| Input AC Low Line Start-up Voltage                          | $I_O = I_{O,max}$  | $V_{IN,AC-start}$ | 70              | -              | 78             | Vac      |
| PFC Switching Frequency                                     | All  | $f_{SW,PFC}$      | 43              | -              | 53             | kHz      |
| DCDC Switching Frequency                                    | All  | $f_{SW,DC-DC}$    | 84              | -              | 90             | kHz      |
| Efficiency ( $T_A = 25^\circ\text{C}$ , forced air cooling) | ADN5<br>ADN10<br>ADN20<br>$V_{IN,AC} = 230V_{AC}$<br>$I_O = I_{O,max}$           | $\eta$            | -<br>-<br>-     | 90<br>90<br>92 | -<br>-<br>-    | %        |
| Hold Up Time  | $V_{IN,AC} = 100V_{AC}$<br>$P_O = P_{O,max}$<br>$T_A = 25^\circ\text{C}$         | $t_{Hold-Up}$     | 20              | -              | -              | mSec     |
| Turn On Delay   | Resistive Load<br>Capacitive Load<br>$V_{IN,AC} = 85V_{AC}$<br>$I_O = I_{O,max}$ | $t_{Turn-On}$     | -<br>-          | -<br>-         | 1.0<br>1.5     | Sec      |

## Output Specifications

Table 3. Output Specifications:


| Parameter                         |                        | Condition   | Symbol          | Min                  | Typ         | Max                  | Unit                |
|-----------------------------------|------------------------|---|-----------------|----------------------|-------------|----------------------|---------------------|
| Factory Set Voltage               | All models             | $I_O = 0A$  | $V_{O,Factory}$ | 24.25                | 24.50       | 24.75                | V                   |
| Output Adjust Range               | ADN5<br>ADN10<br>ADN20 | $I_O = 0A$  | $V_O$           | 22.5<br>22.5<br>24.0 | -<br>-<br>- | 28.5<br>28.5<br>28.0 | V                   |
| Line / Load Regulation            | All models             | $V_{IN,AC} = 85 \text{ to } 264V_{ac}$<br>$I_O = 0 \text{ to } I_{O,max}$                             | $V_O$           | -0.5                 | -           | +0.5                 | % $V_O$             |
| Total Regulation                  | All models             | Inclusive of line, load temperature change, warm-up drift   | $V_O$           | -2.0                 | -           | +2.0                 | % $V_O$             |
| Output Ripple, pk-pk              | ADN5<br>ADN10<br>ADN20 | See note 1  | $V_O$           | -<br>-<br>-          | -<br>-<br>- | 50<br>50<br>100      | mV <sub>PK-PK</sub> |
| Output Current, continuous        | ADN5<br>ADN10<br>ADN20 | See note 2 and 3  | $I_{O,max}$     | 0<br>0<br>0          | -<br>-<br>- | 5<br>10<br>20        | A                   |
| Maximum Output Power, continuous  | ADN5<br>ADN10<br>ADN20 |   | $P_{O,max}$     | -<br>-<br>-          | -<br>-<br>- | 120<br>240<br>480    | W                   |
| Output Current, peak              | ADN5<br>ADN10<br>ADN20 | $V_O \geq 20.0V$ , 4 sec max  | $I_{O,peak}$    | 7.5<br>15<br>30      | -<br>-<br>- | -<br>-<br>-          | A                   |
| Output Current, short circuit     | All models             | $V_O \leq 0.5V$ , auto recovery   | $I_{O,SC}$      | 160                  | -           | -                    | % $I_{O,max}$       |
| Dynamic Response - Peak Deviation | All models             | 50% to 100% of $I_{O,max}$ load change<br>Slew rate = $1A/\mu s$<br>Output capacitance = $100\mu F/A$ | $\pm\%V_O$      | -                    | -           | 2                    | %                   |
| Dynamic Response - Setting Time   | All models             |   | $t_s$           | -                    | -           | 5                    | mSec                |
| Turn On Overshoot                 | All models             | $I_O = 0$   | % $V_O$         | -                    | -           | 2                    | %                   |
| Over Voltage Protection           |                        | Auto recovery   | $V_O$           | 30.5                 | -           | 33.0                 | V                   |
| Back EMF Immunity                 |                        | No damage, auto recovery  | $V_O$           | -                    | -           | 35.0                 | V                   |
| Load Capacitance                  | All models             | Startup   | $C_O$           | 0                    | -           | 7000                 | $\mu F$             |
| Over Temperature Protection       |                        | All   |                 | Auto Recovery        |             |                      |                     |

Note 1 - Measure with a  $0.1\mu F$  ceramic capacitor in parallel with a  $10\mu F$  tantalum capacitor using a 20MHz bandwidth limited oscilloscope


Note 2 - Standard operating orientation is front side facing forward.

Note 3 - Operation up to 50% load permissible with sideways (horizontal) or front side up (top) mounting orientation


# ADN5-24-1PM-C Performance Curves

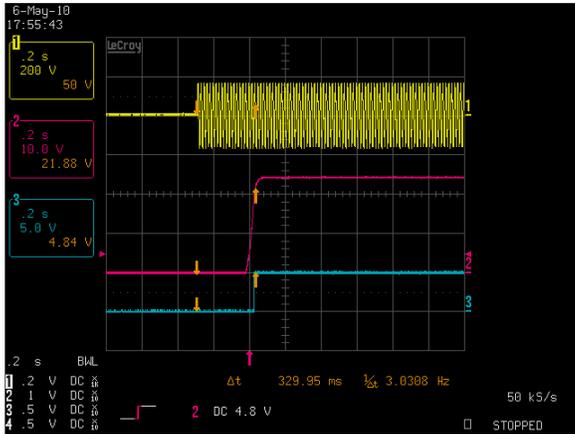


**Figure 1: ADN5-24-1PM-C Turn-on delay**  
 Vin = 115Vac Load: Io = 5.0A  
 Ch 1: AC Mains Ch 2: Vo Ch 3: DCOK

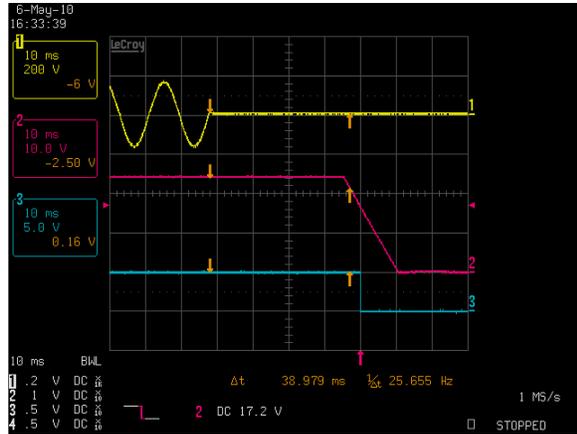


**Figure 2: ADN5-24-1PM-C Hold-up Time (time to decay)**  
 Vin = 115Vac Load: Io = 5.0A  
 Ch 1: AC Mains Ch 2: Vo Ch 3: DCOK

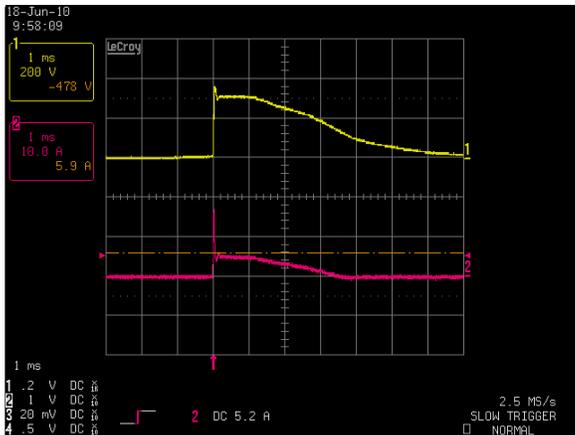


**Figure 3: ADN5-24-1PM-C Inrush Current**  
 Vin = 230Vac Load: Io = 0A, Turn on angle = 90 deg  
 Ch 1: AC Mains Ch 2: I<sub>N</sub>

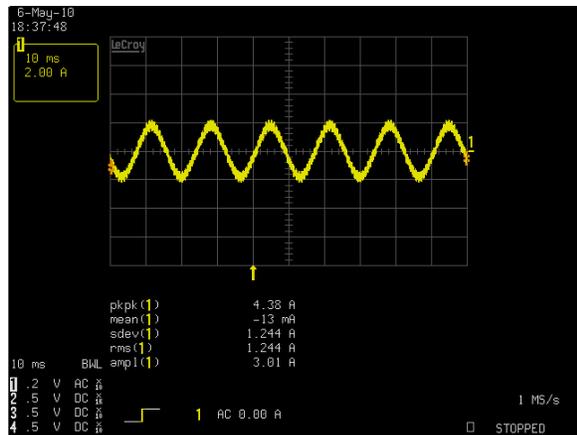

**Figure 4: ADN5-24-1PM-C Input Current Waveform**  
 Vin = 115Vac Load: Io = 5.0A  
 Ch 1: I<sub>N</sub>

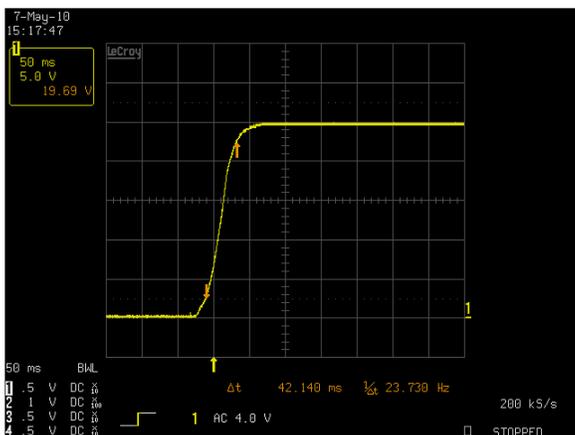


**Figure 5: ADN5-24-1PM-C Output Voltage Startup Characteristic**  
 Vin = 90Vac Load: Io = 5.0A, Output Capacitance = 330uF/A  
 Ch 1: Vo

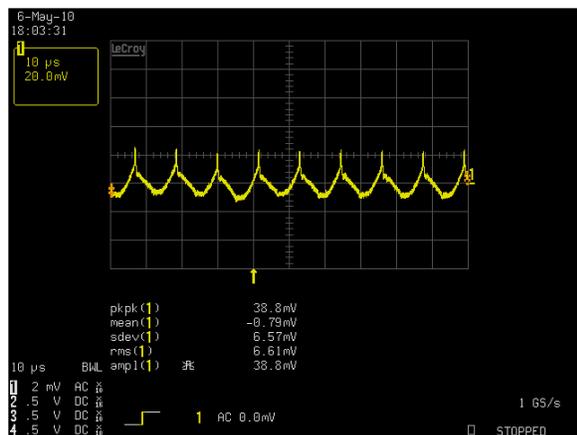


**Figure 6: ADN5-24-1PM-C Ripple and Noise Measurement**  
 Vin = 115Vac Load: Io = 5.0A  
 Ch 1: Vo



# ADN5-24-1PM-C Performance Curves

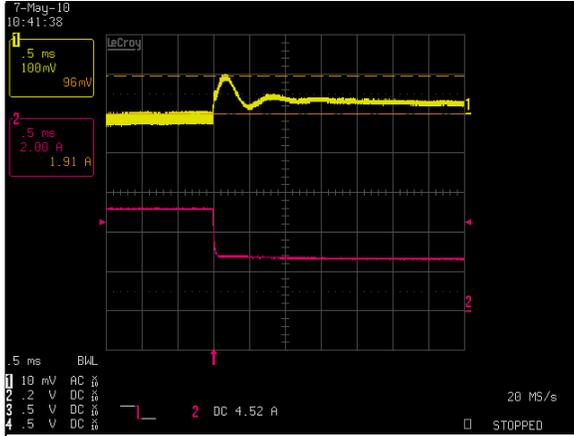


**Figure 7: ADN5-24-1PM-C Transient Response – High to Low**  
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate  
Ch 1: Vo Ch 2: Io

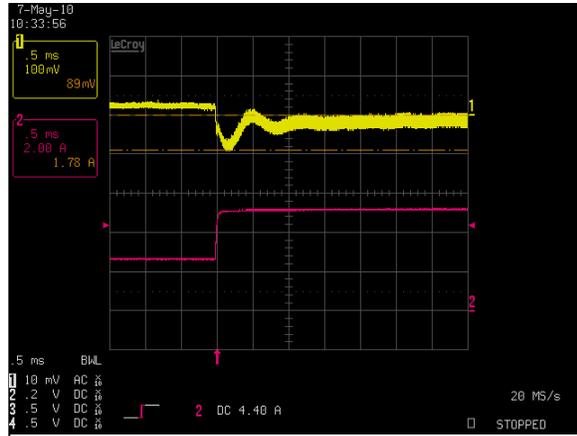


**Figure 8: ADN5-24-1PM-C Transient Response – Low to High**  
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate  
Ch 1: Vo Ch 2: Io

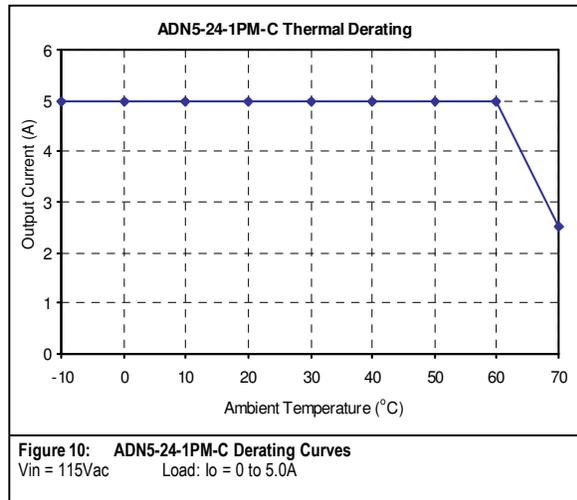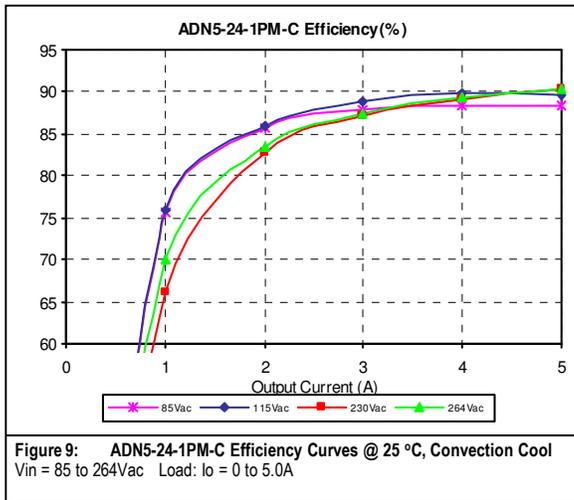


# ADN10-24-1PM-C Performance Curves

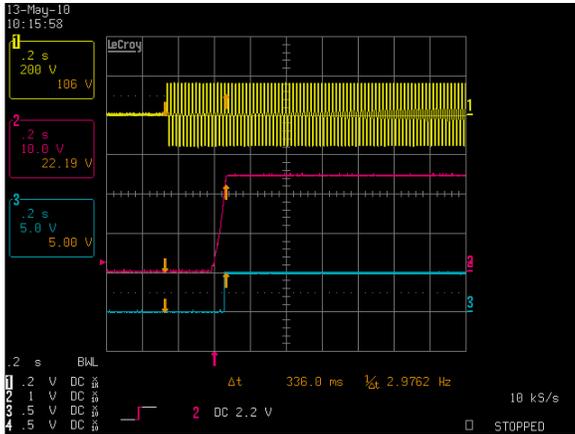


**Figure 11: ADN10-24-1PM-C Turn-on delay**  
Vin = 115Vac Load: Io = 10.0A  
Ch 1: AC Mains Ch 2: Vo Ch 3: DCOK

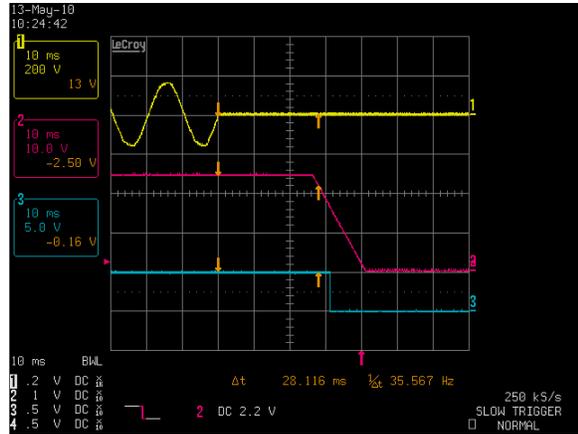


**Figure 12: ADN10-24-1PM-C Hold-up Time (time to decay)**  
Vin = 115Vac Load: Io = 10.0A  
Ch 1: AC Mains Ch 2: Vo Ch 3: DCOK

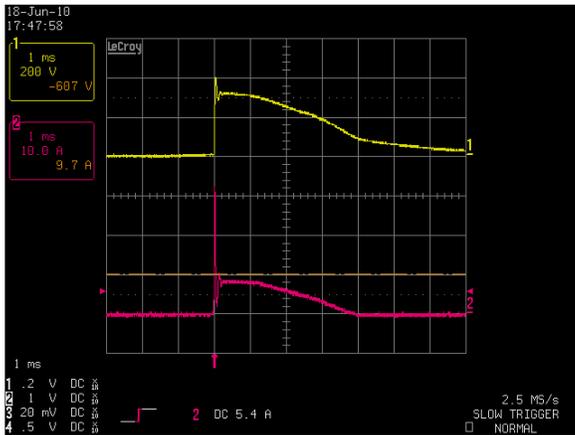


**Figure 13: ADN10-24-1PM-C Inrush Current**  
Vin = 230Vac Load: Io = 0A, Turn on angle = 90 deg  
Ch 1: AC Mains Ch 2: I<sub>N</sub>

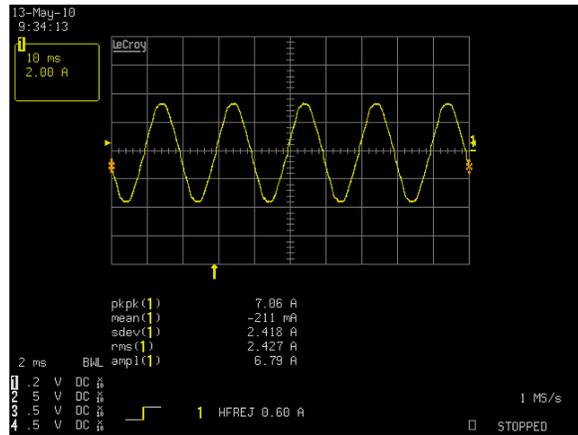

**Figure 14: ADN10-24-1PM-C Input Current Waveform**  
Vin = 115Vac Load: Io = 10.0A  
Ch 1: I<sub>N</sub>

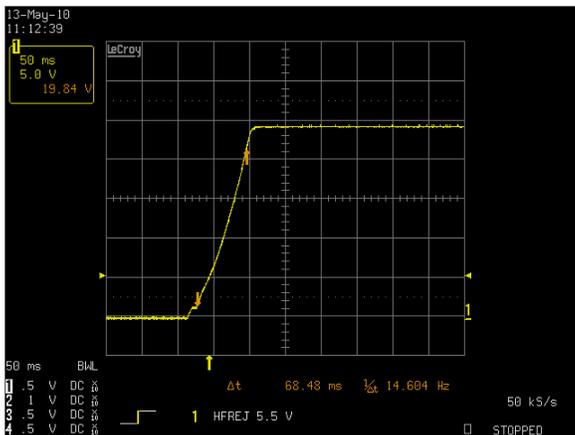


**Figure 15: ADN10-24-1PM-C Output Voltage Startup Characteristic**  
Vin = 90Vac Load: Io = 10.0A, Output Capacitance = 330uF/A  
Ch 1: Vo

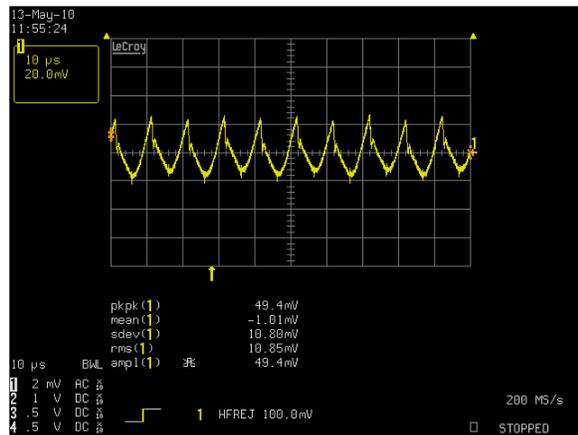


**Figure 16: ADN10-24-1PM-C Ripple and Noise Measurement**  
Vin = 115Vac Load: Io = 10.0A  
Ch 1: Vo


# ADN10-24-1PM-C Performance Curves

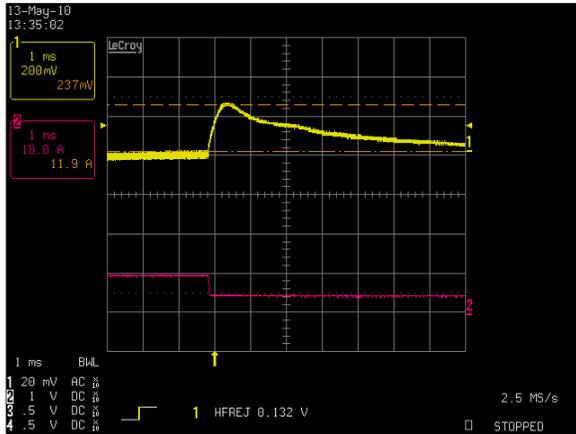


**Figure 17: ADN10-24-1PM-C Transient Response – High to Low**  
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate  
Ch 1: Vo Ch 2: Io

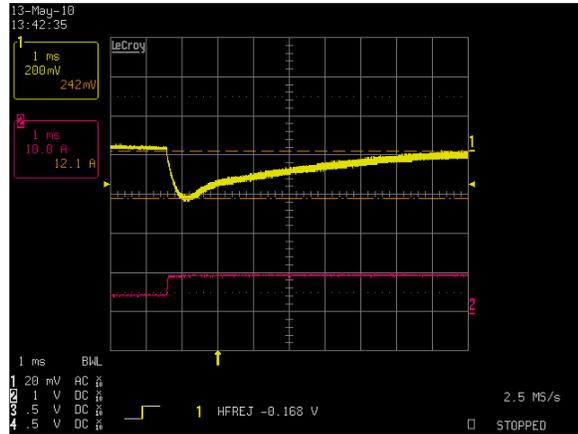

**Figure 18: ADN10-24-1PM-C Transient Response – Low to High**  
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate  
Ch 1: Vo Ch 2: Io

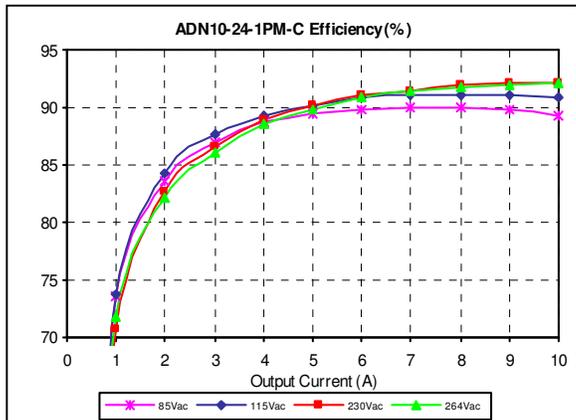


**Figure 19: ADN10-24-1PM-C Efficiency Curves @ 25 °C, Convection Cool**  
Vin = 85 to 264Vac Load: Io = 0 to 10.0A

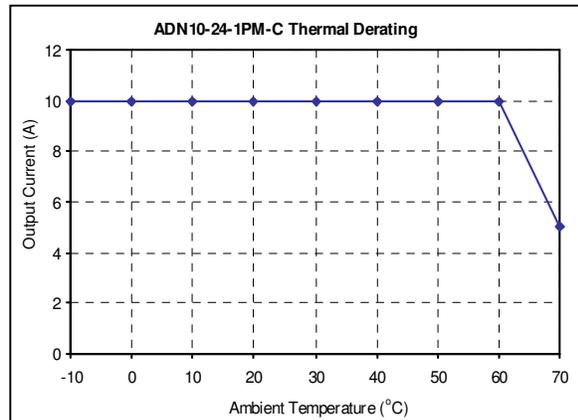


**Figure 20: ADN10-24-1PM-C Derating Curves**  
Vin = 115Vac Load: Io = 0 to 10.0A

# ADN20-24-1PM-C Performance Curves

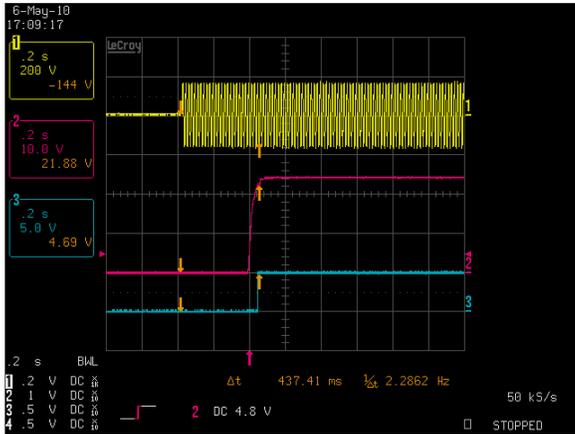


**Figure 21: ADN20-24-1PM-C Turn-on delay**

Vin = 115Vac Load: Io = 20.0A  
Ch 1: AC Mains Ch 2: Vo Ch 3: DCOK

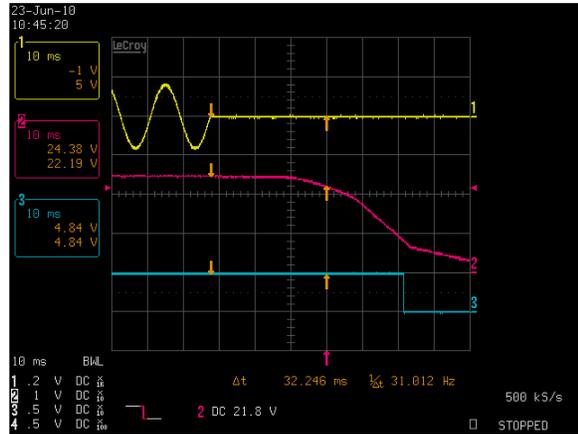


**Figure 22: ADN20-24-1PM-C Hold-up Time (time to decay)**

Vin = 115Vac Load: Io = 20.0A  
Ch 1: AC Mains Ch 2: Vo Ch 3: DCOK

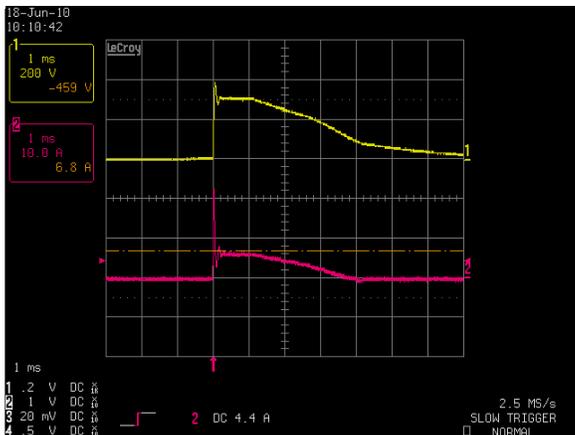


**Figure 23: ADN20-24-1PM-C Inrush Current**

Vin = 230Vac Load: Io = 0A, Turn on angle = 90 deg  
Ch 1: AC Mains Ch 2: In

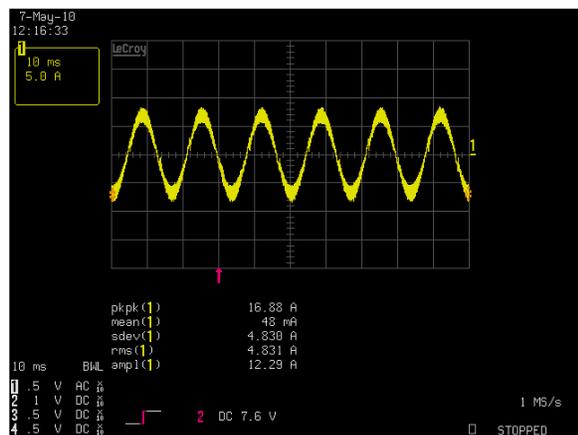


**Figure 24: ADN20-24-1PM-C Input Current Waveform**

Vin = 115Vac Load: Io = 20.0A  
Ch 1: In

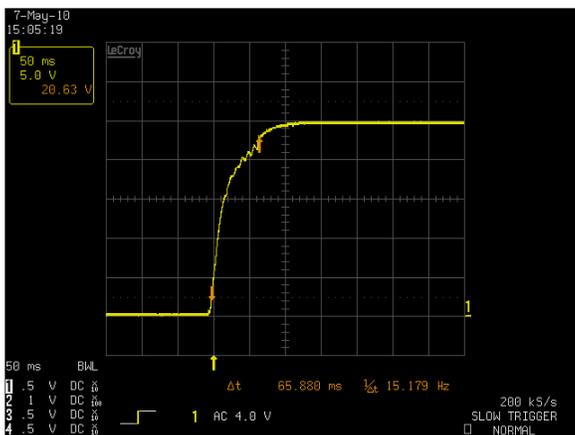

**Figure 25: ADN20-24-1PM-C Output Voltage Startup Characteristic**


Vin = 90Vac Load: Io = 20.0A, Output Capacitance = 330uF/A  
Ch 1: Vo

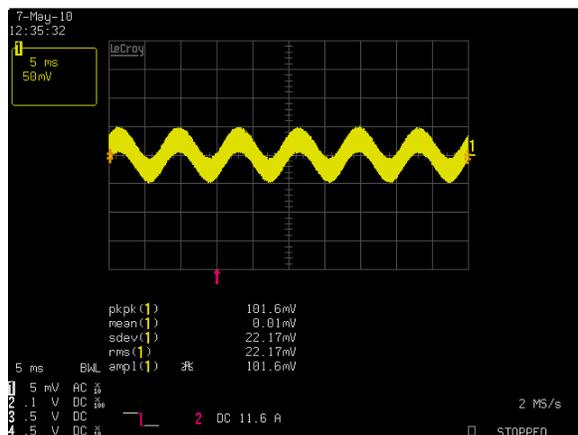


**Figure 26: ADN20-24-1PM-C Ripple and Noise Measurement**

Vin = 115Vac Load: Io = 20.0A  
Ch 1: Vo


# ADN20-24-1PM-C Performance Curves

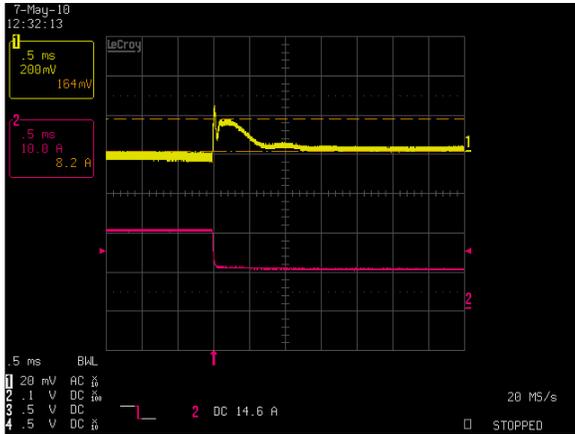


**Figure 27: ADN20-24-1PM-C Transient Response – High to Low**  
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate  
Ch 1: Vo Ch 2: Io

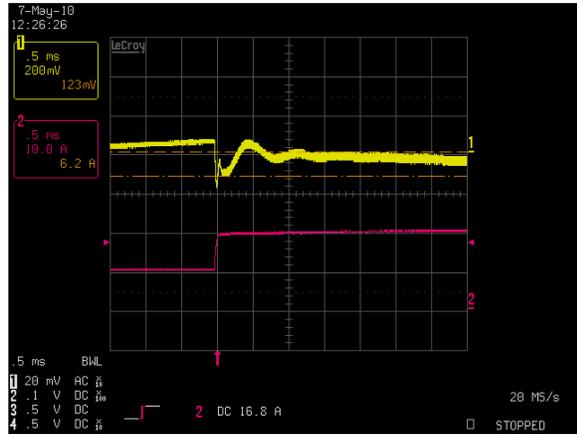

**Figure 28: ADN20-24-1PM-C Transient Response – Low to High**  
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate  
Ch 1: Vo Ch 2: Io

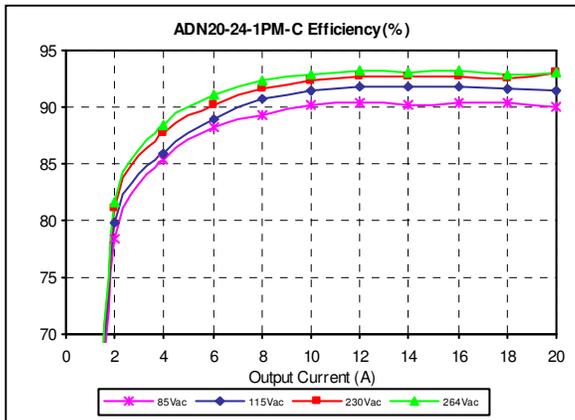

**Figure 29: ADN20-24-1PM-C Efficiency Curves @ 25 °C, Convection Cool**  
Vin = 85 to 264Vac Load: Io = 0 to 20.0A

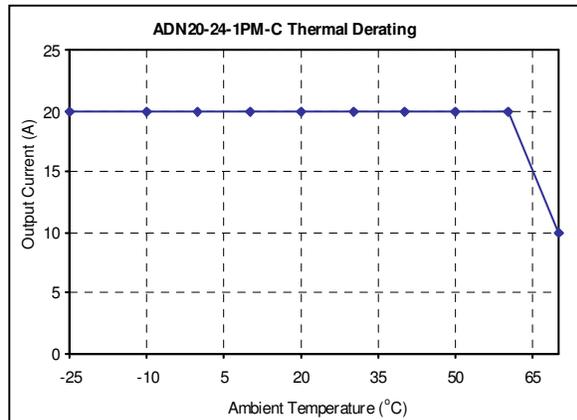

**Figure 30: ADN20-24-1PM-C Derating Curve**  
Vin = 115Vac Load: Io = 0 to 20.0A

## Protection Function Specifications


Rev.10.07.08 #2.2  
ADN-C Series  
Page 12

### Over Voltage Protection (OVP)

The power supply main Vo output will latch off during output overvoltage condition with the AC line recycled to reset the latch.


### Over Current Protection and PowerBoost™

With PowerBoost™, the ADN-C power supplies can supply a higher output current for a short period of time without the output voltage breaking down. When an overload occurs, the output current can increase up to 1.5 times its nominal rating for four seconds. If the overload lasting for longer than 4 seconds, the power supply will go into hiccup mode for protection. Refer to PowerBoost™ diagram below for details.

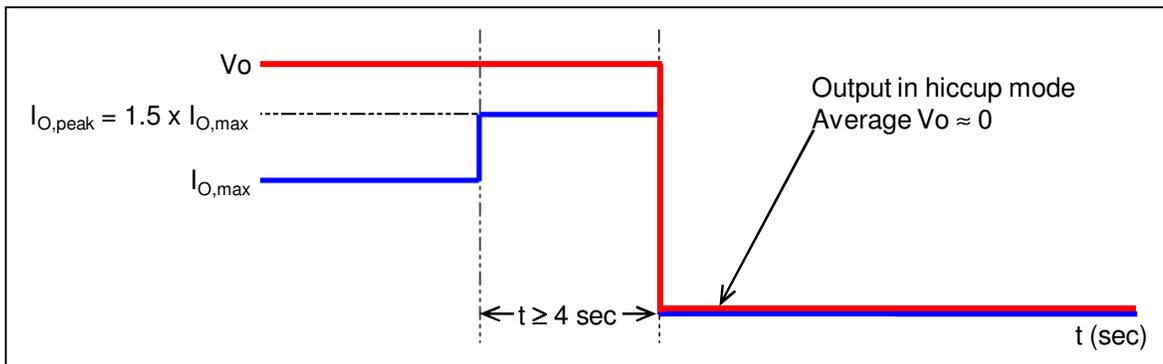

### Short Circuit Protection (SCP)





The ADN-C series power supply is protected against short circuit to its output. A short circuit is defined as 0.03-ohm resistance or less between the output terminals. When a short circuit condition occurs, the output current can reach 160% of the rated current or higher, the output will shut off immediately and goes into hiccup mode.

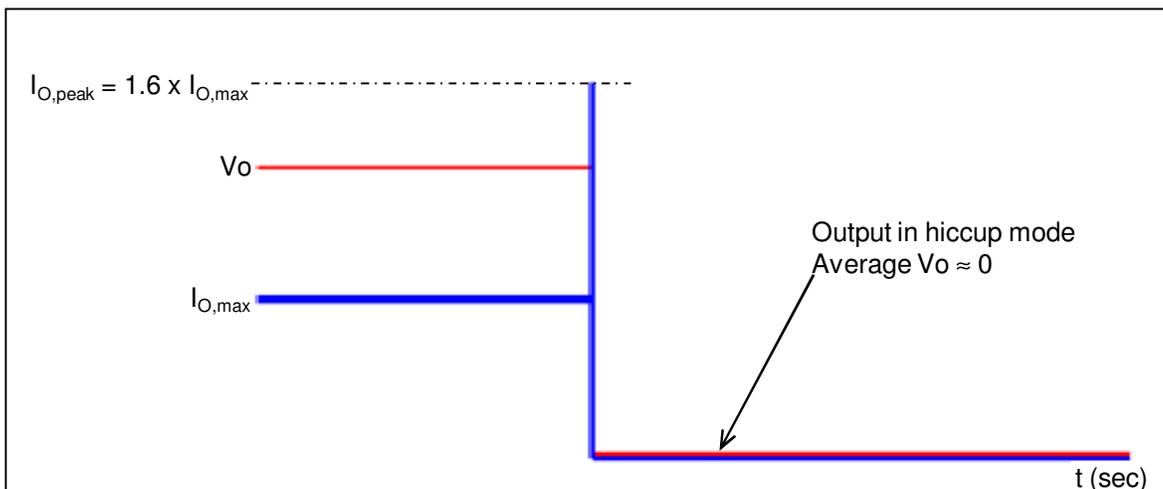

# Mechanical Specifications

## Mechanical Outlines





ADN5-24-1PM-C

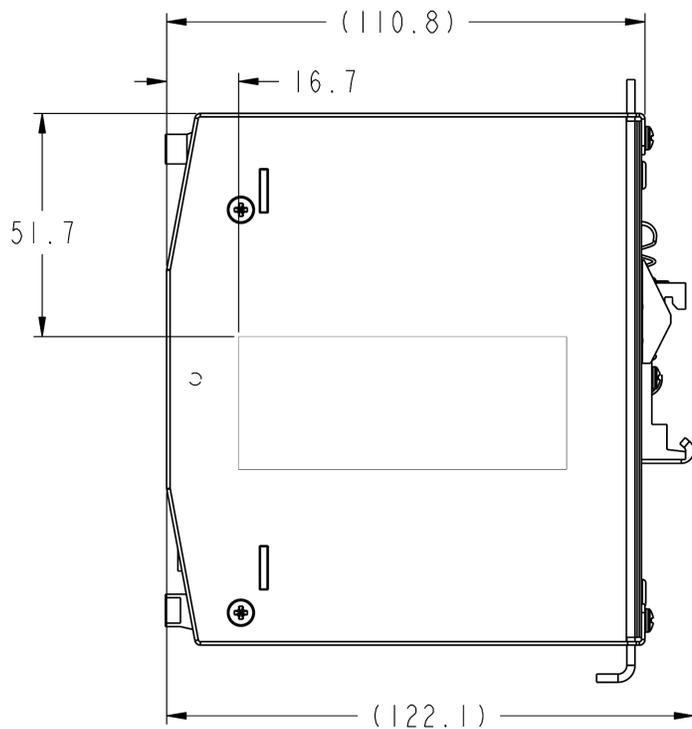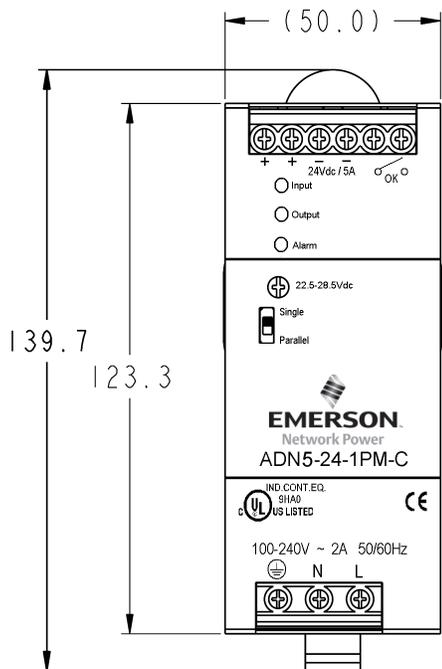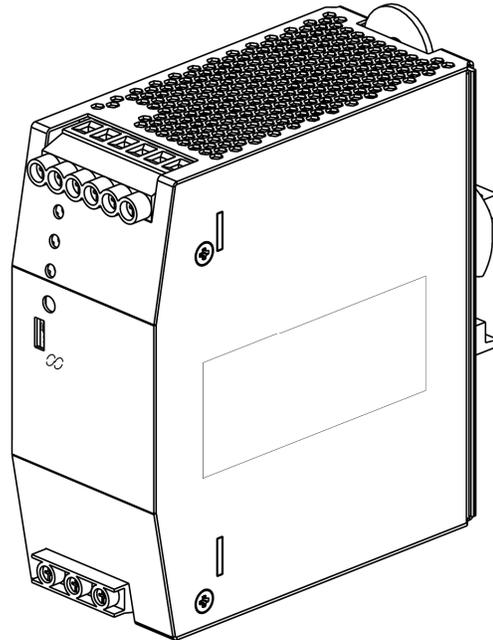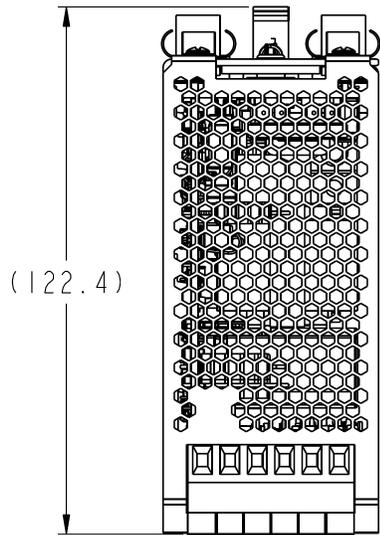

# Mechanical Outlines

ADN10-24-1PM-C





Rev.10.07.08 #2.2  
ADN-C Series  
Page 14

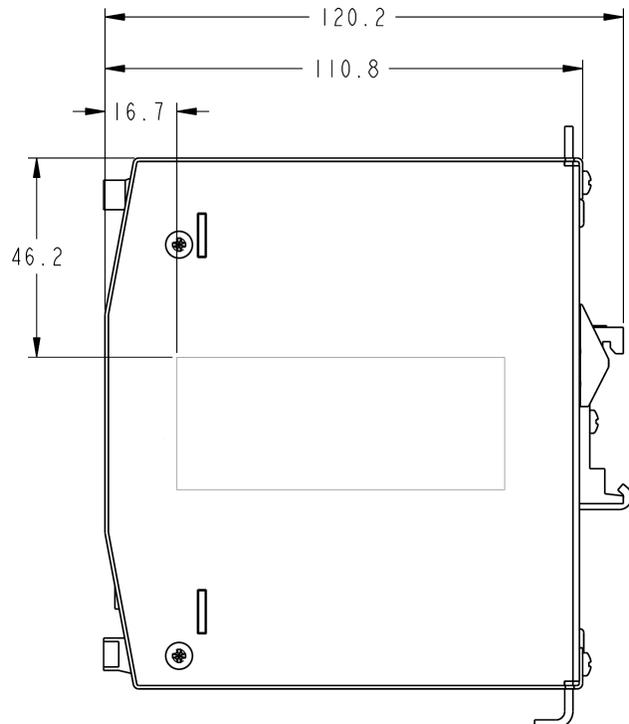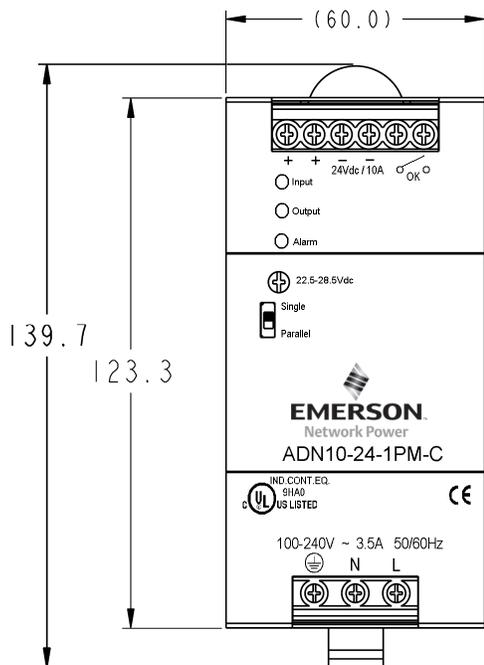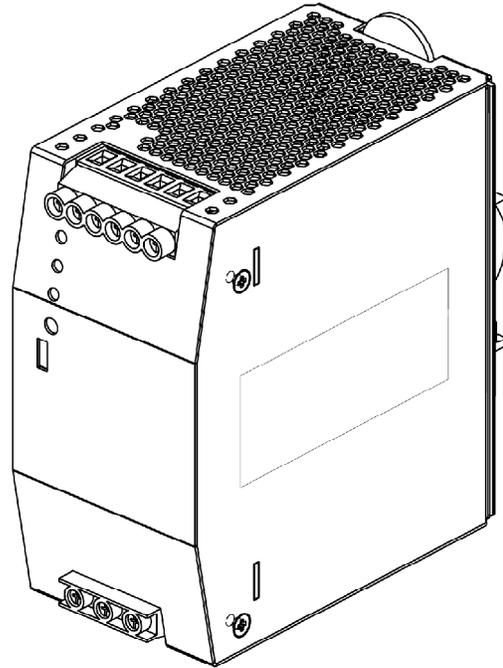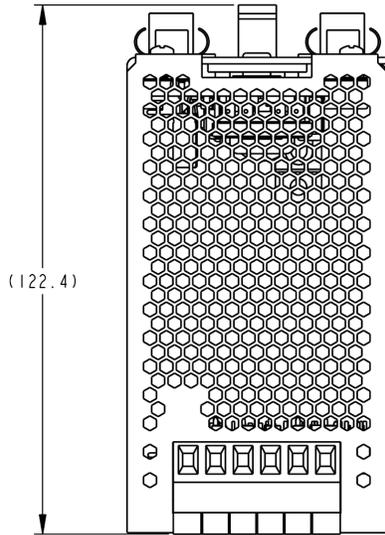

# Mechanical Outlines

ADN20-24-1PM-C


Rev.10.07.08 #2.2  
ADN-C Series  
Page 15

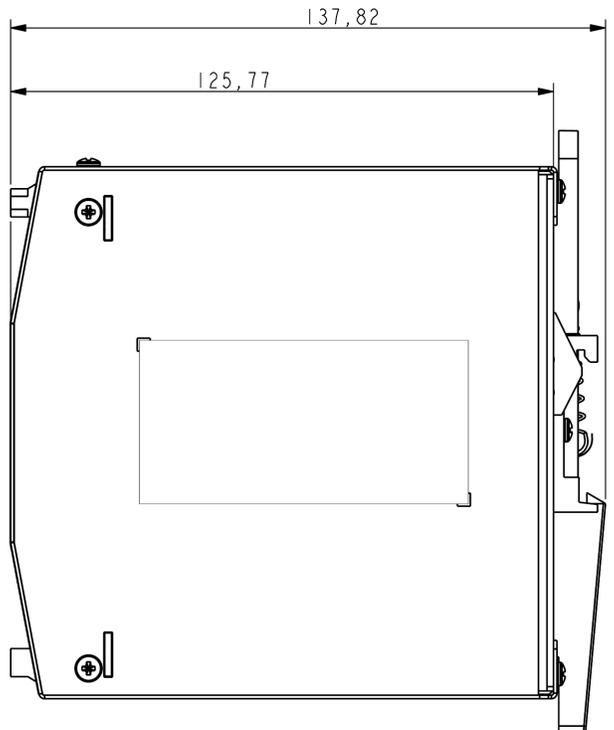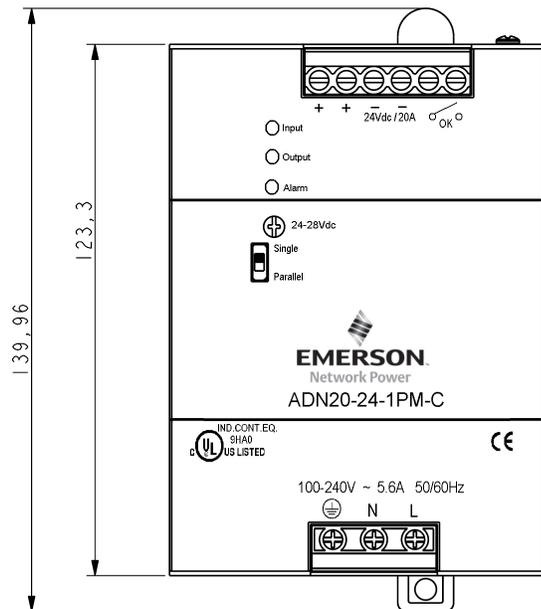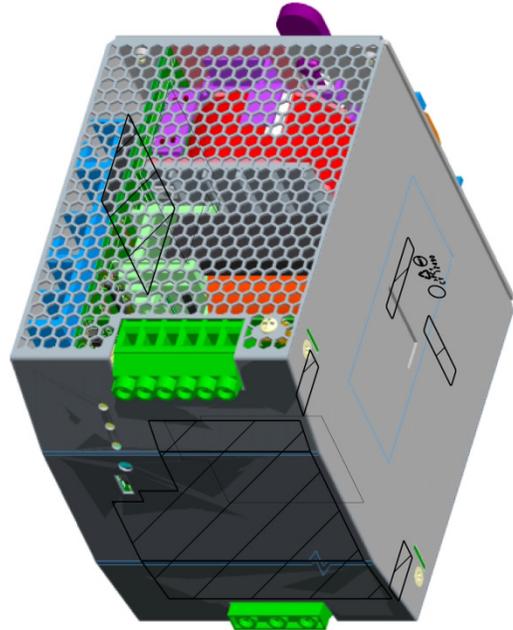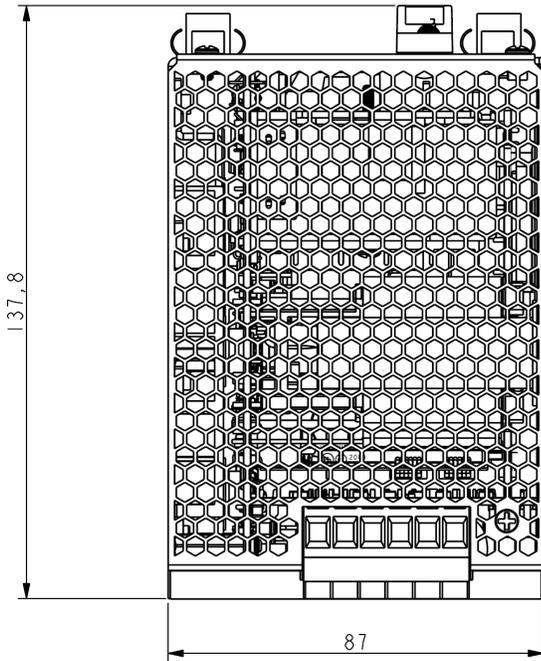

## Mounting


### DIN rail mounting (DIN TS35/7.5 or TS35/15 rail system)

1. Tilt unit slightly backwards
2. Put it onto the DIN Rail
3. Push downwards until stopped
4. Push at the lower front edge to lock
5. Shake the unit slightly to ensure that the retainer has locked

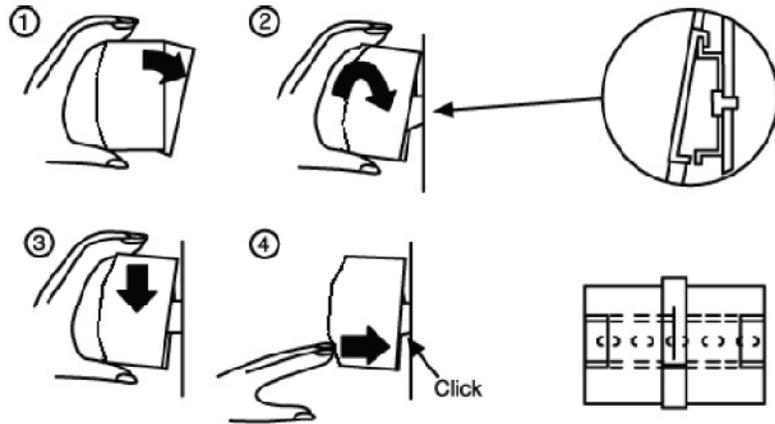




Alternative Panel Mount: Using the optional accessory, the unit can be screw mounted to a panel.

Detachment from DIN rail:

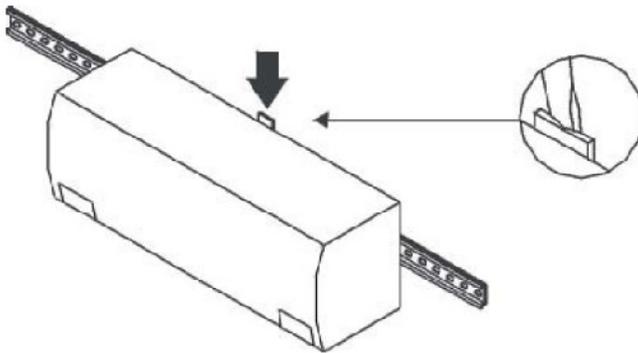

### Chassis mounting

Instead of mounting on DIN rail, a ADN-C series power supply can also be attached to chassis by using two metal brackets, which replace the existing two aluminum profiles.

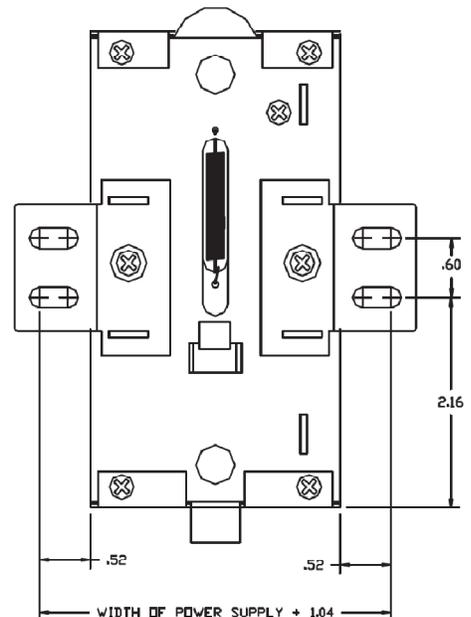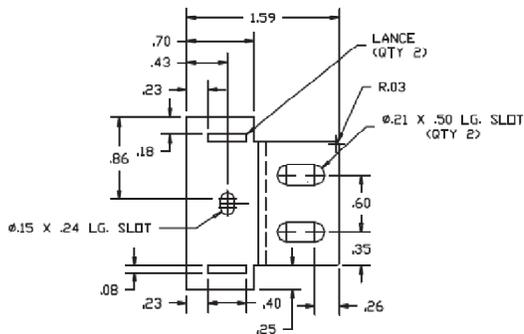

## Mounting Orientations

Rev.10.07.08 #2.2  
ADN-C Series  
Page 17


### **Vertical (Standard)**

- AC Input connector on TOP
- LED indicators face FRONT
- No derating require




### **Horizontal (Sideways mount)**

- AC Input and Output connectors on horizontal plane
- LED indicators face FRONT
- Maximum output = 50% rated output current



### **Top mount (Front side up)**


- LED indicators face UP
- Maximum output = 50% rated output current



## Mounting Space

### **Free space (minimum)**


- ADN5-24-1PM-C / ADN10-24-1PM-C - 15mm in front, 25mm above and below, 10mm left and right
- ADN20-24-1PM-C - 15mm in front, 40mm above and below, 10mm left and right

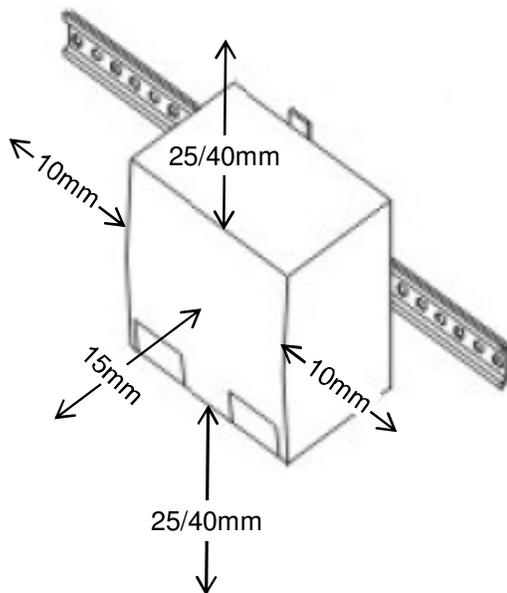


## Connector Definitions

Rev.10.07.08 #2.2  
ADN-C Series  
Page 18

### AC Input Connector

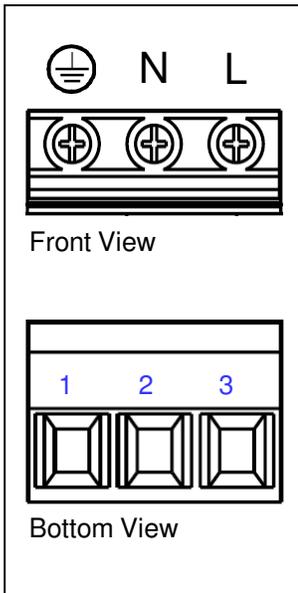

### Output Connector

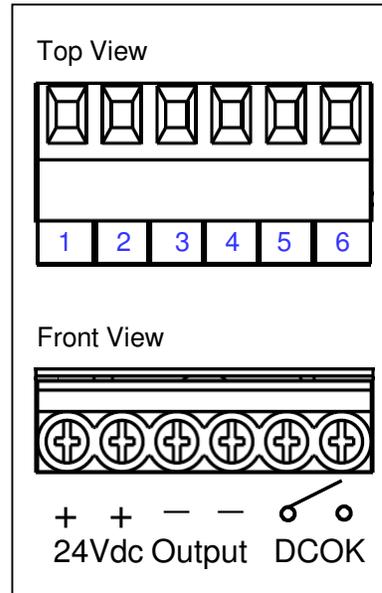

## Connector Type and Wire Sizes

Table 7. Connector type on ADN-C series

| Reference          | Description  | Wire Size   |
|--------------------|--|---|
| Input AC Connector | 3-Pole, 9.52mm Pitch, Euro Type, Cage Clamp Terminal Block | 10 to 16 AWG (1.5 to 6 mm <sup>2</sup> ) solid wire |
| Output Connector   | 6-Pole, 6.35mm Pitch, Euro Type, Cage Clamp Terminal Block | 10 to 16 AWG (1.5 to 6 mm <sup>2</sup> ) solid wire |

### AC Input Connector

These terminals supply the AC Mains to the ADN-C series power supply.

- Pin 1 - Earth Ground (Safety Ground)
- Pin 2 - Neutral
- Pin 3 - Line

## **Output Connector**

Rev.10.07.08 #2.2  
ADN-C Series  
Page 19

These terminals provide the main output for the ADN-C power supply and the DCOK contact output.

Pin 1 & 2 - (+) 24V Output (Vo)

Pin 3 & 4 - (-) 24V Output (Vo Return)

Pin 5 & 6 - DCOK

The Vo and the Vo Return terminals are the positive and negative rails, respectively of the main output of the ADN-C series power supply. The Main Output is electrically isolated from the Earth Ground and can be operated as a positive or negative output.

### **DCOK – (Pin 5 and Pin 6)**

DCOK is a dry relay contact output capable of switching up to a maximum of 0.2A / 50Vdc


Relay contact **close** – DC OK – Output 24V available

Relay contact **open** – DC Fail – Output 24V failed


## Switches and Potentiometer Definitions

Rev.10.07.08 #2.2  
ADN-C Series  
Page 20

**Vo adjustment** - The output of the ADN-C series power supply can be adjusted from its nominal output voltage via the front trim pot screw. Clockwise rotation will increase the output voltage while counterclockwise rotation will decrease the output voltage.

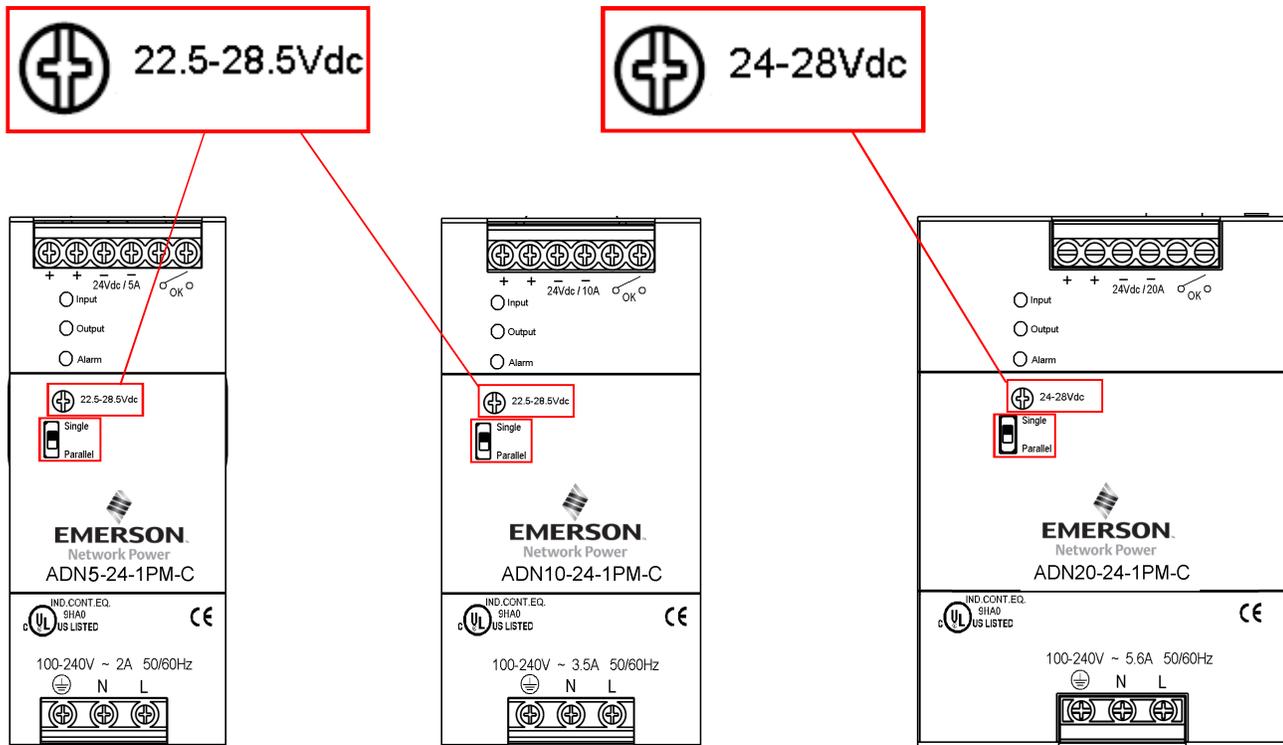


**Single / Parallel switch** - The outputs of two or more of ADN-C series power supplies can be connected in parallel to increase the total current capability. When operate the ADN-C power supplies in parallel, the Single / Parallel switch on each of the ADN-C power supply should be placed in the parallel position. Units will not be damaged by parallel operation (regardless of switch position setting)



## LED Indicator Definitions

Rev.10.07.08 #2.2  
ADN-C Series  
Page 21

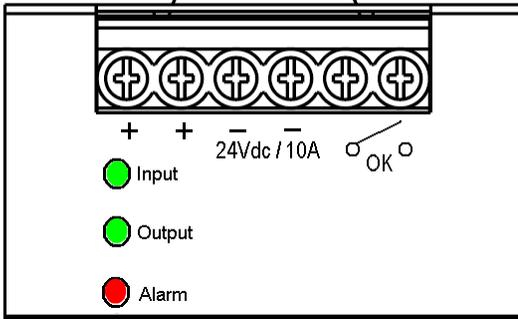

Three user-friendly LEDs for status and diagnostics  
Shows status of input power, output power and alarm condition  
Valuable troubleshooting aid to reduce system downtime

| LED Diagnostics |       |            |        |       |           |          |       |         |
|-----------------|-------|------------|--------|-------|-----------|----------|-------|---------|
| LED             | OK    | Loss of AC | Low AC | No DC | High Load | Overload | Hot   | Too Hot |
| ● Input         | Green | ---        | Amber  | Green | Green     | Green    | Green | Green   |
| ● Output        | Green | ---        | Green  | ---   | Amber     | Amber    | Green | ---     |
| ● Alarm         | ---   | ---        | ---    | Red   | Amber     | Red      | Amber | Amber   |

**Weight**

|                |                    |
|----------------|--------------------|
| ADN5-24-1PM-C  | - 1.65 lb (0.75kg) |
| ADN10-24-1PM-C | - 1.98 lb (0.90kg) |
| ADN20-24-1PM-C | - 2.60 lb (1.20kg) |

## **EMC Immunity**

The ADN-C Series power supply is designed to meet the following EMC immunity specifications

Table 5. Environmental Specifications:

| Document  | Description   |
|---|---|
| EMC Emission:   |   |
| EN55011, Class B  | Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radiofrequency equipment |
| EN55022, Radiated and Conducted including Annex A       | Information technology equipment. Radio disturbance characteristics. Limits and methods of measurement                                      |
| EN61000-3-2   | EMC limits for harmonic current emissions for equipment with input current up to and including 16A per phase                                |
| EN61000-6-3: 2001                                       | EMC Emission standard for residential, commercial and light industrial environments   |
| EMC Immunity:   |   |
| EN61000-6-1: 2001                                       | Immunity Standard for Residential, Commercial and Light-Industrial Environments   |
| EN61000-6-2: 2001                                       | Immunity Standard for Industrial Environments   |
| EN61000-4-2 Level 4                                     | ESD, Electrostatic Discharge  |
| EN61000-4-3 Level 3                                     | Radiated, radio-frequency, electromagnetic field immunity test  |
| EN61000-4-4 Level 4 input<br>EN61000-4-4 Level 3 output | Electrical Fast Transient/Burst Immunity Test   |
| EN61000-4-5 Isolation Class 4                           | Surge immunity test   |
| EN61000-4-6 Level 3                                     | Immunity to conducted disturbances, induced by radio-frequency fields   |
| EN61000-4-11  | EMC standard is applicable to power supplies whose input current ( $I_{IN}$ ) is below 16A  |
| IEC 61000-4-34  | Voltage dip immunity standard   |
| SEMI F47 Sag Immunity                                   |   |
| General Protection Safety:                              |   |
| IEC536  | Protection Class 1  |
| IEC60529  | IP20  |
| IEC60950-1  | SELV  |

## **Safety Certifications**

Rev.10.07.08 #2.2  
ADN-C Series  
Page 24

The ADN-C series is suitable for use in Class I, Division 2, Groups A, B, C, and D hazardous locations or non-hazardous locations only.

The ADN-C series has been designed in accordance with following safety standards. Appropriate safety certificates and approvals are available to download from our website [www.powerconversion.com](http://www.powerconversion.com).

Table 6. Safety Certifications for ADN-C series power supply

| <b>Document</b>           | <b>Description</b>   |
|---------------------------|--|
| UL508 Listed, cULus       | Standard for Industrial Control Equipment  |
| UL60950-1, cRUus          | Safety of information Technology Equipment   |
| IEC/EN60950-1             | Safety of information Technology Equipment   |
| ATEX Certification        | Class 1, Division 2 hazardous location, Groups A, B, C, D w/ T3A temp class up to 40°C Ambient |
| CB Certificate and Report | (All CENELEC Countries)  |
| CE Mark                   | LVD (73/23 & 2004/108/EC)<br>EMC (89/336 & 93/68/EEC)  |

## Operating and Non-Operating Conditions

The ADN-C Series power supply is designed to meet all of its specifications during any combination of operating ambient conditions and after exposure to any combination of non-operating ambient conditions specified in this section.


Table 4. Maximum Ambient Conditions:

| Parameter                     | Model                  | Symbol    | Min   | Typ                                       | Max  | Unit |
|-------------------------------|------------------------|-----------|---|---|--|------|
| Ambient Operating Temperature | ADN5<br>ADN10<br>ADN20 | $T_A$     | -10<br>-10<br>-25   | -<br>-<br>-                               | +70 <sup>1</sup><br>+70 <sup>1</sup><br>+70 <sup>1</sup> | °C   |
| Storage Temperature           | All                    | $T_{STG}$ | -25   | -   | +85  | °C   |
| Shock                         |                        |           | Accordance to IEC 68-2-27   |   |  |      |
| Operating                     | ADN5<br>ADN10<br>ADN20 |           | 3g peak, 11 milliseconds half-sine pulse<br>15g peak, 11 milliseconds per IEC 60068-2-6<br>3g peak, 11 milliseconds half-sine pulse |   |  |      |
| Vibration                     |                        |           | Accordance to Vibration (Sinusoidal) per IEC 68-2-6   |   |  |      |
| Operating                     | All                    |           | 0.15 gravity (g) peak, 5–500 Hz (swept sine); 5–500 Hz (random); vertical axis only   |   |  |      |
| MTBF                          | Convection             | 40 °C     | ADN5<br>ADN10<br>ADN20  | >550,000hrs<br>>550,000hrs<br>>450,000hrs |  |      |

Note 1 - Derate each output at 5% per degree C from 60°C to 70°C


## Output Ripple and Noise Measurement

The setup outlined in the diagram below has been used for output voltage ripple and noise measurements on the ADN Series. When measuring output ripple and noise, The scope is connected to the circuit via an RGU58-50Ω cable. One side is BNC and the other is soldered to the PCB. Shield is grounded. Oscilloscope should be set to 50Ω input with 20 MHz bandwidth for this measurement.

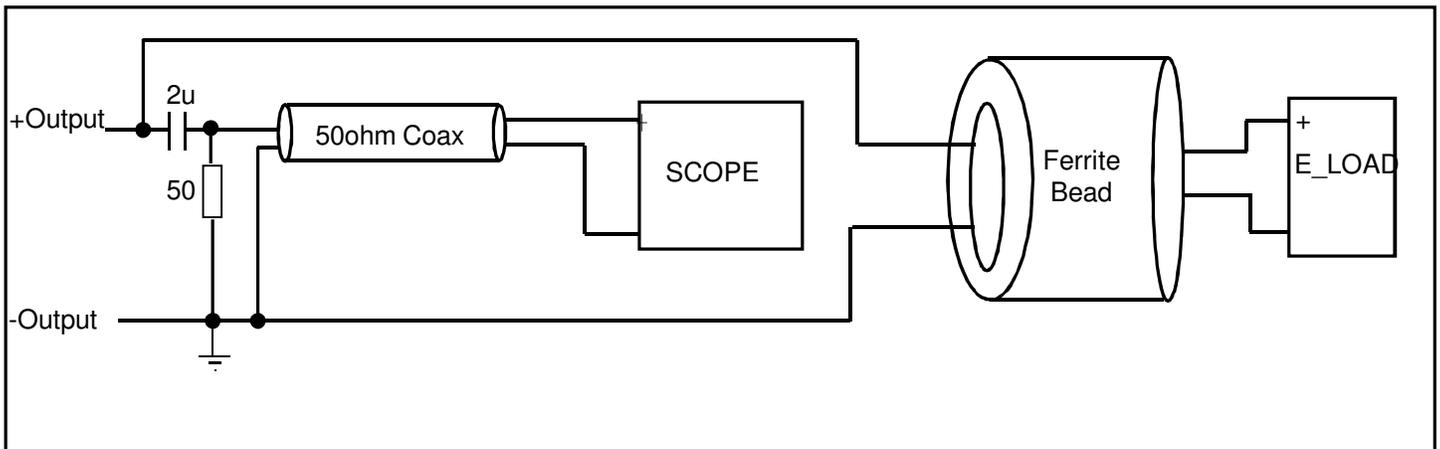

## Common-Mode Noise

The setup outlined in the diagram below has been used for output voltage common-mode noise measurements on the ADN Series. The measurements are made individually (+) to GND or (-) to GND. The scope is connected to the circuit via an RGU58-50Ω cable. One side is BNC and the other is soldered to the PCB. Shield is grounded. Oscilloscope should be set to 50Ω input with 20 MHz bandwidth for this measurement.

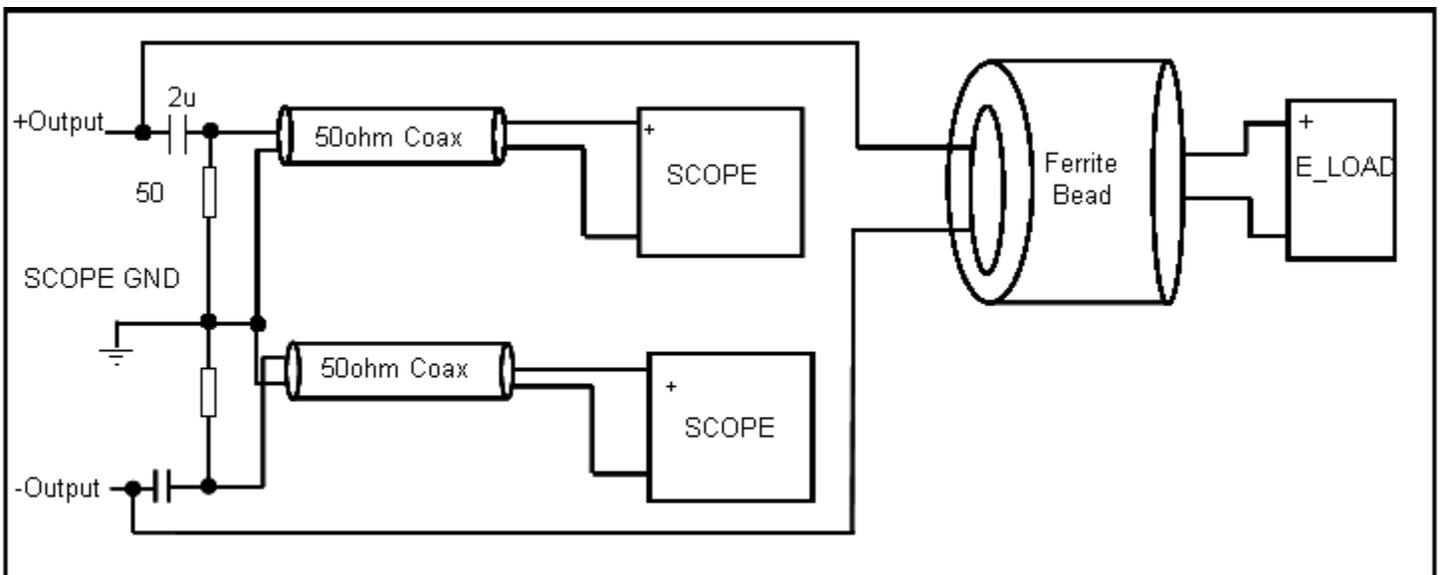

### **Americas**

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 (760) 930 4600  
Facsimile: +1 (760) 930 0698

### **Europe (UK)**

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### **Asia (HK)**

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

**[www.powerconversion.com](http://www.powerconversion.com)**

**[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)**

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

### **Emerson Network Power.**

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

### **EmersonNetworkPower.Com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2008 Emerson Electric Co.