


DIP6-pin type featuring low on-resistance with 200V/400V load voltage

PhotoMOS®

RF 1 Form A

Low on-resistance (AQV22ON)

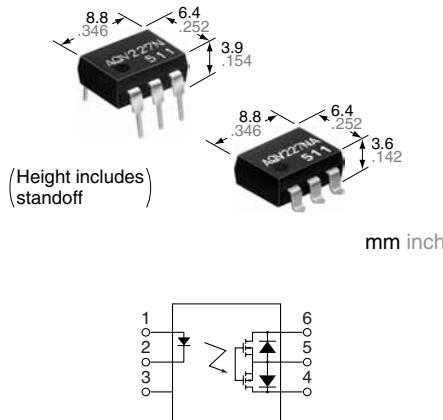

FEATURES

1. Low output capacitance and high response speed

The capacitance between output terminals is small; typ. 10pF. This enables a fast operation speed of typ. 0.2ms.

2. High sensitivity and low on-resistance

Max. 0.1 A of load current can be controlled with input current of 5 mA. The on resistance is less than our conventional models.

3. Low-level off state leakage current of typ. 0.03nA (AQV227N)

4. Controls low-level analog signals

TYPICAL APPLICATIONS

- Measuring instruments
- Communication equipment
- Computers
- Robots

RoHS compliant

TYPES

	Output rating*		Package	Part No.			Packing quantity	
				Through hole terminal		Surface-mount terminal		
	Load voltage	Load current		Tube packing style		Tape and reel packing style		
AC/DC dual use	200 V	70 mA	DIP6-pin	AQV227N	AQV227NA	AQV227NAX	AQV227NAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.
	400 V	50 mA		AQV224N	AQV224NA	AQV224NAX	AQV224NAZ	

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV227N(A)	AQV224N(A)	Remarks
Input	LED forward current	I _F	A	50 mA		
	LED reverse voltage	V _R		5 V		
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW		
Output	Load voltage (peak AC)	V _L	B	200 V	400 V	
	Continuous load current	I _L		0.07 A	0.05 A	A connection: Peak AC, DC B, C connection: DC
	Peak load current	I _{peak}		0.08 A	0.06 A	
	Power dissipation	P _{out}	C	0.10 A	0.08 A	
Total power dissipation		P _T	C	0.21 A	0.15 A	A connection: 100 ms (1 shot), V _L = DC
I/O isolation voltage		V _{iso}		360 mW		
Temperature limits		T _{opr}		410 mW		
Storage	T _{stg}	1,500 V AC			Non-condensing at low temperatures	
				-40°C to +85°C -40°F to +185°F		
				-40°C to +100°C -40°F to +212°F		

RF 1 Form A Low on-resistance (AQV22ON)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV227N(A)	AQV224N(A)	Remarks
Input	LED operate current	Typical	I_{Fon}	—	0.9 mA		
		Maximum			3.0 mA		$I_L = \text{Max.}$
	LED turn off current	Minimum	I_{Foff}	—	0.4 mA		
		Typical			0.85 mA		$I_L = \text{Max.}$
Output	LED dropout voltage	Typical	V_F	—	1.25 V (1.14 V at $I_F = 5 \text{ mA}$)		$I_F = 50 \text{ mA}$
		Maximum			1.5 V		
	On resistance	Typical	R_{on}	A	30 Ω	70 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum			50 Ω	100 Ω	
		Typical	R_{on}	B	16 Ω	55 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum			25 Ω	70 Ω	
	Output capacitance	Typical	C_{out}	—	8 Ω	28 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum			12.5 Ω	35 Ω	
Transfer characteristics	Off state leakage current	Typical	I_{Leak}	—	10 pF		$I_F = 0$ $V_B = 0$ $f = 1 \text{ MHz}$
		Maximum			15 pF		
	Turn on time*	Typical	T_{on}	—	0.03 nA	0.09 nA	$I_F = 0$ $V_L = \text{Max.}$
		Maximum			10 nA		
	Initial I/O isolation resistance		R_{iso}	—	1,000 MΩ		500 V DC

*Turn on/Turn off time

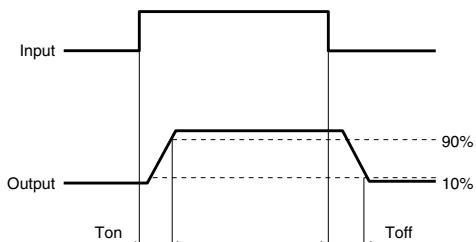

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I_F	5	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.


RF 1 Form A Low on-resistance (AQV22ON)

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

Type of connection: A




2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




3. Turn on time vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

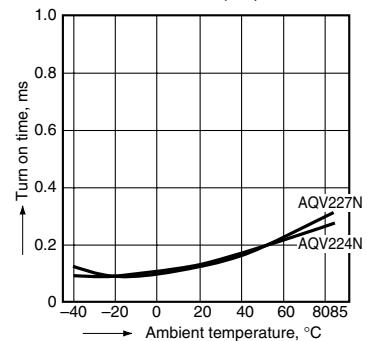


4. Turn off time vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




5. LED operate current vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)




6. LED turn off current vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

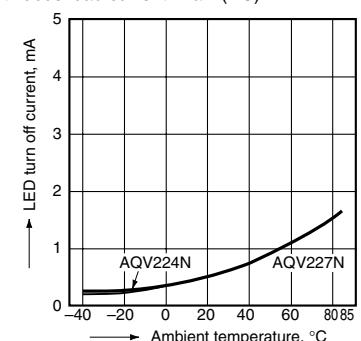


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

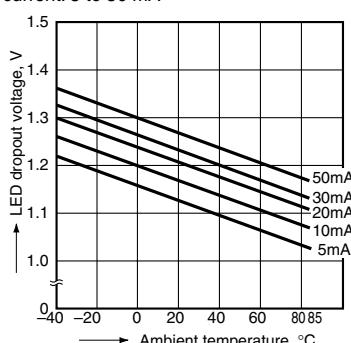


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




9. Off state leakage current

Sample: AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

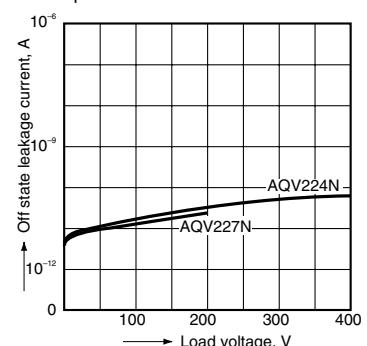


RF 1 Form A Low on-resistance (AQV22ON)


10. Turn on time vs. LED forward current characteristics
 Sample: AQV227N, AQV224N;
 Measured portion: between terminals 4 and 6;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC);
 Ambient temperature: 25°C 77°F

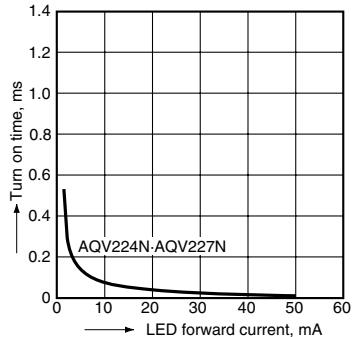


11. Turn off time vs. LED forward current characteristics
 Sample: AQV227N, AQV224N;
 Measured portion: between terminals 4 and 6;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC);
 Ambient temperature: 25°C 77°F

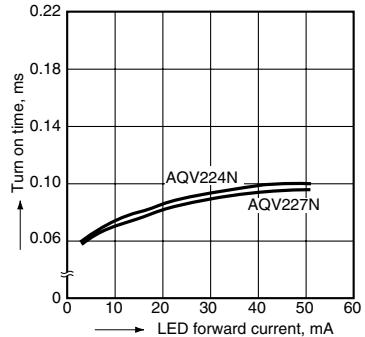

12. Output capacitance vs. applied voltage characteristics
 Measured portion: between terminals 4 and 6;
 Frequency: 1 MHz, 30 mVrms;
 Ambient temperature: 25°C 77°F



13. Isolation characteristics
 (50 Ω impedance)
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

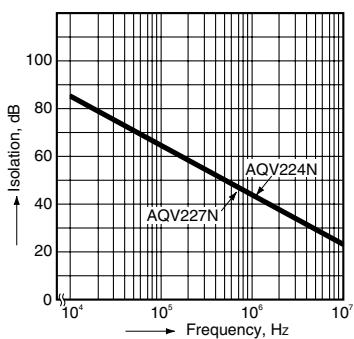

14. Insertion loss characteristics
 (50 Ω impedance)
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

