



**Miniature SOP4-pin type
with high capacity
up to 1.6A**

**PhotoMOS®
GU SOP 1 Form A High Capacity
(AQY2)**



mm inch



FEATURES

1. Continuous load current: Max. 1.6A high capacity (AQY211G2S)
2. Low on resistance: typical 0.1 Ω (AQY211G2S)
3. Broad lineup of high capacity types

TYPICAL APPLICATIONS

- Measuring instruments
- Security and disaster-preventing system: use in I/O for alarm and security devices, etc.

* Please refer to our website for the latest information regarding compliance to standards.

RoHS compliant

TYPES

AC/DC dual use	Output rating**		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style		Tape and reel packing style		Tube
	40V	1.6A		AQY211G2S	AQY211G2SX	AQY211G2SZ	AQY212G2S	
New	60V	1.25A	SOP4-pin	AQY212G2S	AQY212G2SX	AQY212G2SZ	AQY212GS	1 tube contains: 100 pcs. 1 batch contains: 2,000 pcs.
		1.0A		AQY212GS	AQY212GSX	AQY212GSZ		1,000 pcs.

** Indicate the peak AC and DC values.

Note: For space reasons, the three initial letters of the part number "AQY", the surface mount terminal shape indicator "S" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number AQY212G2SX is 212G2.)

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQY211G2S	AQY212G2S	AQY212GS	Remarks
Input	LED forward current	I _F		50 mA		
	LED reverse voltage	V _R		5 V		
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW		
Output	Load voltage (peak AC)	V _L	40 V	60 V		
	Continuous load current	I _L	1.6 A	1.25 A	1.0 A	Peak AC, DC
	Peak load current	I _{peak}	4 A		3 A	100ms (1 shot), V _L = DC
	Power dissipation	P _{out}		400 mW		
Total power dissipation		P _T		450 mW		
I/O isolation voltage		V _{iso}		1,500 V AC		
Temperature limits	Operating	T _{opr}		−40°C to +85°C	−40°F to +185°F	Non-condensing at low temperatures
	Storage	T _{stg}		−40°C to +100°C	−40°F to +212°F	

GU SOP 1 Form A High Capacity (AQY2)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY211G2S	AQY212G2S	AQY212GS	Condition
Input	LED operate current	I _{Fon}	Typical 0.9 mA	1.1 mA		I _L = 100mA
	Maximum			3 mA		
Input	LED turn off current	I _{loff}	Minimum 0.2 mA	0.3 mA		I _L = 100mA
	Typical 0.8 mA			1.0 mA		
Input	LED dropout voltage	V _F		1.32 V (1.14 V at I _F = 5 mA)		I _F = 50 mA
	Maximum 1.5 V					
Output	On resistance	R _{on}	Typical 0.1 Ω	0.2 Ω	0.34 Ω	I _F = 5 mA
	Maximum		0.15 Ω	0.5 Ω	0.7 Ω	I _L = Max. Within 1 s on time
Off state leakage current	I _{Leak}		1 μA		I _F = 0 mA V _L = Max.	
Transfer characteristics	Turn on time*	T _{on}	Typical 1.0 ms	1.3 ms		I _F = 5 mA
	Maximum		3.0 ms	5.0 ms		I _L = 100 mA V _L = 10 V
Turn off time*	T _{off}	Typical 0.12 ms	0.1 ms	0.5 ms	I _F = 5 mA I _L = 100 mA V _L = 10 V	
		Maximum				
I/O capacitance	C _{iso}	Typical 0.8 pF	1.5 pF		f = 1 MHz V _B = 0 V	
		Maximum				
Initial I/O isolation resistance	R _{iso}	Minimum	1,000 MΩ		500 V DC	
Max. switching frequency	—	Maximum	10 times/s	5 times/s	—	I _F = 5 mA duty = 50% V _L = Max. I _L = Max.

*Turn on/Turn off time

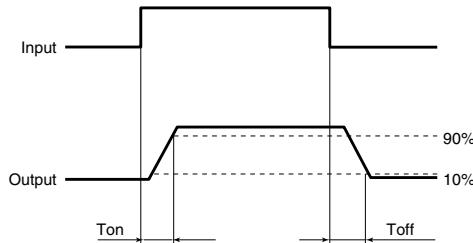

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5 to 10	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

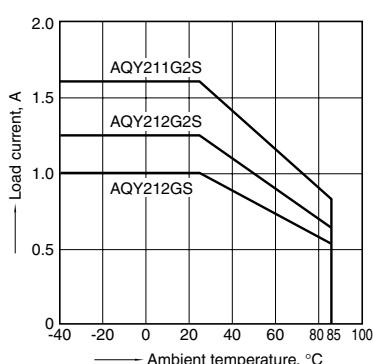


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max.(DC)

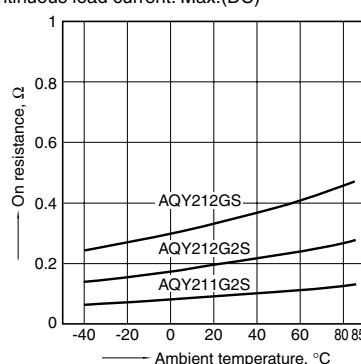

3. Turn on time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

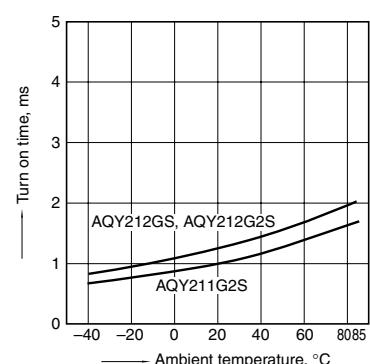

GU SOP 1 Form A High Capacity (AQY2)


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

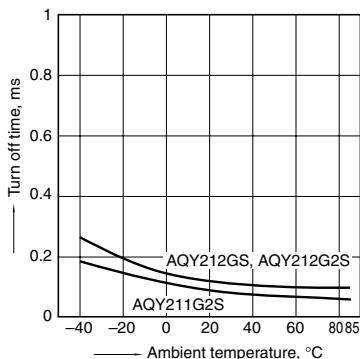


5. LED operate current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100mA (DC)

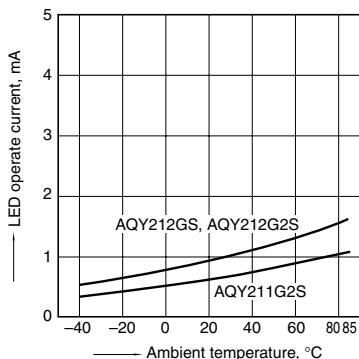


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100mA (DC)

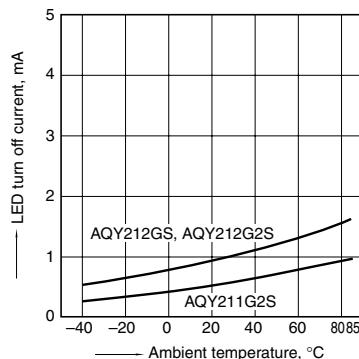


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

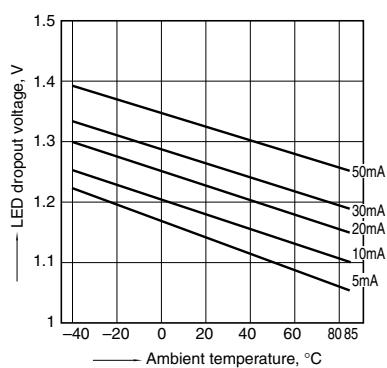


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F

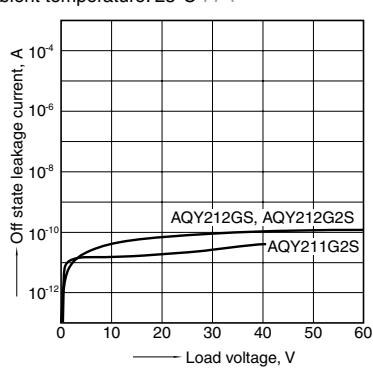


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

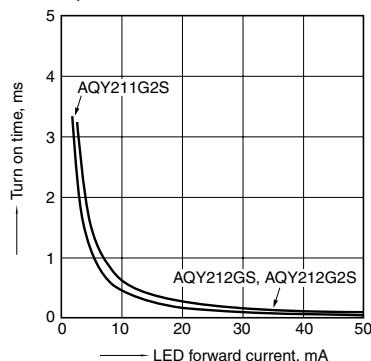


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

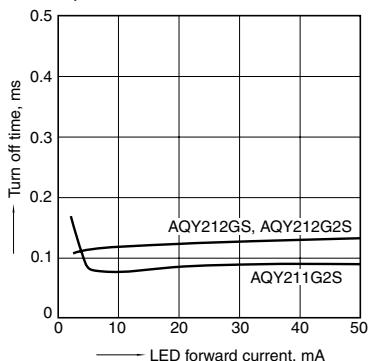

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

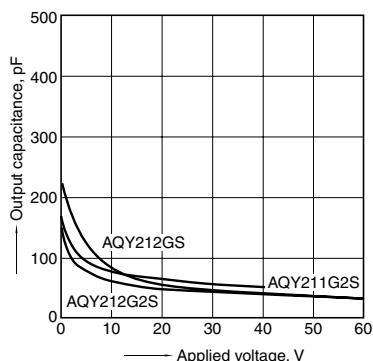

13. Max. switching frequency vs. load voltage and load current

LED current: 5 mA
Ambient temperature: 25°C 77°F

