



NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

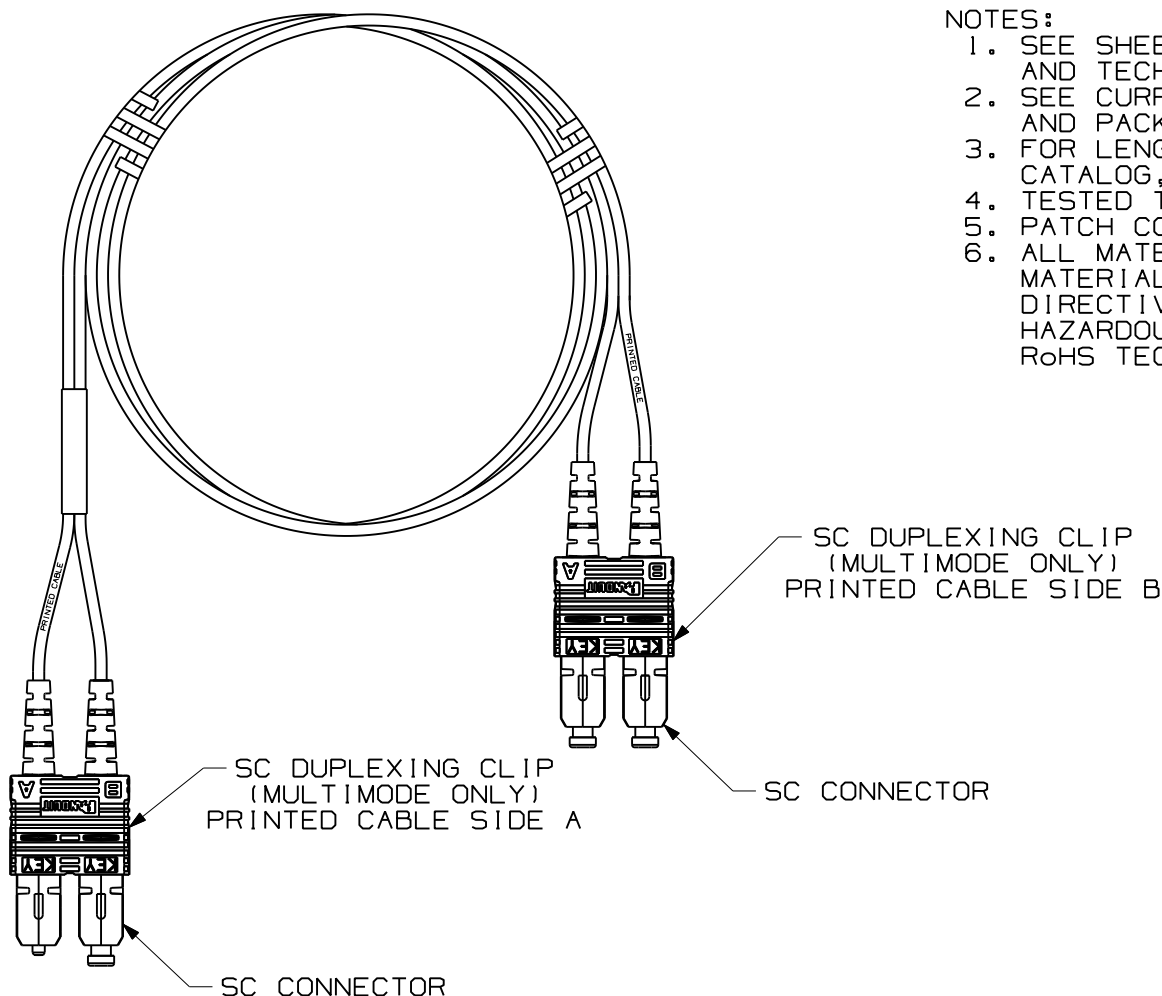

												NETKEY FIBER OPTIC PATCH CORD DUPLEX SC TO SC CONFIGURATION CUSTOMER DRAWING			
													 TINLEY PARK, ILL 60477		
												 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES		
												DRAWING FILENAME M01302CS_DC/00A	SCALE NONE		
												DRAWN BY EFK	MATERIAL	PART NO. NKF•GRO2S-SM•• NKF•GLO2S-SM••	
												DATE 12-14-09		DRAWING NO. 01302-53 SHEET 1 OF 2	SIZE A
												CHK'D			
REV	DATE	BY	CHK	DESCRIPTION		ECN	R	CUST	SUP	OTH					
R	12-14-09	EFK		RELEASED TO PRODUCTION		01302-53									

