

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


|                                                |                                                                                                                                                |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                       | High Conductivity Seamless Copper Tube                                                                                                         |
| Plating                                        | Electro-Tin                                                                                                                                    |
| Wire Size                                      | 4 STR/FLEX (ALL), 3 & 5 FLEX*                                                                                                                  |
| Wire Type                                      | Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive (*Locomotive only)                                                      |
| Wire Strip Length                              | 5/8 in.                                                                                                                                        |
| Stud Size                                      | 1/4 in.                                                                                                                                        |
| UL Listed Wire Connector                       | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating                          | 90° C                                                                                                                                          |
| C.S.A Certified Wire Connector                 | Yes                                                                                                                                            |
| Panduit Color Code on Barrel                   | GRAY                                                                                                                                           |
| Panduit Die Index No. on Barrel                | P29                                                                                                                                            |
| Alternate Industry Die Index No. ( ) on Barrel | (8)                                                                                                                                            |



CERTIFIED



LISTED  
Wire Connector

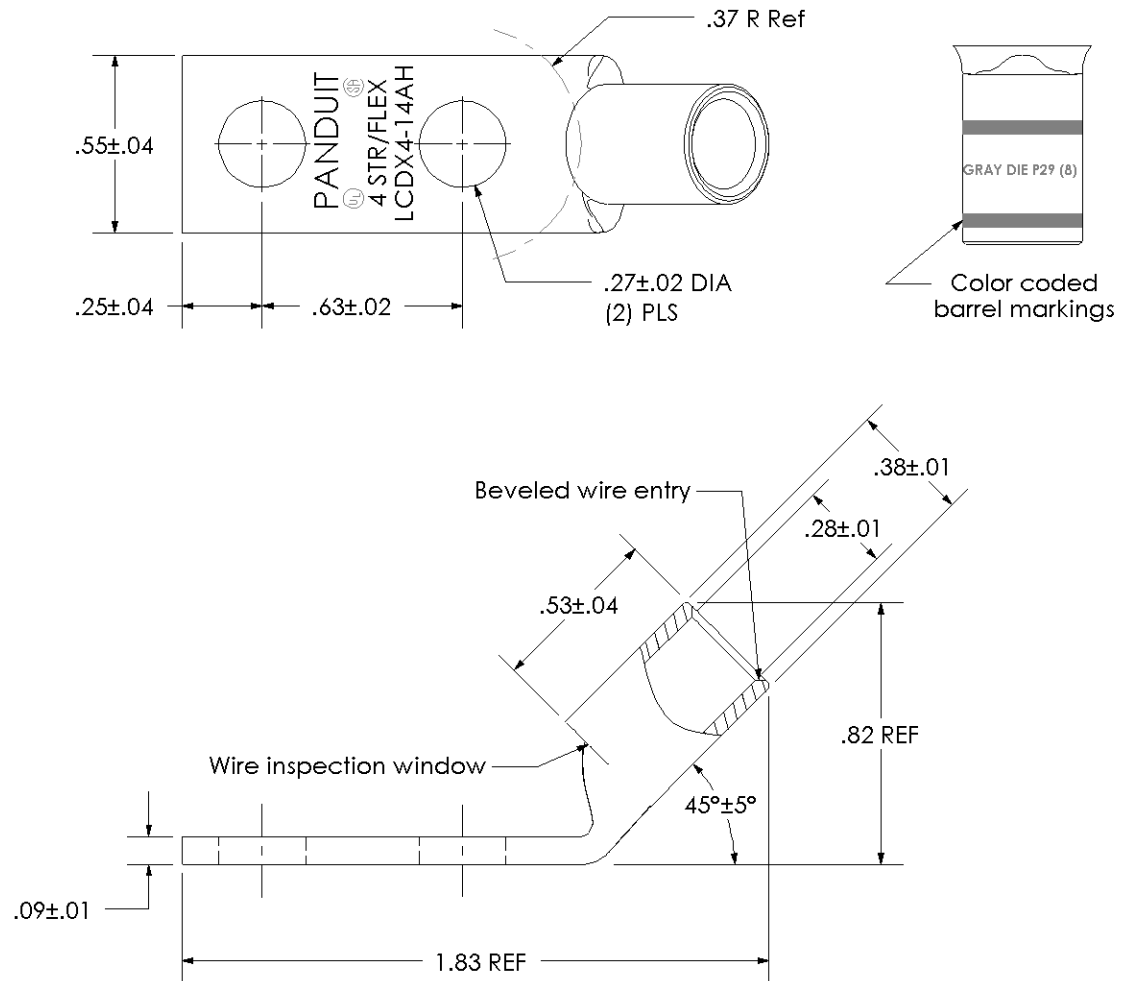

| 01  | 3/04 | KLFU | TLCO | WIRE SIZE WAS: 4 STR/FLEX<br>ADDED 3 & 5 FLEX, LOCOMOTIVE ONLY * NOTE | 11610 |  |
|-----|------|------|------|-----------------------------------------------------------------------|-------|--|
| REV | DATE | BY   | CHK  | DESCRIPTION                                                           | ECN   |  |

**PANDUIT CORP. TINLEY PARK, ILLINOIS**

LCDX4-14AH-L  
Copper Lug - Two-Hole, Standard Flex Barrel, 45° Angle Tongue

SCALE N/A DRAWING NO / CAD FILE LCDX4-14AH-CUST