


PANDUIT PART NO.	DESCRIPTION	WEIGHT
CJ64XXXXXY	6 POSITION, 4 WIRE TERMINATION CAP	1.62 lb/100 PCS. (.738 g/100 PCS.)
CJ66XXXXXY	6 POSITION, 6 WIRE TERMINATION CAP	1.62 lb/100 PCS. (.738 g/100 PCS.)
CJ66UXXXXXY	6 POSITION, 6 WIRE MODULAR JACK TERMINATION CAP IS COLOR CODED FOR USOC WIRING SCHEME	1.62 lb/100 PCS. (.738 g/100 PCS.)

- NOTE:
- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
 - MATERIAL:
JACK HOUSING - ABS
NOMINAL WALL THICKNESS .078(2.01).
TERMINATION CAP - POLYCARBONATE.
THIS PART IS DESIGNED FOR USE WITH MINI-COM PLATES AND BOXES.
 - MEETS ALL CATEGORY 3 PERFORMANCE REQUIREMENTS AS DEFINED BY EIA/TIA.
 - DIMENSIONS IN PARENTHESIS ARE IN METRIC.

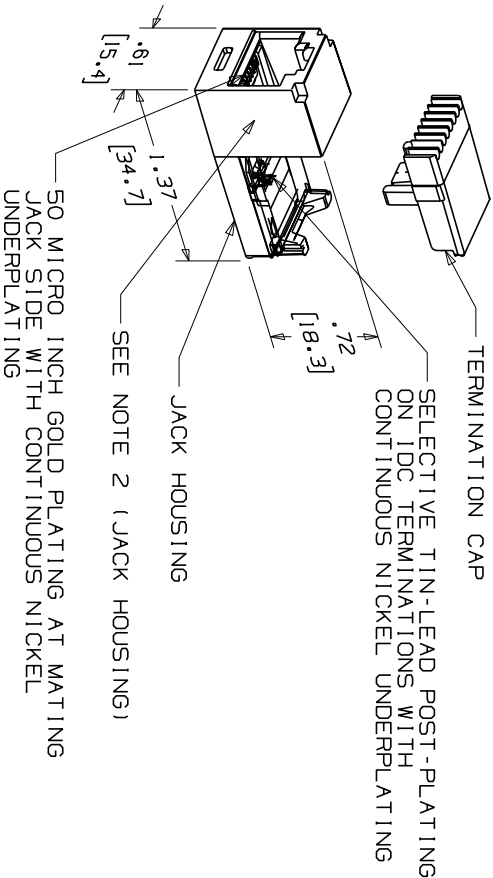

GND FILENAME/LAYERS									
M02479NJ_DC349_00A.PRT									
PANDUIT									
CORP. TINLEY PARK, ILLINOIS									
MINI-JACK CATEGORY 3 TWISTED									
PAIR CONNECTOR MODULE									
CUSTOMER DRAWING									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) ± .03 (.XXX) ± .005 (.XXX) ± .01 ANGLES ± 1°									
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.									
SCALE									
NONE									
DRAWING NO.									
02479-349									
DWG									
A									
SIZE									
REV									
DATE									
BY									
CHK									
DESCRIPTION									
RELEASED TO PRODUCTION									
ECN									
CHK									
CUST									
SUP									
DATE									
3-25-06									
CHECKED BY									
DRAWN BY									
NER									
MATERIAL:									
AS NOTED									