


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/07/10	D.N.

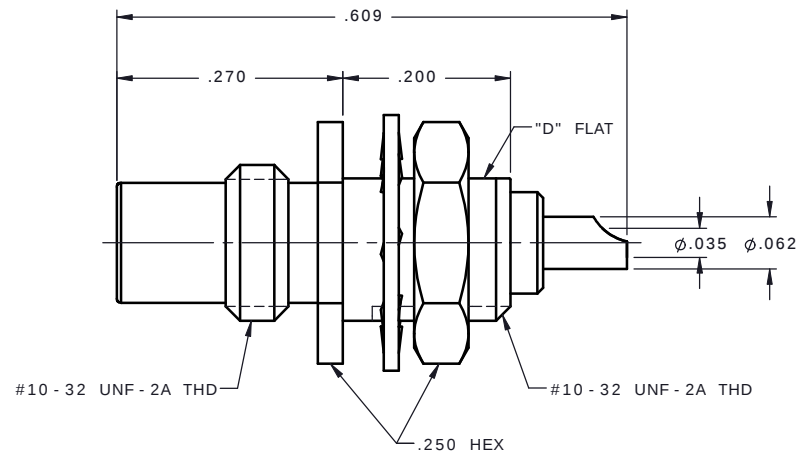

CONFORMS TO MIL - PRF - 39012 / 77 - 0002

NOTES:

MATERIALS:

1. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. BODY = GOLD PLATE PER MIL - G - 45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL - C - 14550.
2. CONTACT = GOLD PLATE PER MIL - G - 45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ - N - 290.
3. ALL OTHER METAL PARTS = GOLD PLATE PER MIL - G - 45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL - C - 14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN:	DATE		Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.		
		D.N.	07/07/10				
DECIMAL		CHKD:	DATE	SMC STRAIGHT MALE JACK BULKHEAD FRONT MOUNT SOLDER POT RECEPTACLE			
		M.J.	07/07/10				
		APVD:	DATE	1019 - 1511 - 999			
		J.M.	07/07/10				
REFERENCE:		MATERIALS & FINISHES:		SIZE	FSCM NO.	DWG NO.	REV
ORIGINATED: D.N. DATE: 07 - 07 - 10		SEE NOTES		A	19505	1019 - 1511 - 999	A
				SCALE	6:1	THIRD ANGLE PROJECTION	SHEET 1 OF 1

1019 - 1511 - 999