









LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		A	REVISED PER ECO-11-014734	19JUL11	HMR	FB

D

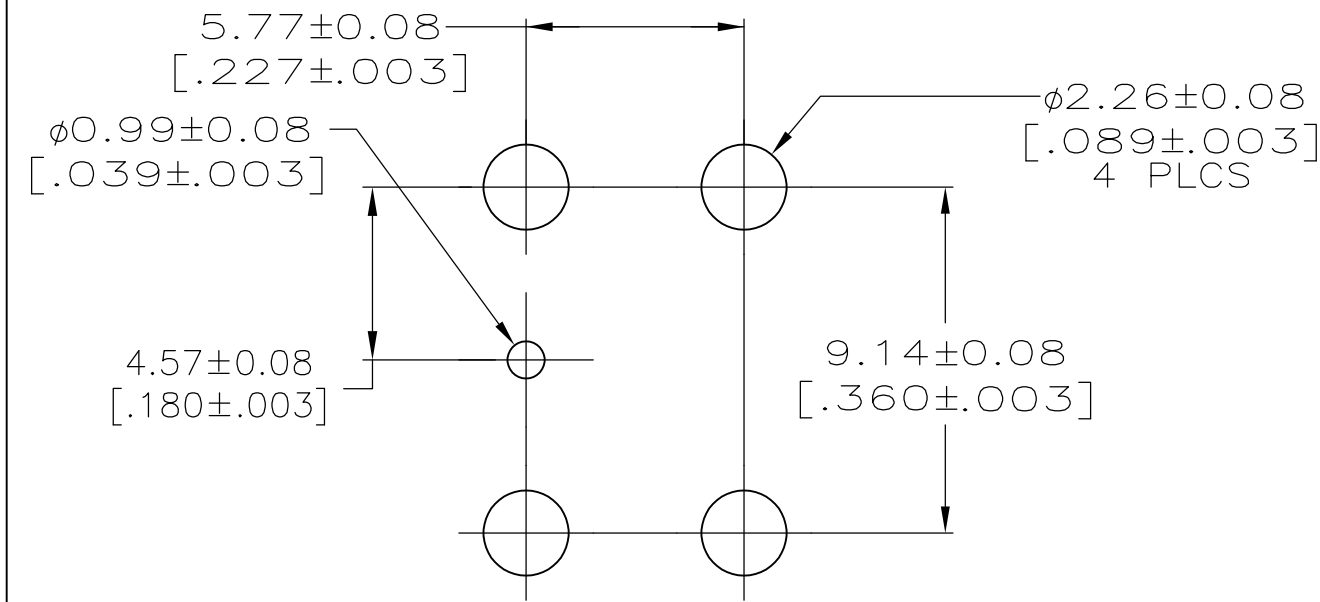

PCB CONFIGURATION

C

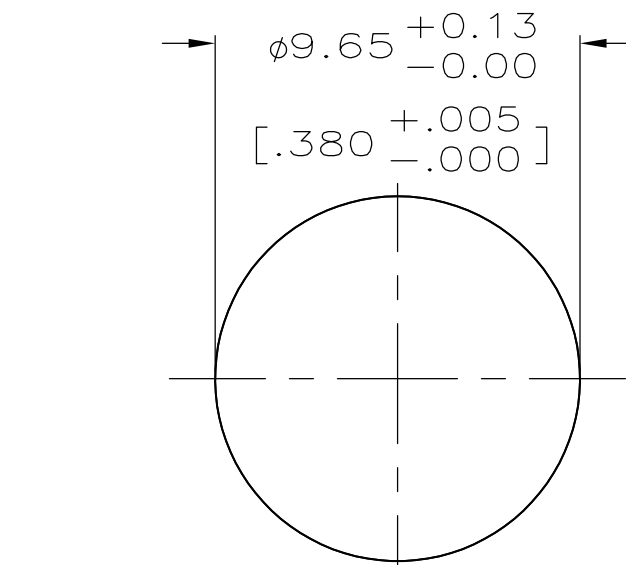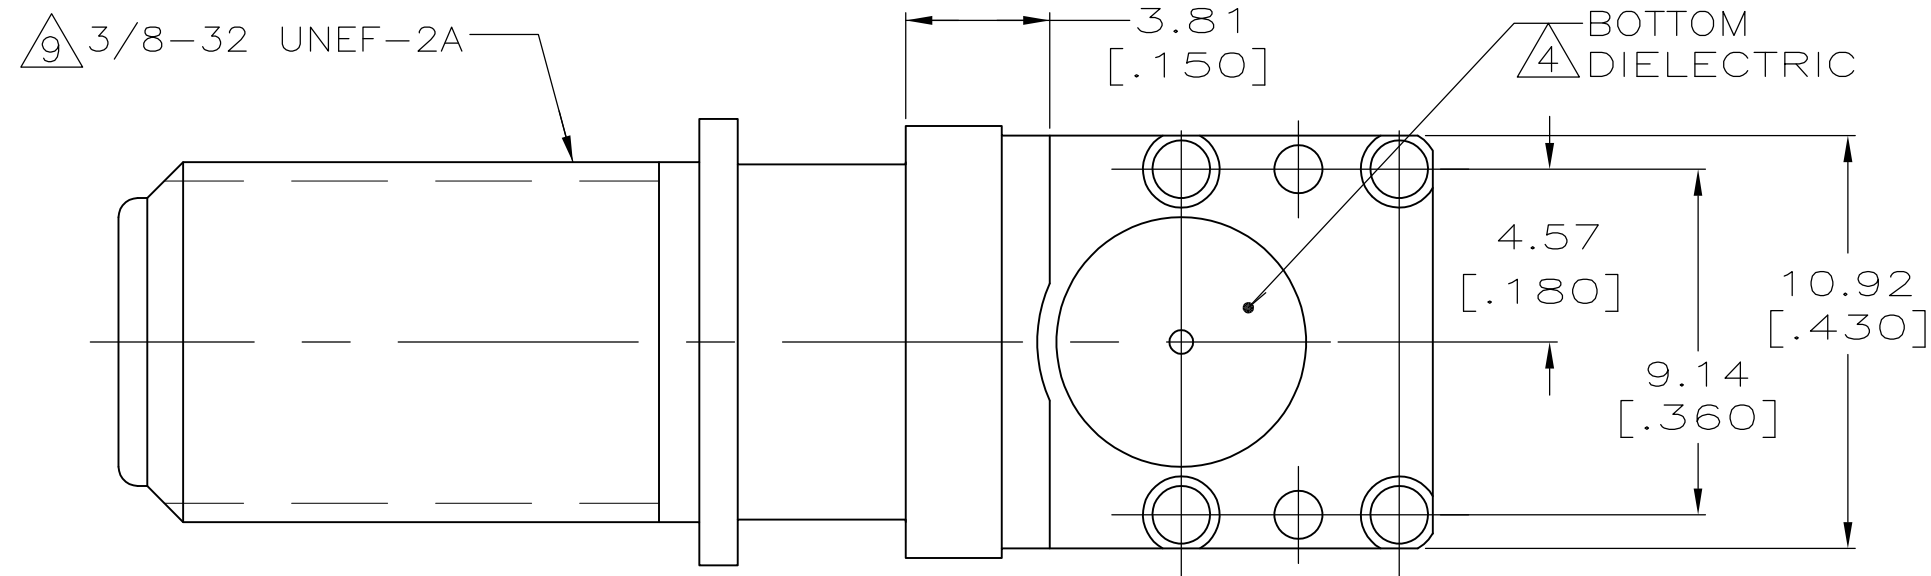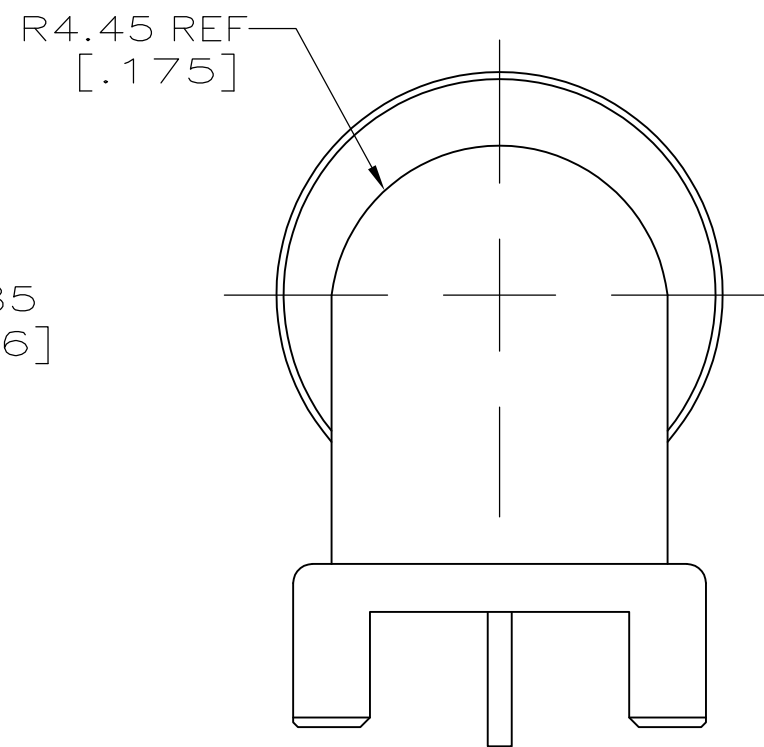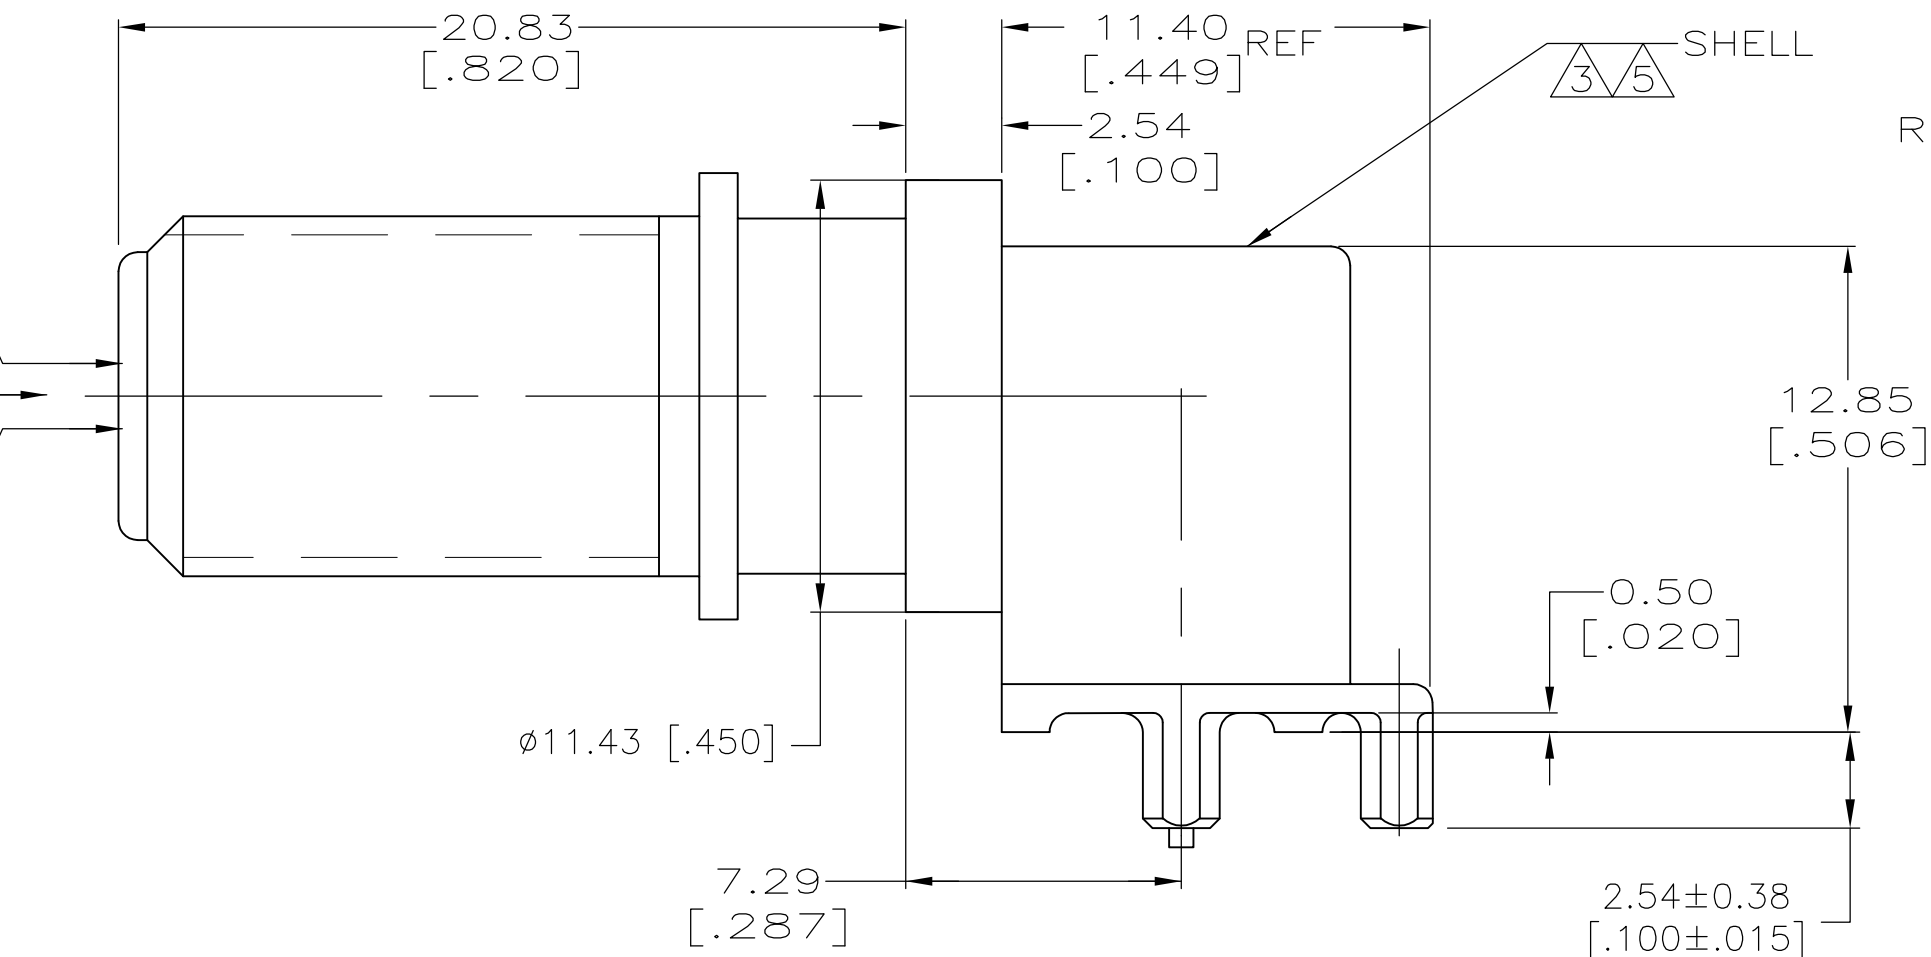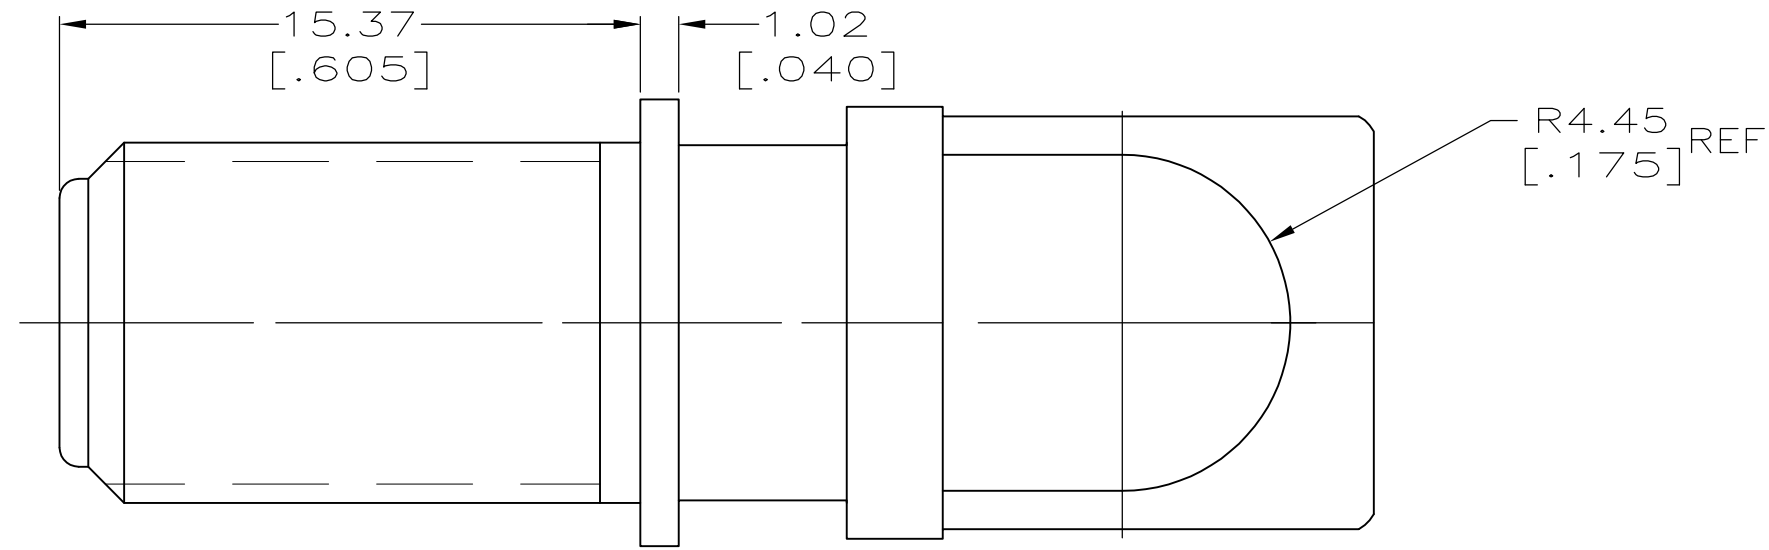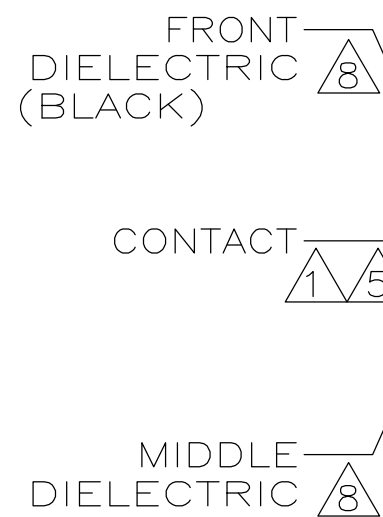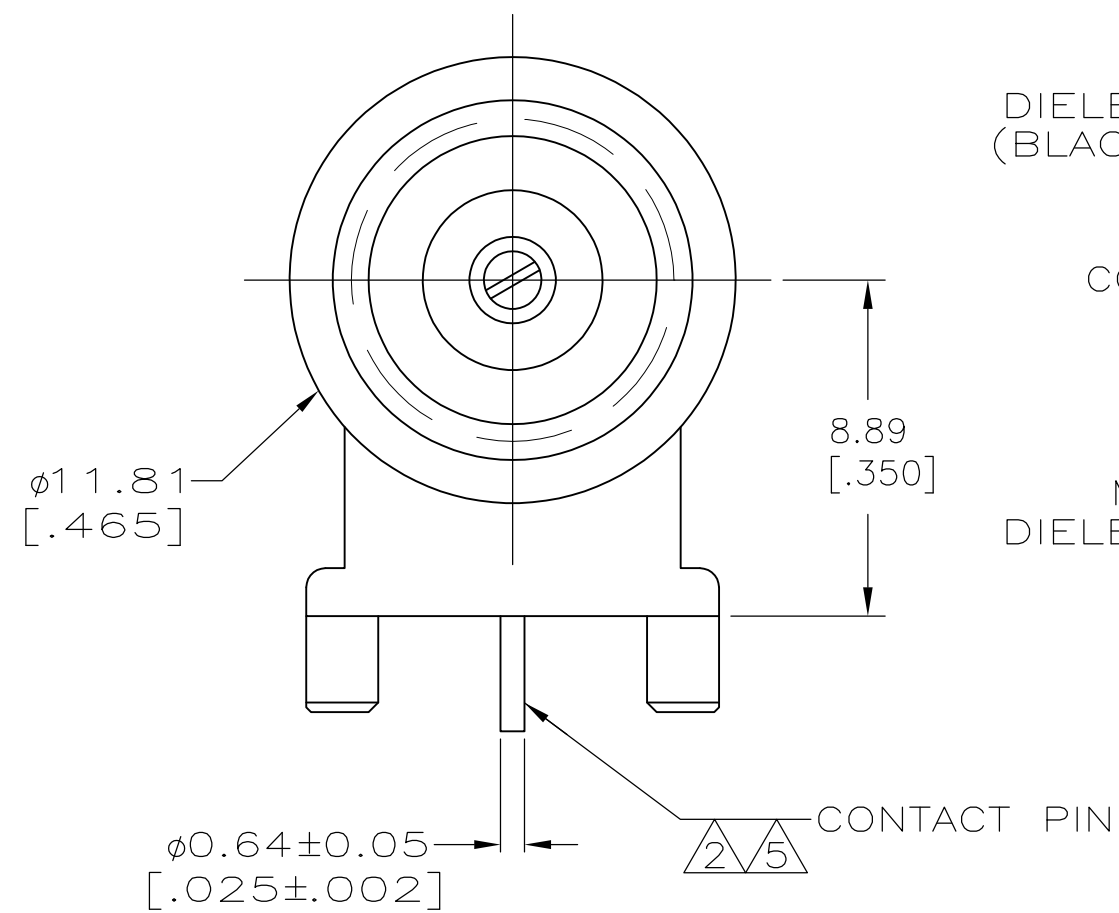

SUGGESTED PANEL CUTOUT

- 1 PHOSPHOR BRONZE PER QQ-B-750.
- 2 BRASS PER ASTM-B-453
- 3 ZINC PER QQ-Z-363.
- 4 ACETAL, GENERAL PURPOSE
- 5 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK. NICKEL PLATE PER QQ-N-290 1.27 μm [.000050] MINIMUM THICK.
- 6 CONNECTOR WILL ACCEPT CENTER CONDUCTOR DIAMETER RANGE OF 0.56[.022]–1.19[.047]
- 7 RETURN LOSS: –20dB MIN AT 1 GHz.
- 8 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 9 MAJOR DIA MODIFIED TO .365 REF.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	02FEB2005	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK	02FEB2005				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	02FEB2005	NAME			
0 PLC ± -		PRODUCT SPEC		JACK, PCB, RIGHT ANGLE, SEALED, F SERIES			
1 PLC ± -		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -		WEIGHT		A2	00779	C=6274430	-
3 PLC ± 0.20 [.008]		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV A			
4 PLC ± -							
ANGLES ± -							
FINISH							