


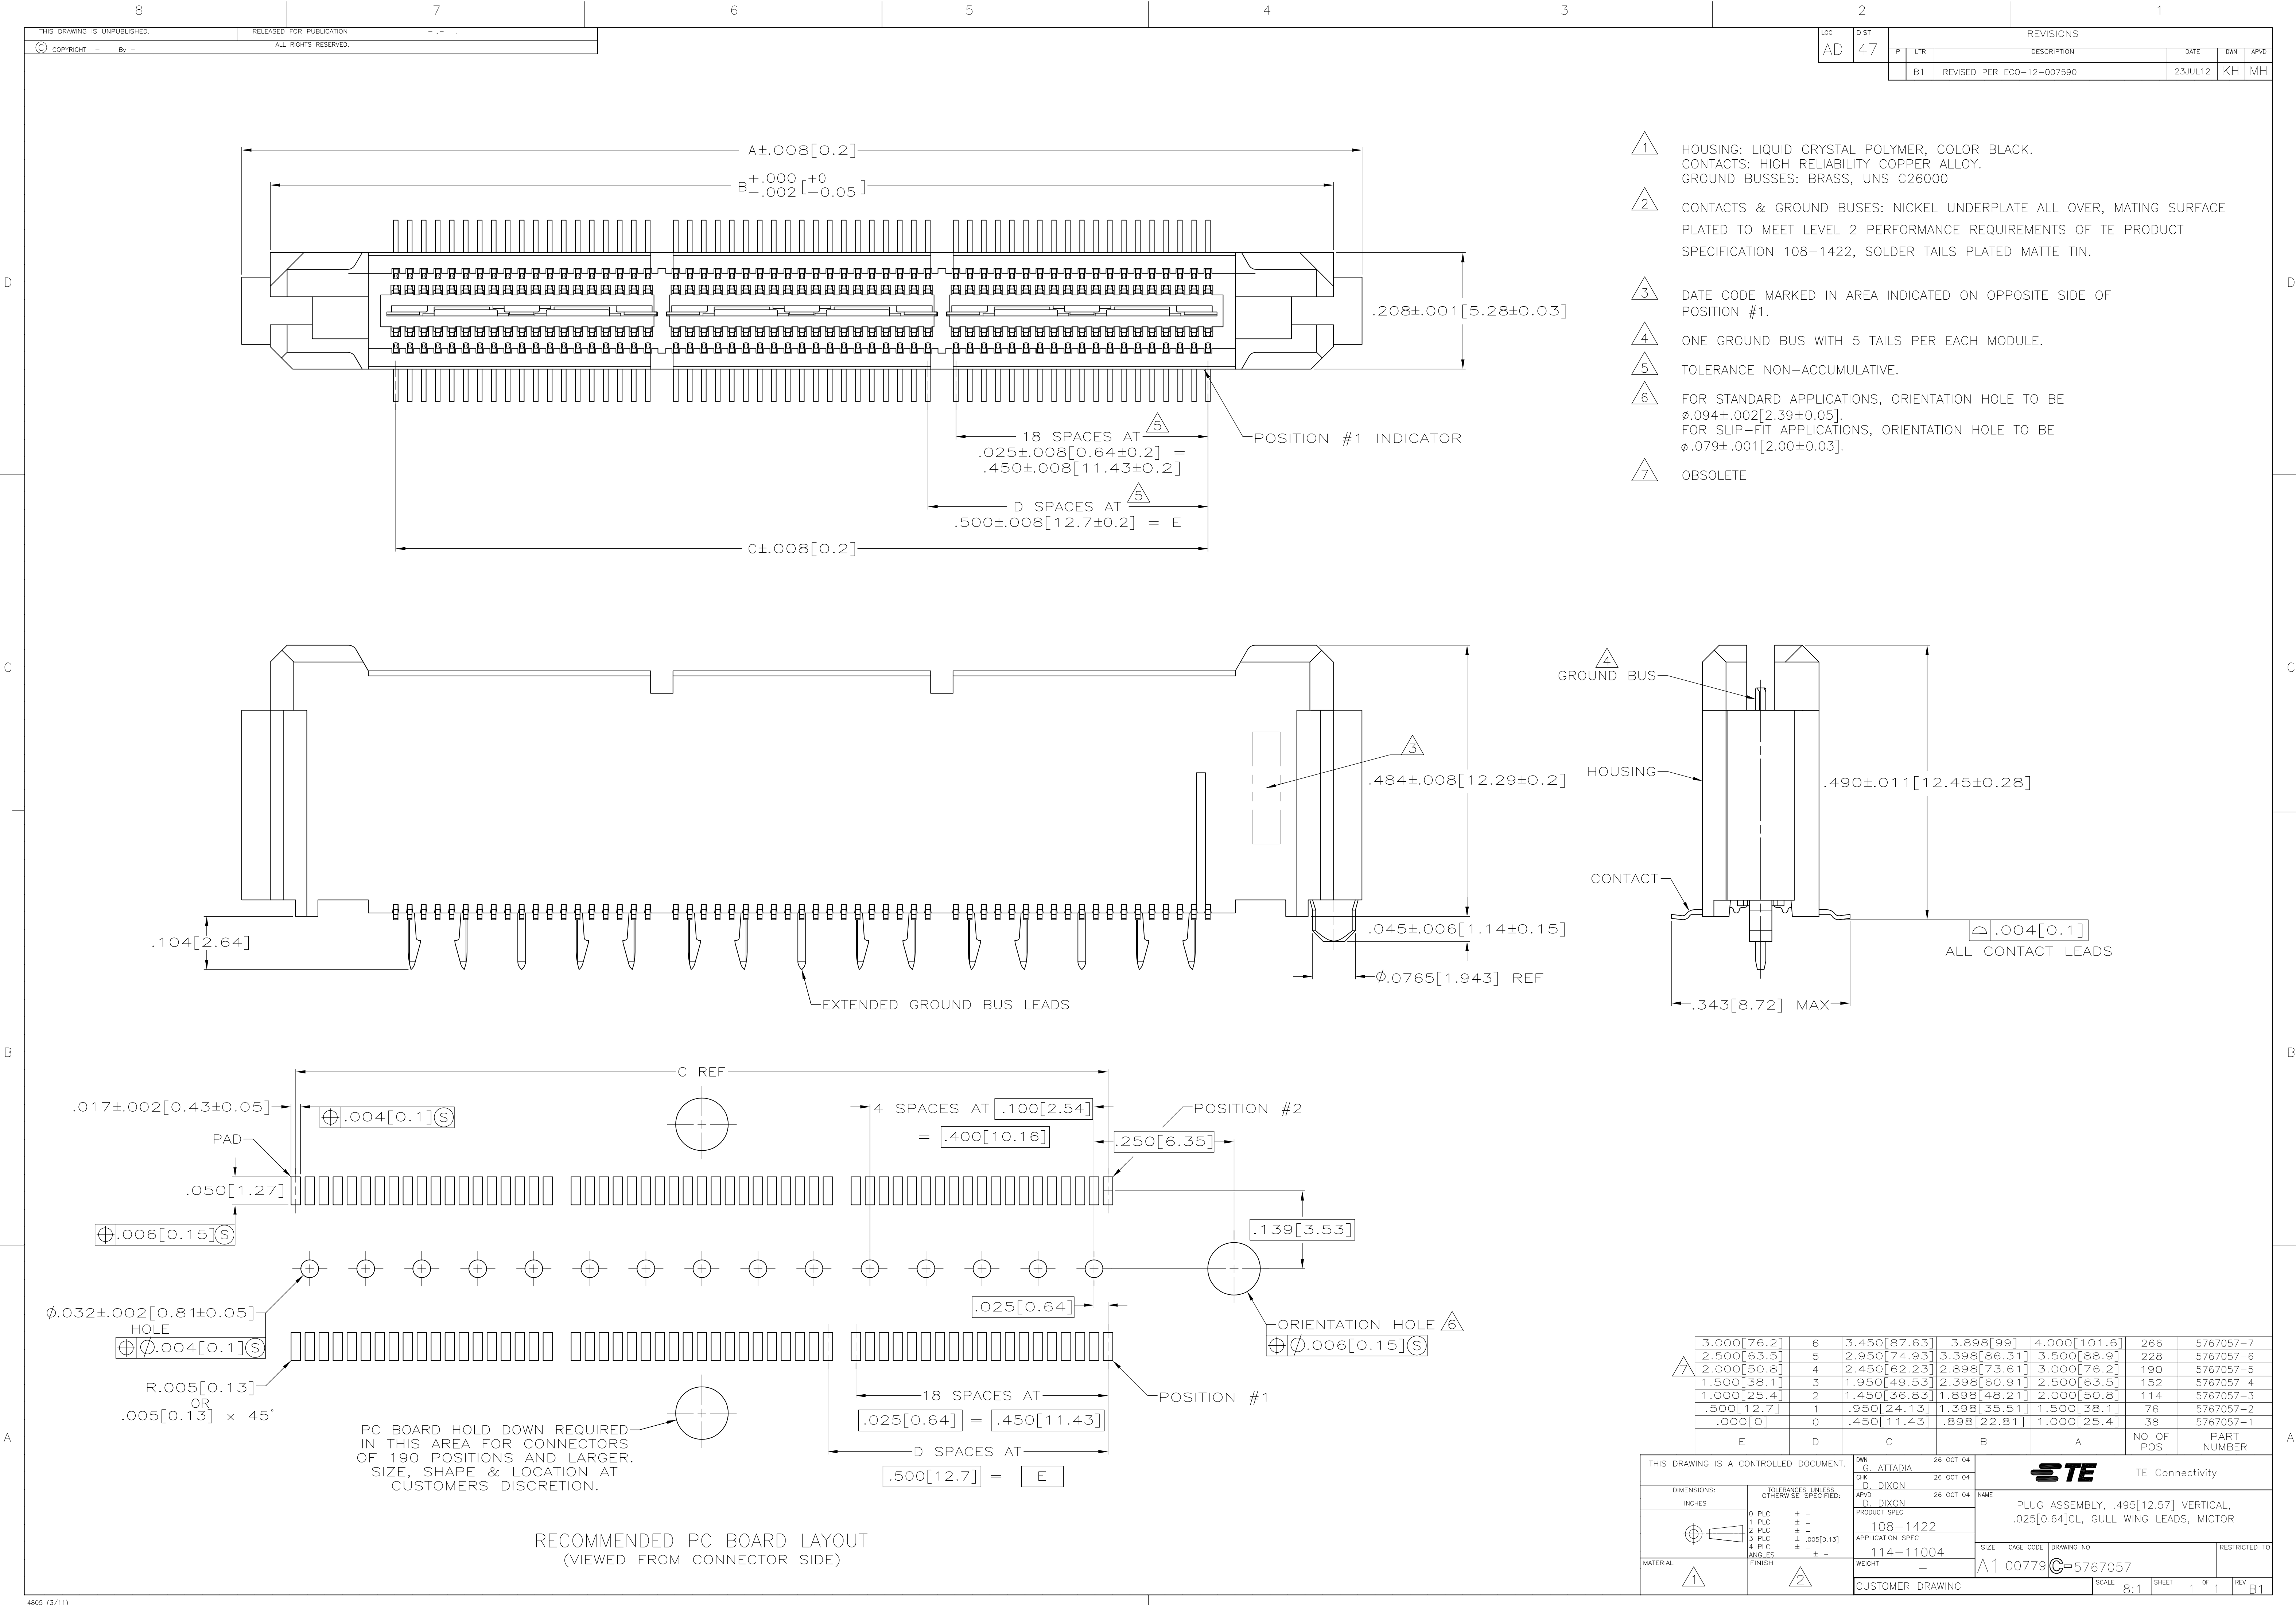

3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	5767057-7
2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228	5767057-6
2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	5767057-5
1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	5767057-4
1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	5767057-3
.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	5767057-2
.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	5767057-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA 26 OCT 04	TE Connectivity	
DIMENSIONS: INCHES		CHK D. DIXON 26 OCT 04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005(0.13) 4 PLC ± - ANGLES ± -		APVD D. DIXON 26 OCT 04	PRODUCT SPEC 108-1422	
MATERIAL		APPLICATION SPEC 114-11004	SIZE A1	
FINISH		WEIGHT -	CAGE CODE 00779	
1		CUSTOMER DRAWING		RESTRICTED TO -
2		SCALE 8:1		SHEET 1 OF 1
		REV B1		